This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

+ *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
+ *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
+ *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
+ *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at `http://books.google.com/`

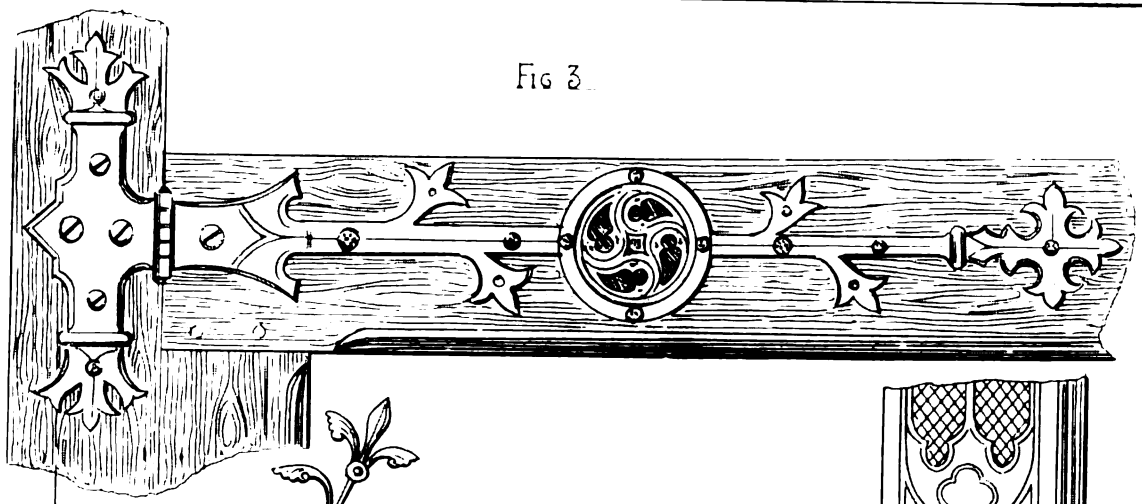

Fig 3



Fig 2

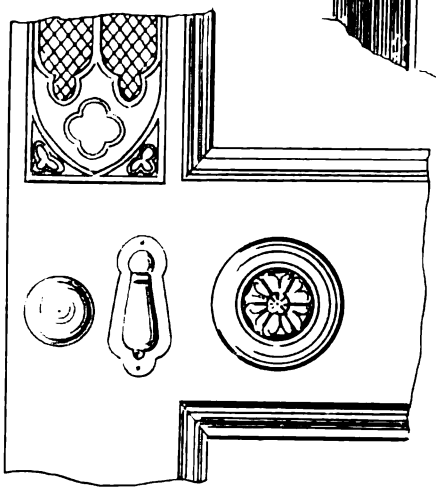

Fig 4

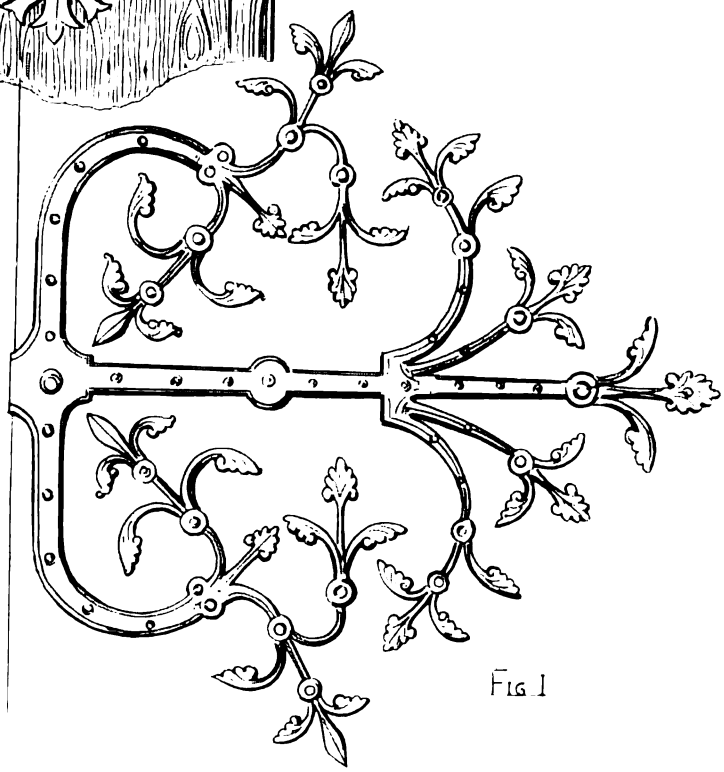

Fig 1

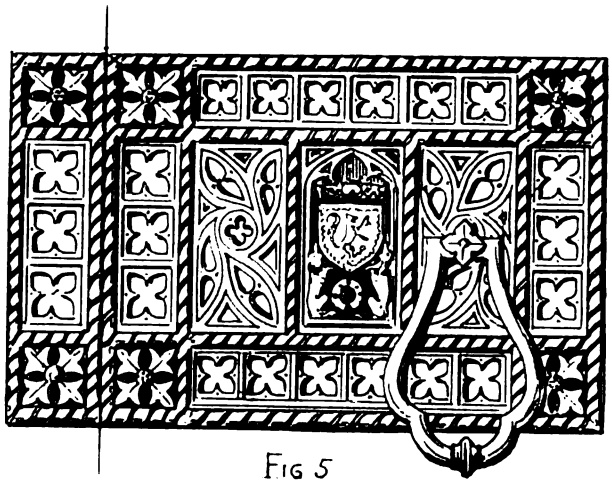

Fig 5

N° 1 N° 2 N° 3 N° 4

The true principles of pointed or Christian architecture

Augustus Welby Northmore Pugin

Fig 6

Digitized by Google

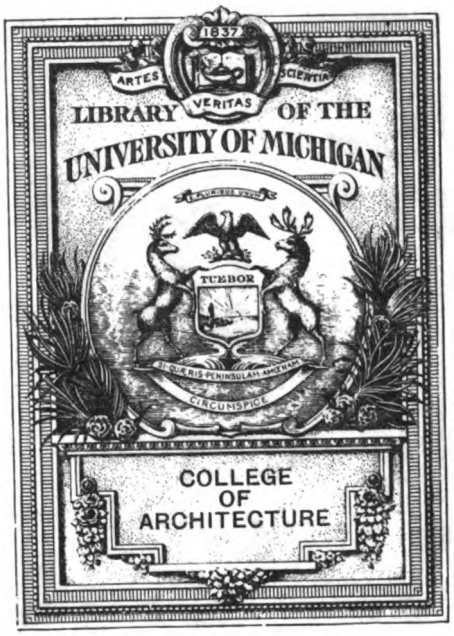

Digitized by Google

Digitized by Google

Digitized by Google

Digitized by Google

London Published by John Weale 59 High Holborn 1841.

Digitized by Google

Digitized by Google

Digitized by Google

THE TRUE PRINCIPLES

OF

Pointed or Christian Architecture:

SET FORTH IN

TWO LECTURES DELIVERED AT ST. MARIE'S, OSCOTT,

BY

A. WELBY PUGIN,

ARCHITECT,

AND PROFESSOR OF ECCLESIASTICAL ANTIQUITIES IN THAT COLLEGE.

LONDON: JOHN WEALE.

M.CCM.XLI.

Digitized by Google

Archit
NA
440
.P98

London:
PRINTED BY W. HUGHES, KING'S HEAD COURT, GOUGH SQUARE.

THE INK SUPPLIED BY MESSRS. SHACKELL AND LYONS.

Digitized by Google

LIST OF PLATES.

FRONTISPIECE.

PLATE I.	Columns and Buttresses	*to face p.*	3
II.	Ancient and Modern Masonry		18
III.	Metal-Work		20
IV.	Ornamental Iron-Work		21
V.	Almery in a Reliquary Chamber		32
VI.	Ancient and Modern Roofs		34
VII.	Gable Ends—Ancient, &c.		39
VIII.	Ancient Wood-Work		40
IX.	General Prospect of St. Mary Magdalen College, Oxford		51

47 WOOD-CUTS.

31 VIGNETTES.

78

249959

Digitized by Google

Digitized by Google

PRINCIPLES

OF

POINTED OR CHRISTIAN ARCHITECTURE.

LECTURE I.

THE object of the present Lecture is to set forth and explain the true principles of Pointed or Christian Architecture, by the knowledge of which you may be enabled to test architectural excellence. The two great rules for design are these: 1*st*, *that there should be no features about a building which are not necessary for convenience, construction, or propriety;* 2*nd*, *that all ornament should consist of enrichment of the essential construction of the building*. The neglect of these two rules is the cause of all the bad architecture of the present time. Architectural features are continually tacked on buildings with which they have no connexion, merely for the sake of what is termed effect; and ornaments are *actually constructed*, instead of forming the decoration of *construction*, to which in good taste they should be always subservient.

In pure architecture the smallest detail should *have a meaning or serve a purpose;* and even the construction itself *should vary with the material employed*, and the designs should be adapted to the material in which they are executed.

Strange as it may appear at first sight, it is in *pointed architecture alone that these great principles have been carried out;* and I shall be able to illustrate them from the vast cathedral to the simplest erection. Moreover, the architects of the middle ages were the first who *turned*

Digitized by Google

the natural properties of the various materials to their full account, and made *their mechanism a vehicle for their art.*

We shall have therefore to consider ornament with reference to construction and convenience, and ornament with reference to architectural propriety. Construction must be subdivided and treated under three distinct heads,—stone, timber, and metal; brick might indeed be added, but as the principles of its construction are similar to those of stone, I shall not make any distinction; and as for plaster, when used for any other purpose than coating walls, it is a mere modern deception, and the trade is not worthy of a distinction.

To begin with stone. A pointed church is the masterpiece of masonry. It is essentially a stone building; its pillars, its arches, its vaults, its intricate intersections, its ramified tracery, are all peculiar to stone, and could not be consistently executed in any other material. Moreover, the ancient masons obtained great altitude and great extent with a surprising economy of wall and substance; the wonderful strength and solidity of their buildings are the result, not of the *quantity or size of the stones* employed, but of the *art of their disposition*. To exhibit the great excellence of these constructions, it will be here necessary to draw a comparison between them and those of the far-famed classic shores of Greece. Grecian architecture is essentially *wooden* in its construction; it originated in wooden buildings, and never did its professors possess either sufficient imagination or skill to conceive any departure from the original type. Vitruvius shows that their buildings were formerly composed of trunks of trees, with lintels or brestsummers laid across the top, and rafters again resting on them. This is at once the most ancient and barbarous mode of building that can be imagined; it is heavy, and, as I before said, essentially wooden; but is it not extraordinary that when the Greeks commenced building in stone, the *properties of this material did*



A Wooden Building the origin of Greek Temples.

Digitized by Google

Digitized by Google

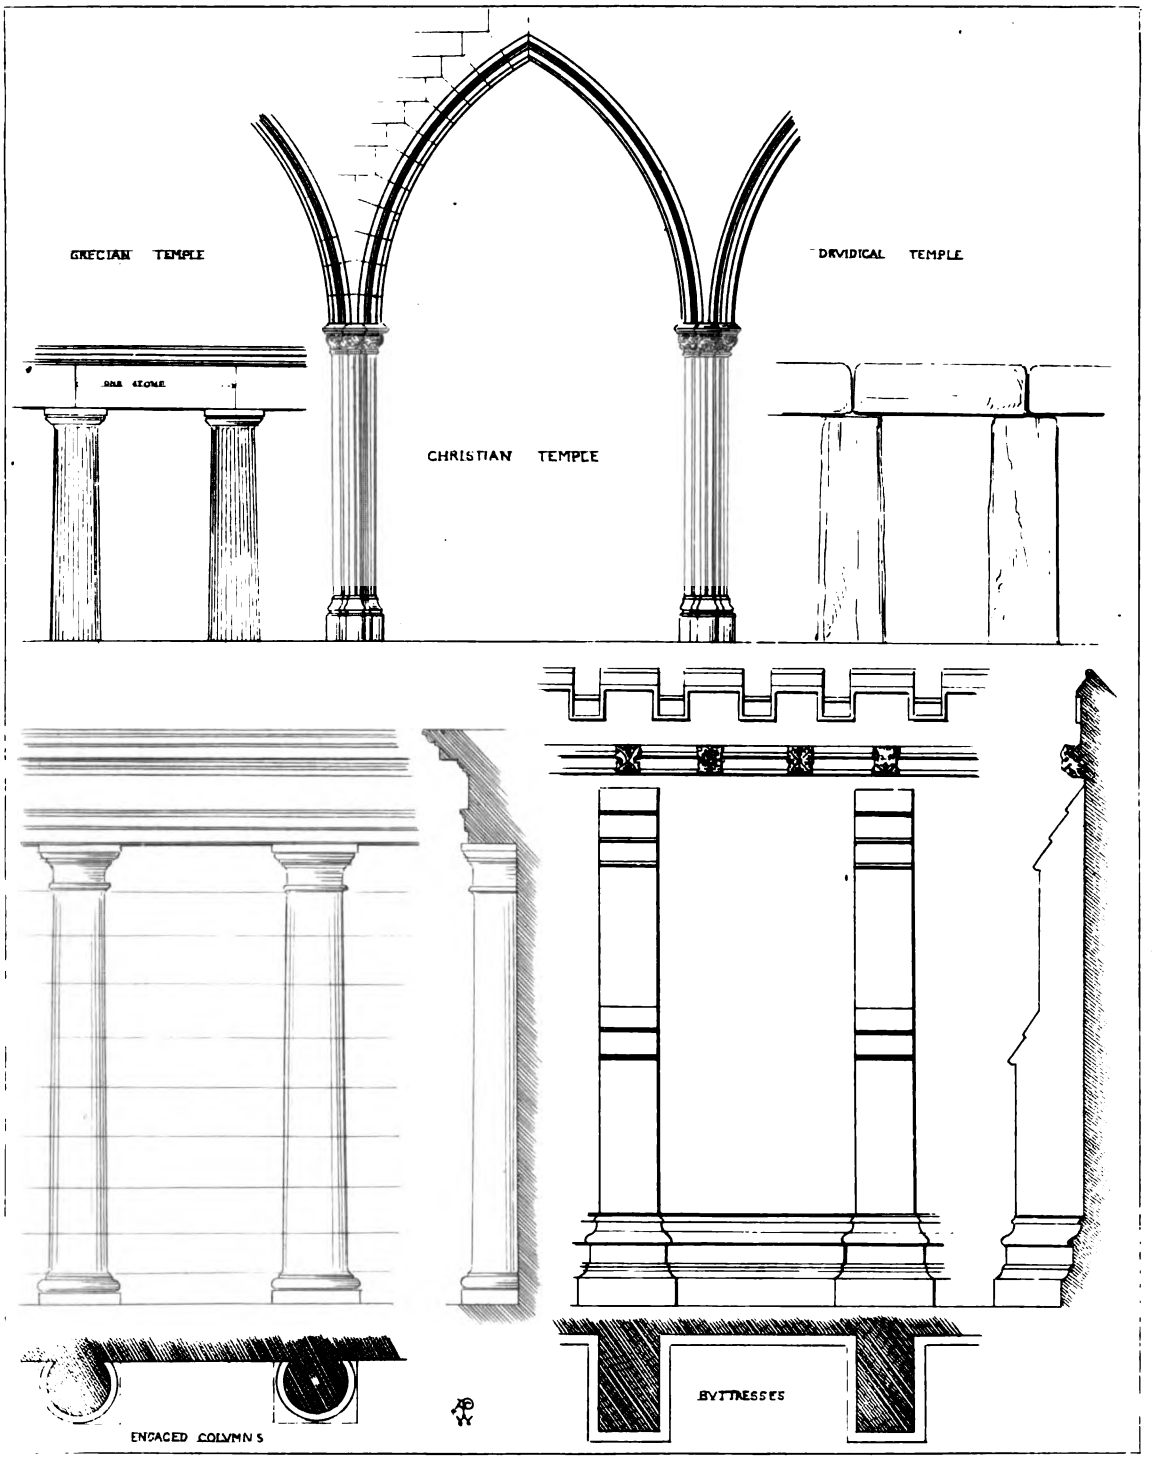

Plate I.

London Published by John Weale 59 High Holborn 1841

UofM

Digitized by Google

Digitized by Google

Digitized by Google

not suggest to them some different and improved mode of construction? Such, however, was not the case; they set up stone pillars as they had set up trunks of wood; they laid stone lintels as they had laid wood ones, *flat across;* they even made the construction appear still more similar to wood, by carving triglyphs, which are merely a representation of the beam ends. The finest temple of the Greeks is constructed on the *same principle* as a large wooden cabin. As illustrations of history they are extremely valuable; but as for their being held up as the standard of architectural excellence, and the types from which our present buildings are to be formed, it is a monstrous absurdity, which has originated in the blind admiration of modern times for every thing Pagan, to the prejudice and overthrow of Christian art and propriety.

The Greeks erected their columns, like the uprights of Stonehenge, just so far apart that the blocks *they laid on them would not break by their own weight.* The Christian architects, on the contrary, during the *dark ages,* with stone scarcely larger than ordinary bricks, threw their lofty vaults from slender pillars across a vast intermediate space, and that at an amazing height, where they had every difficulty of lateral pressure to contend with. This leads me to speak of buttresses, a distinguishing feature of Pointed Architecture, and the first we shall consider in detail.—Plate I.

It need hardly be remarked that buttresses are necessary supports to a lofty wall. A wall of three feet in thickness, with buttresses projecting three feet more at intervals, is much stronger than a wall of six feet thick without buttresses. A long unbroken mass of building without light and shade is monotonous and unsightly; it is evident, therefore, that both for strength and beauty, breaks or projections are necessary in architecture. We will now examine in which style, Christian or Pagan, these have been most successfully carried out. Pointed architecture does *not conceal her construction, but beautifies it:* classic architecture seeks to conceal instead of decorating it, and therefore has resorted to the use of engaged columns as breaks for strength and effect;—nothing can be worse. A column is an architectural member which should only

Digitized by Google

be employed when a superincumbent weight is required to be sustained *without the obstruction of a solid wall;* but the moment a wall is built, the *necessity and propriety of columns cease*, and engaged columns always produce the effect of having once been detached, and the intermediate spaces blocked up afterwards.

A buttress in pointed architecture at once shows its purpose, and diminishes naturally as it rises and has less to resist. An engaged column, on the contrary, is overhung by a cornice. A buttress, by means of water tables, can be made to project such a distance as to produce a fine effect of light and shade. An engaged column can never project far on account of the cornice, and all the other members, necessarily according with the diameter of the column, would be increased beyond all proportion. I will now leave you to judge in which style the real intention of a buttress is best carried out.

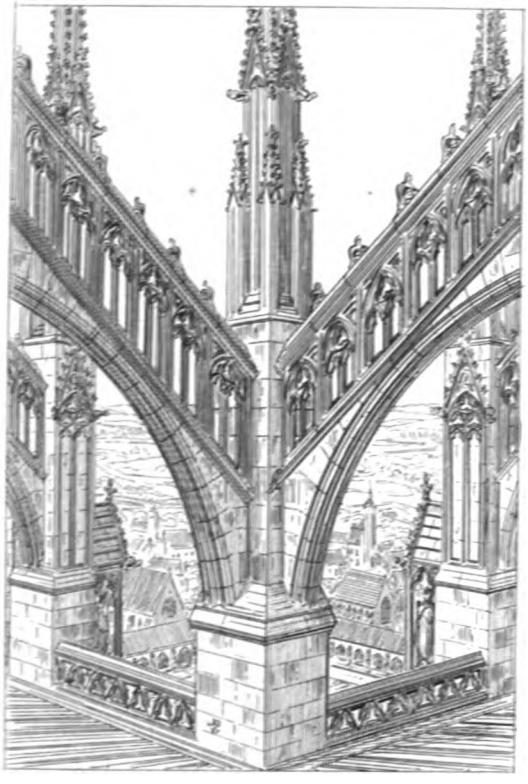

Flying Buttresses.

I have yet to speak of flying buttresses, those bold arches, as their name implies, by which the lateral thrust of the nave groining is thrown over the aisles and transferred to the massive lower buttresses. Here again we see the true principles of Christian architecture, by the conversion of an essential support of the building into a light and elegant decoration. Who can stand among the airy arches of Amiens, Cologne, Chartres, Beauvais, or Westminster, and not be filled with admiration

Digitized by Google

at the mechanical skill and beautiful combination of form which are united in their construction? But, say the modern critics, they are only props, and a bungling contrivance. Let us examine this. Are the revived pagan buildings constructed with such superior skill as to dispense with these supports? By no means; the clumsy vaults of St. Paul's, London, mere coffered semi-arches, without ribs or intersections, *have their flying buttresses; but as this style of architecture does not admit of the great principle of decorating utility*, these buttresses, instead of being made *ornamental, are concealed by an enormous screen*, going entirely round *the building. So that in fact one half of the edifice is built to conceal the other.* Miserable expedient! worthy only of the debased style in which it has been resorted to.

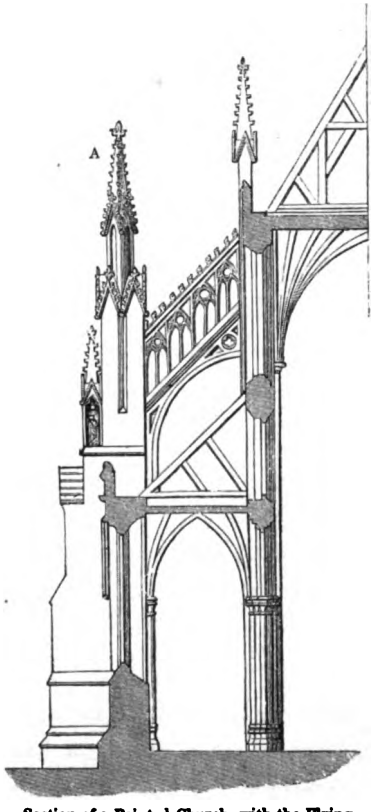

Section of a Pointed Church, with the Flying Buttresses decorated.

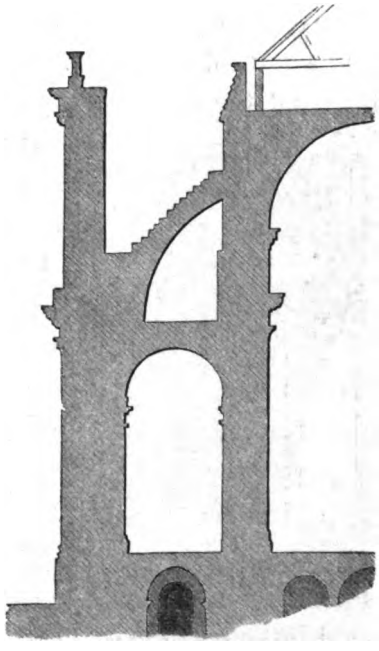

Section of St. Paul's, London, a Church built in the revived Pagan style, with the Flying Buttresses concealed by a Screen.

Digitized by Google

It is proper to remark that the cluster of pinnacles at A are not carried up for *mere ornament*, but, by their *weight*, to increase the resistance of the great pinnacle at the point of thrust.

We will now proceed, in the second place, to consider groining and vaulting, which are solely adapted to stone construction.

A groined ceiling is divided into compartments by means of ribs springing from caps or corbels, and uniting in bosses placed at the intersections; the spaces between the ribs are termed spandrils: the word boss signifies a spring of water, and has doubtless been applied to the key-stones of vaults, as the ribs seem to spring or separate from them.

Here again the great principle of decorating utility is to be observed. A stone ceiling is most essential in a large church, both for durability, security from fire,[1] and conveyance of sound. It is impossible to conceive stone ceilings better contrived than those of the ancient churches; they are at once light, substantial, beautiful, and lofty. 1st. They are light, because, their principal strength lying in the ribs, the intermediate spaces or spandrils are filled in with small light stones. 2nd. They are substantial, for all the stones being cut to a centre and forming portions of a curve, when united they are capable of resisting immense pressure, the keys or bosses wedging all together. 3rd. They are beautiful, for no ceiling can be conceived more graceful and elegant than a long perspective of lines and arches radiating from exquisitely carved centres. 4th. They are lofty, not only on account of the elevation at which they are placed, but that their construction permits the clerestory windows to be carried up level with the crown of the arch in the intermediate spaces.

[1] Within the last few years the roofs have been burnt off the cathedrals of Rouen, Chartres, and Bruges; and, owing to the strength of the stone vaulting, the interiors of these churches have scarcely been injured; while York Minster has twice been completely

Digitized by Google

In the groining of the later styles we find a great departure from the severe and consistent principles I have been describing. Henry the Seventh's Chapel at Westminster is justly considered one of the most wonderful examples of ingenious construction and elaborate fan groining in the world, but at the same time it exhibits the commencement of the bad taste, by *constructing its ornament instead of confining it to the enrichment of its construction.* I allude to the stone pendants of the ceiling, which are certainly extravagances. A key-stone is *necessary* for

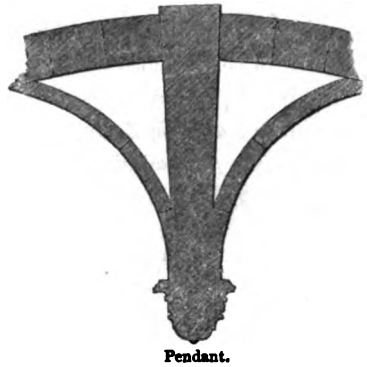

Pendant.

Boss.

the support of arched ribs; the older architects contented themselves with enriching it with foliage or figures, but those of the later styles allowed four or five feet of *unnecessary stone to hang down into the church,* and from it to branch other ribs upwards. This is at most an ingenious trick, and quite unworthy of the severity of Pointed or Christian architecture.[2]

gutted within a short period through the want of a stone groining; and yet a mere wood and plaster ceiling has been again constructed!

[2] This is one among many other symptoms of decline apparent in the later works in the pointed style. The moment the *flat* or *four-centred arch* was introduced, the spirit of Christian architecture was on the wane. *Height* or the *vertical principle,* emblematic of the resurrection, is the very essence of Christian architecture. It was to attain greater elevation with a given width that the pointed arch was employed; and the four-centred arch does not possess equal advantage in this respect with the old semi; and although some of the later buildings, as King's College Chapel, Cambridge, still retain the principle of internal height, with the use of the depressed arch, yet who can avoid being struck with the inconsistency of

Digitized by Google

In the third place, we will proceed to the use and intention of pinnacles and spiral terminations. I have little doubt that pinnacles are considered

running up walls to a prodigious elevation, and then, instead of *carrying out the principle, and springing a lofty groin*, losing a considerable increase of height by a flattened thrusting arched ceiling; the form of which is a sort of contradiction to the height at which it is commenced.

I do not make this observation by way of disparaging the merits of this stupendous building, but merely to show the early decay of the true principles of pointed architecture which may be traced even in that glorious pile.

We not unfrequently find the bulbous form employed in the Tudor period: this, which afterwards became the prevailing form of the Dresden and Flemish steeples, is of *the worst possible taste; and why?* Because *it is a form which does not result from any consistent mode of constructing a covering*, and, on the contrary, requires by its shape *to be constructed*, as will be seen by the annexed sketch; by the side of which I have placed a spire, the severe form and decoration of which are quite consistent with the true principles of rendering the necessary roof or covering of a tower elegant in appearance, without *departing* from *essential construction* for the sake of *ornament*.



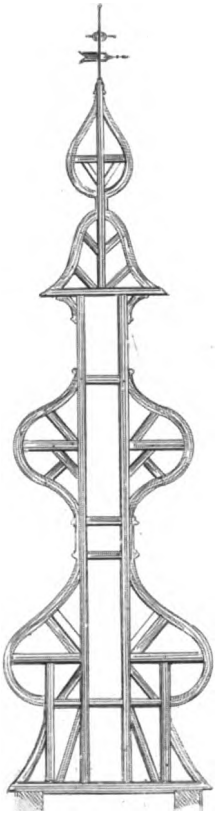

Bulbous Covering or Steeple, in the debased style.

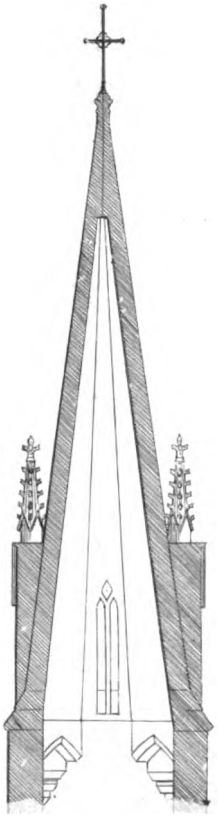

Spiral Covering or Steeple, in the Christian style.

One of the greatest defects of St. Paul's, London, is its fictitious dome. *The dome that is seen* is not *the dome of the church*, but a mere construction for effect. At St. Peter's the dome *is the actual covering of the building*, and is therefore constructed in that respect on the true principle; but, as will be perceived by the an-

Digitized by Google

by the majority of persons as mere ornamental excrescences, introduced solely for picturesque effect. The very reverse of these is the case; and I shall be able to show you that their introduction is warranted by the soundest principles of construction and design. They should be regarded as answering a double intention, both mystical and natural: their mystical intention is, like other vertical lines and terminations of Christian architecture, to represent an emblem of the Resurrection; their natural intention is that of an upper weathering, to throw off rain. The most useful covering for this purpose, and the one that would naturally suggest itself, is of the form represented in the annexed figure: only let this *essential form* be *decorated* with a finial and crockets, and we have at once a perfect pinnacle. Now the square piers of which these floriated tops form the terminations are all erected to answer a useful purpose; when they rise



nexed section, the upper part of St. Paul's is mere imposing show, constructed at a vast expense without any legitimate reason.

From the various symptoms of decline which I have shown to have existed in the later pointed works, I feel convinced that Christian architecture had gone its length, and it must necessarily have destroyed itself by departing from its own principles in the pursuit of novelty, or it must have fallen back on its pure and ancient models. This is quite borne out by existing facts. Now that the pointed style is reviving, we cannot successfully suggest any thing new, but are obliged to return to the spirit of the ancient work.



Section of the Dome of St. Paul's.

Indeed, if we view pointed architecture in its true light as Christian art, as the faith itself *is perfect, so are the principles on which it is founded.* We may indeed improve in mechanical contrivances to expedite its execution, we may even increase its scale and grandeur; but we can *never successfully deviate one tittle from the spirit and principles* of pointed architecture. We must rest content to *follow*, not to *lead;* we may indeed widen the road which our Catholic forefathers formed, but we can never depart from their track without a certainty of failure being the result of our presumption.

Digitized by Google

from the tops of wall buttresses, they serve as piers to strengthen the parapet, which would be exceedingly weak without some such support. Fig. S.

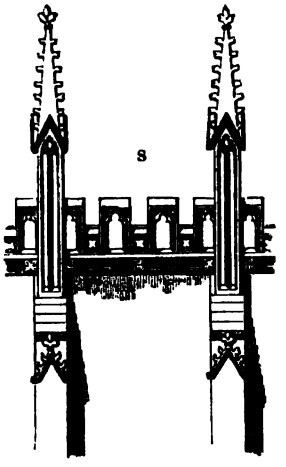

Their utility on the great piers which resist the flying buttresses has been already mentioned under the head of buttress. At the bases of great spires, the clusters of pinnacles are also placed to increase strength and resistance; in short, wherever pinnacles are introduced in pure pointed architecture, they will be found on examination to fulfil a useful end.

The same remarks will apply to the crocketed and floriated terminations of staircase and other turrets, which are in fact ornamented roofs; and I need hardly remark that turrets were not carried up without a legitimate reason.

Every tower built during the pure style of pointed architecture either was, or was intended to be, surmounted by a spire, which is the natural covering for a tower; a flat roof is both contrary to the spirit of the style, and it is also practically bad. There is no instance before the year 1400 of a church tower being erected without *the intention at least* of being covered or surmounted by a spire; and those towers antecedent to that period which we find without such terminations have either been left incomplete for want of funds, weakness in the sub-structure, or some casual impediment,—or the spires, which were often of timber covered with lead, have been pulled down for the sake of their material.[3] In fine, when towers were erected with flat embattled tops, *Christian architecture*

[3] The following glorious churches have been stripped of their spires since the views in Dugdale's Monasticon were taken:—Hereford Cathedral, Worcester Cathedral, Southwell Minster, Rochester Cathedral, Ely Cathedral, Ripon Minster, Finchal Abbey, and Lincoln Cathedral. It is to be remembered that these views were taken *above a century after the lead-stripping and spire-demolishing period commenced.*

Digitized by Google

was on the decline, and the omission of the ancient and appropriate termination was strong evidence of that fact. Towers surmounting gatehouses were never terminated by spires, for, being originally built for defence, the space at top was required for that purpose. This is the real reason why square-topped and embattled towers are said to be of a domestic character; so that even by persons unacquainted with the use and intentions of spires, they are associated with the idea of ecclesiastical architecture.

The pitch of roof in pointed architecture is another subject on which some useful observations may be made. It will be found, on examination, that the most beautiful pitch of a roof or gable end is an inclination sufficiently steep to throw off snow without giving the slate or lead covering *too perpendicular a strain*, which is formed by two sides on an equilateral triangle.

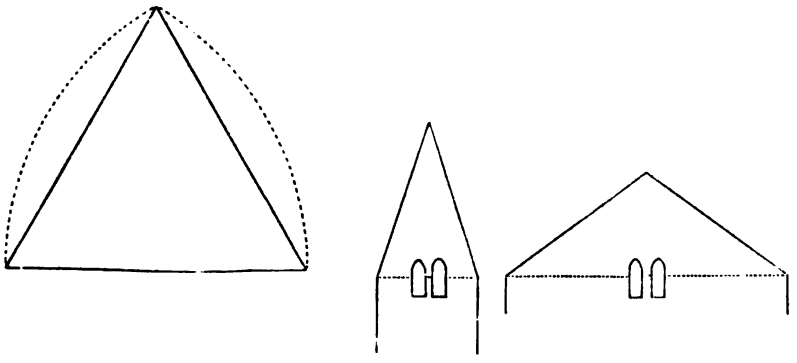

If this form be departed from, the gable appears either painfully acute or too widely spread. All really beautiful forms in architecture are based on the soundest principles of utility.

Practical men know that flat-pitched roofs, which are exceedingly ugly in appearance, are also but ill calculated to resist the action of weather. In slated roofs especially, gusts of wind actually blow under and lift up the covering: when the pitch is increased to its proper elevation, the whole pressure of the wind is *lateral*, and forces the covering closer to the roof.

Digitized by Google

I now come to speak, in the fourth place, of mouldings, on the judicious form and disposition of which a very considerable part of the effect of the building depends. Mouldings are the enrichment of splays of doorways, windows, arches, and piers, of base and string-courses, of weatherings and copings, and they are introduced solely on the principle of decorating the useful.

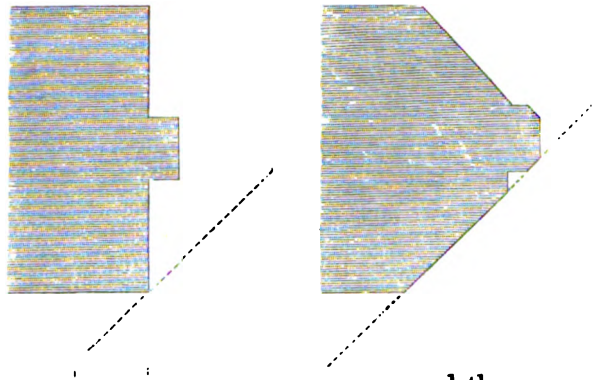

I will first point out the necessity of these splays and weatherings, and then proceed to consider the form and application of mouldings to them.

It will be readily seen that without a splay a considerable portion of light would be excluded, and that this form of jamb is necessary to the use and intention of a window.

In a doorway the convenience of splayed sides must be evident for ordinary ingress and egress. This form of jamb is therefore necessary to the use and intention of a doorway.

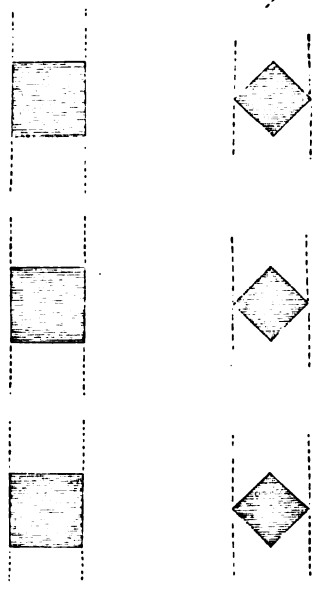

Square Piers supporting Arches. Splayed Piers supporting Arches.

The advantage of piers splayed, or placed diagonally over square ones, both for elegance and convenience, must be evident to all; the arch mould over them is consequently splayed. This form of pier and arch mould is therefore necessary for both piers and arches.

Great increase of solidity and strength is gained by projections at the

Digitized by Google

base of a building as sets-off; but were these projections left flat at top instead of being bevelled off, they would become lodgments for water.

The splayed or bevelled form is therefore necessary for base moulds. Strings and copings, the very intention of which is to throw off water, must be sloped, for the same reason.

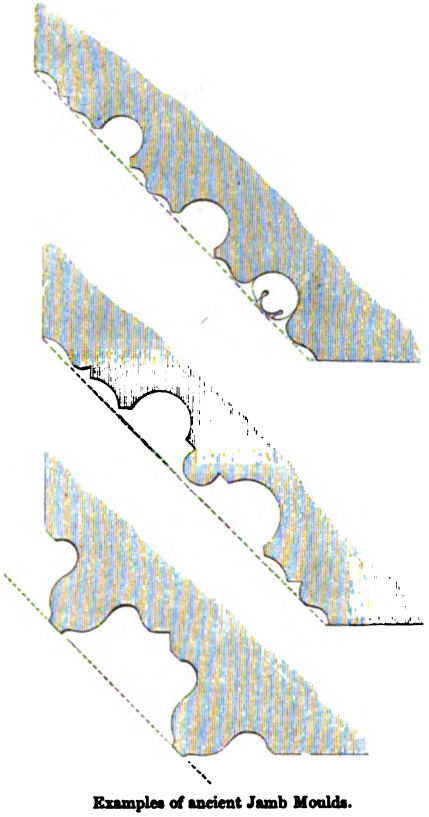

Examples of ancient Jamb Moulds.

The use of the splayed form being now demonstrated, I will proceed to consider the mouldings used to enrich it. All mouldings should be designed on the principle of light, shadow, and half tint; and the section of a moulding should be of such a form as to produce various and pleasing gradations of light and shadow. Monotony should be carefully avoided, also all cutting shadows near the outer edge, which have a meagre effect. The original splayed form should never be lost sight of in the sinkings of the mould, which ought not to be so extravagantly deep as to produce both a real and apparent weakness in the jamb.

All the mouldings of jamb are *invariably sunk from the face of the work.* A projecting mould in such a situation would be a useless excrescence, and contrary to the principles of pointed architecture, which do not admit of any unnecessary members. A hood mould projects immediately above the springing of the arch to receive the water running down the wall over the window, and convey it off on either side. This projection

Digitized by Google

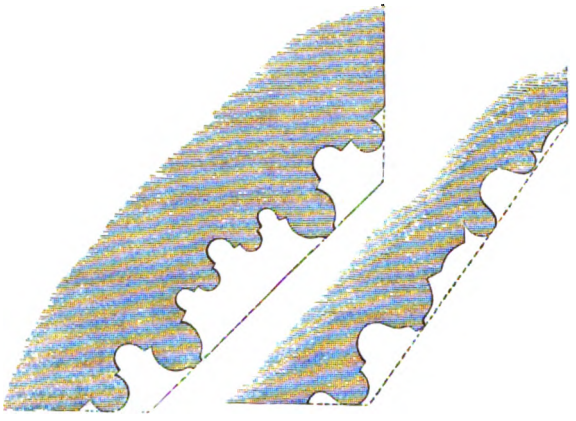

Examples of ancient Jamb Moulds.

answers a purpose, and therefore is not only allowable but indispensable in the pointed style; but a projection down the sides of jamb, where it would be utterly useless, is never found among the monuments of antiquity.

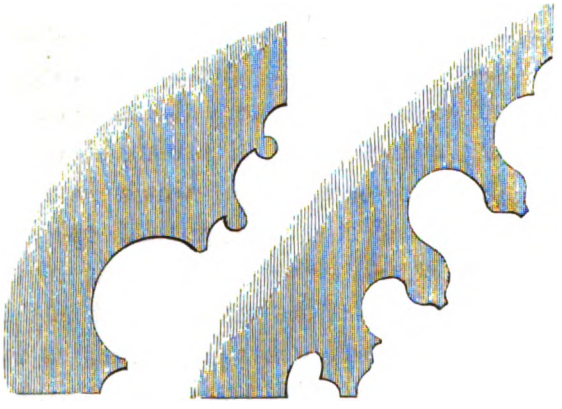

Modern Jamb Mould, weak and wiry.

French Jamb Mould of the late styles, *extravagantly* hollowed.

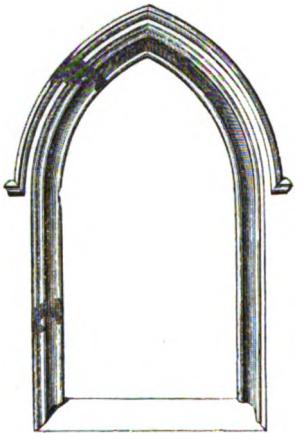

The mouldings round an arch are generally more subdivided than those of the jamb. This is carrying out the same principle that may be observed in vegetation, where the solid trunk spreads and divides as it rises upwards. The use of caps at the springing of arches is to receive the different moulds of jamb and arch, which could not be successfully united by any better means than foliated and moulded projections. Hence, in the later pointed continental churches, where the same moulds run up the jambs and round the arches without interruption, caps are entirely omitted; and the same thing is observable, under similar

Digitized by Google

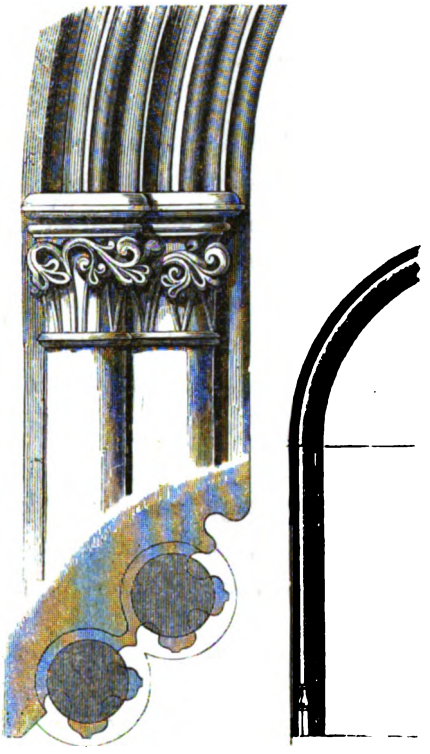

Caps at the transition from Jamb to Arch Mould.

circumstances, in the nave of Crowland Abbey, Lincolnshire.

The next class of mouldings I will notice are those belonging to base moulds, weatherings, and strings. I have shown above that the bevelled form is necessary for these projections; but when the weathering is of any depth, it is evident that the inclined plane cut by the horizontal joints of the masonry will produce what are technically called feather-edged joints, at A A A, which would be easily broken by the action of frost, and the joints themselves would be penetrated by water. To obviate this, all the varied and beautiful



Ancient examples of Base Moulds and Weatherings.

moulds of weatherings have been introduced, by the form of which the stones are strengthened at the joints, and they are protected from the action of water by the overhanging mould throwing it off to the next bevel.

These observations will apply equally to string-courses and copings.

Another important consideration relative to mouldings, and by which their profile should in a great measure be regulated, is the position in which they are placed with relation to the eye of the spectator. The

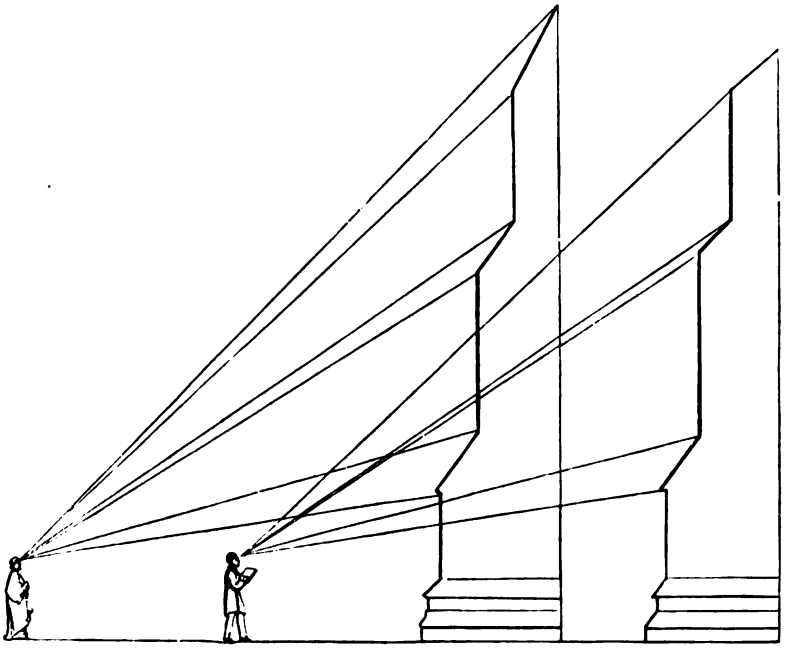

Digitized by Google

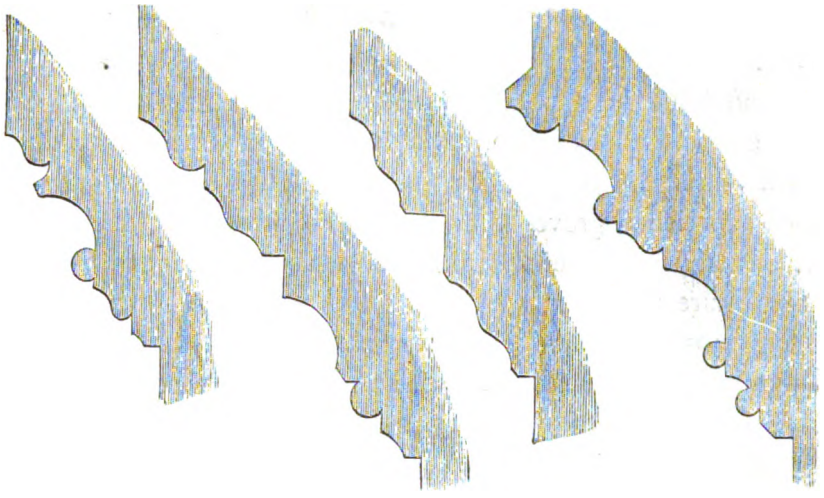

Ancient Profiles of Corbel Moulds.

slope of weatherings themselves is determined by this principle, the pitch increasing with the height that they are placed from the ground. Were this not attended to, the upper water table would be lost to a spectator, unless he was at a considerable distance from the building.

In corbel moulds the profile should *be so formed as to gain projection with strength,*

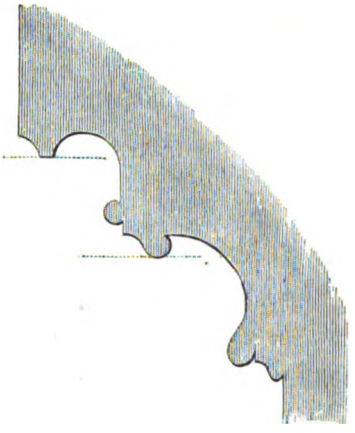

Modern and Weak Corbel Mould.

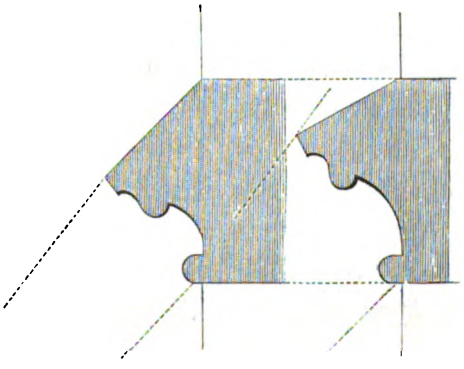

avoiding deep hollows and unnecessary nozings.

The apparent width of a string-course placed above the eye depends almost as much on the top bevel as on its actual width; for

Digitized by Google

string-courses of equal width, with different bevels, will vary considerably to the eye.

Every moulding in a pointed building must be designed and shaped on these consistent principles. The severity of Christian architecture requires a *reasonable purpose for the introduction of the smallest detail*, and daily experience proves that those who attempt this glorious style without any fixed idea of its unalterable rules, are certain to end in miserable failures.

Another most important, but now most neglected part of masonry, is the jointing of the stones. All bond and solidity is frequently sacrificed for what is called a neat joint, by setting one stone on end to form a jamb (Plate II. fig. A), when the same space in good old constructions would have been occupied by five or six stones tailing into the wall, and *lying in their natural bed* (fig. B); a point which should be most strictly attended to.

Or, if the jambs are built in courses, they are made as uniform as possible, like rustics (fig. C). By this means the effect of the window is spoiled; the eye, owing to the regularity of these projections, *is carried from the line of jamb to them*, while in the old masonry (fig. D) the irregular outline of the stones does not interfere with the mouldings of the window.

Another point to be remarked in the ancient masonry is the smallness of the stones employed: now, independently of this being the strongest mode of construction, it adds considerably to the effect of the building by increasing its apparent scale. *Large stones destroy proportion;* and to illustrate this I have given two representations of the same piece of architecture differently jointed. Figs. E, F.

Not only are the stones which are used in the ancient buildings exceedingly small, but they are also very irregular in size, and for the same reason as I have before mentioned, that the jointing might *not appear a regular feature*, and by its *lines interfere* with those of the building.

Digitized by Google

Digitized by Google

Digitized by Google

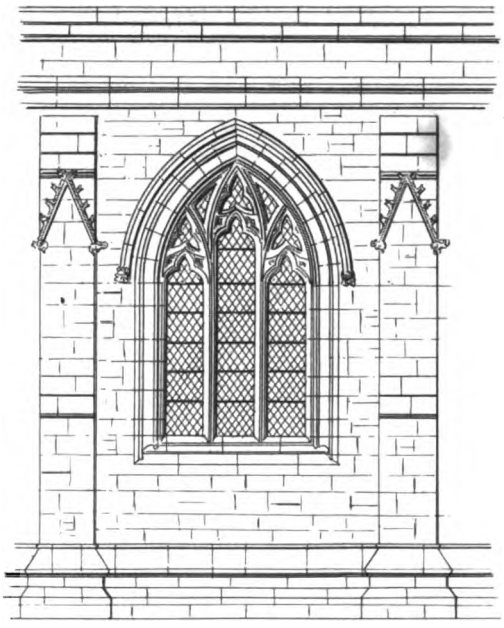

Fig F

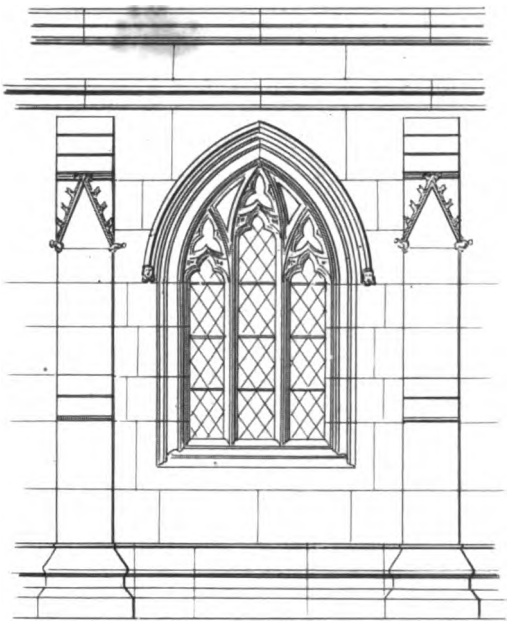

Fig E

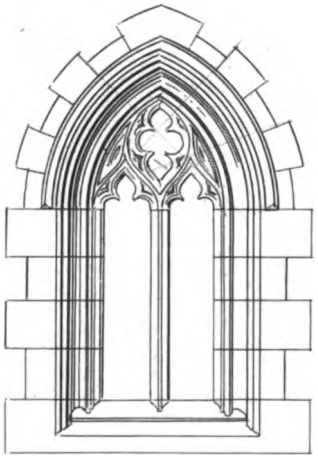

Fig C

MODERN REGULAR JOINTS

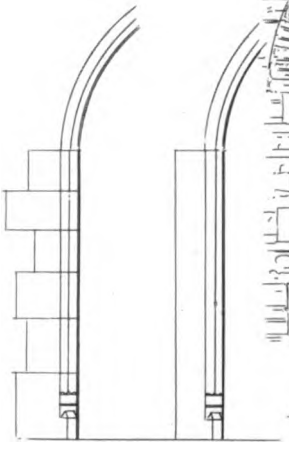

Fig B

Fig A

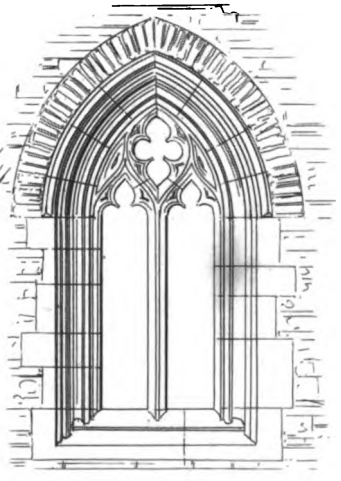

Fig D

ANTIENT IREGULAR JOINTS

Plate II.

London Published by John Weale. 59. High Holborn. 1841

Digitized by Google

Digitized by Google

In the early buildings the work was carried up in regular beds: there were as many joints in a detached pillar as in the wall, and equal space was occupied by the mortar in every part of the building. The joints of stone tracery should always be cut to the centre of the curve where they fall; and if the joint crosses three or four different *curves, its bed should vary with those curves;* and without this is rigidly adhered to in the construction

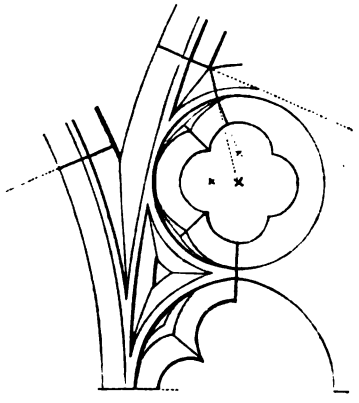

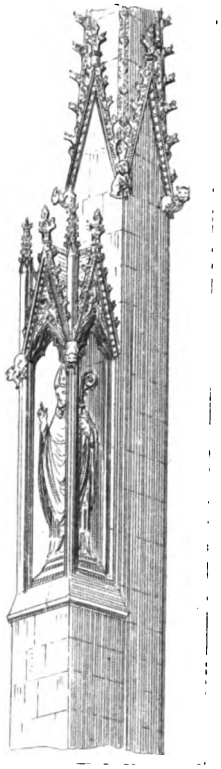

of stone tracery, the work must be devoid of the necessary strength. Any of the great circular or mullioned windows of the ancient cathedrals will fully illustrate this principle.

Images in these northern countries were, with some very few exceptions, placed in niches under canopies. This is really necessary to preserve the sculpture from the injuries of weather, and it is much more consistent than leaving the venerable image of a saintly or royal per-

Digitized by Google

sonage exposed to all the pelting of the pitiless storm. Detached images, surmounting buildings, are characteristic of southern and Italian architecture, and are much better suited to the climate of Milan than that of England.

Having now, I trust, successfully shown that the ornamental parts of pointed stone buildings are merely the decorations of their essential construction, and that the formations of mouldings and details are regulated by practical utility, I will endeavour to illustrate the same principles in ancient metal and wood-work.

ON METAL-WORK.

We now come to the consideration of works in metal; and I shall be able to show that the same principles of suiting the design to the material and decorating construction were strictly adhered to by the artists of the middle ages in all their productions in metal, whether precious or common.

In the first place, hinges, locks, bolts, nails, &c., which are always *concealed in modern designs*, were rendered in pointed architecture *rich and beautiful decorations;* and this not only in the doors and fittings of buildings, but in cabinets and small articles of furniture.

The early hinges covered the whole face of the doors with varied and flowing scroll-work. Of this description are those of Notre Dame at Paris, St. Elizabeth's church at Marburg, the western doors of Litchfield Cathedral, the Chapter House at York, and hundreds of other churches, both in England and on the continent. Plate III. figs. 1 and 3.

Hinges of this kind are not only beautiful in design, but they are *practically good.* We all know that on the principle of a lever a door may be easily torn off its modern hinges by a strain applied at its outward edge, (fig. 2.) This could not be the case with the ancient hinges, which extended the whole width of the door, and were bolted through in various

Digitized by Google

Digitized by Google

Digitized by Google

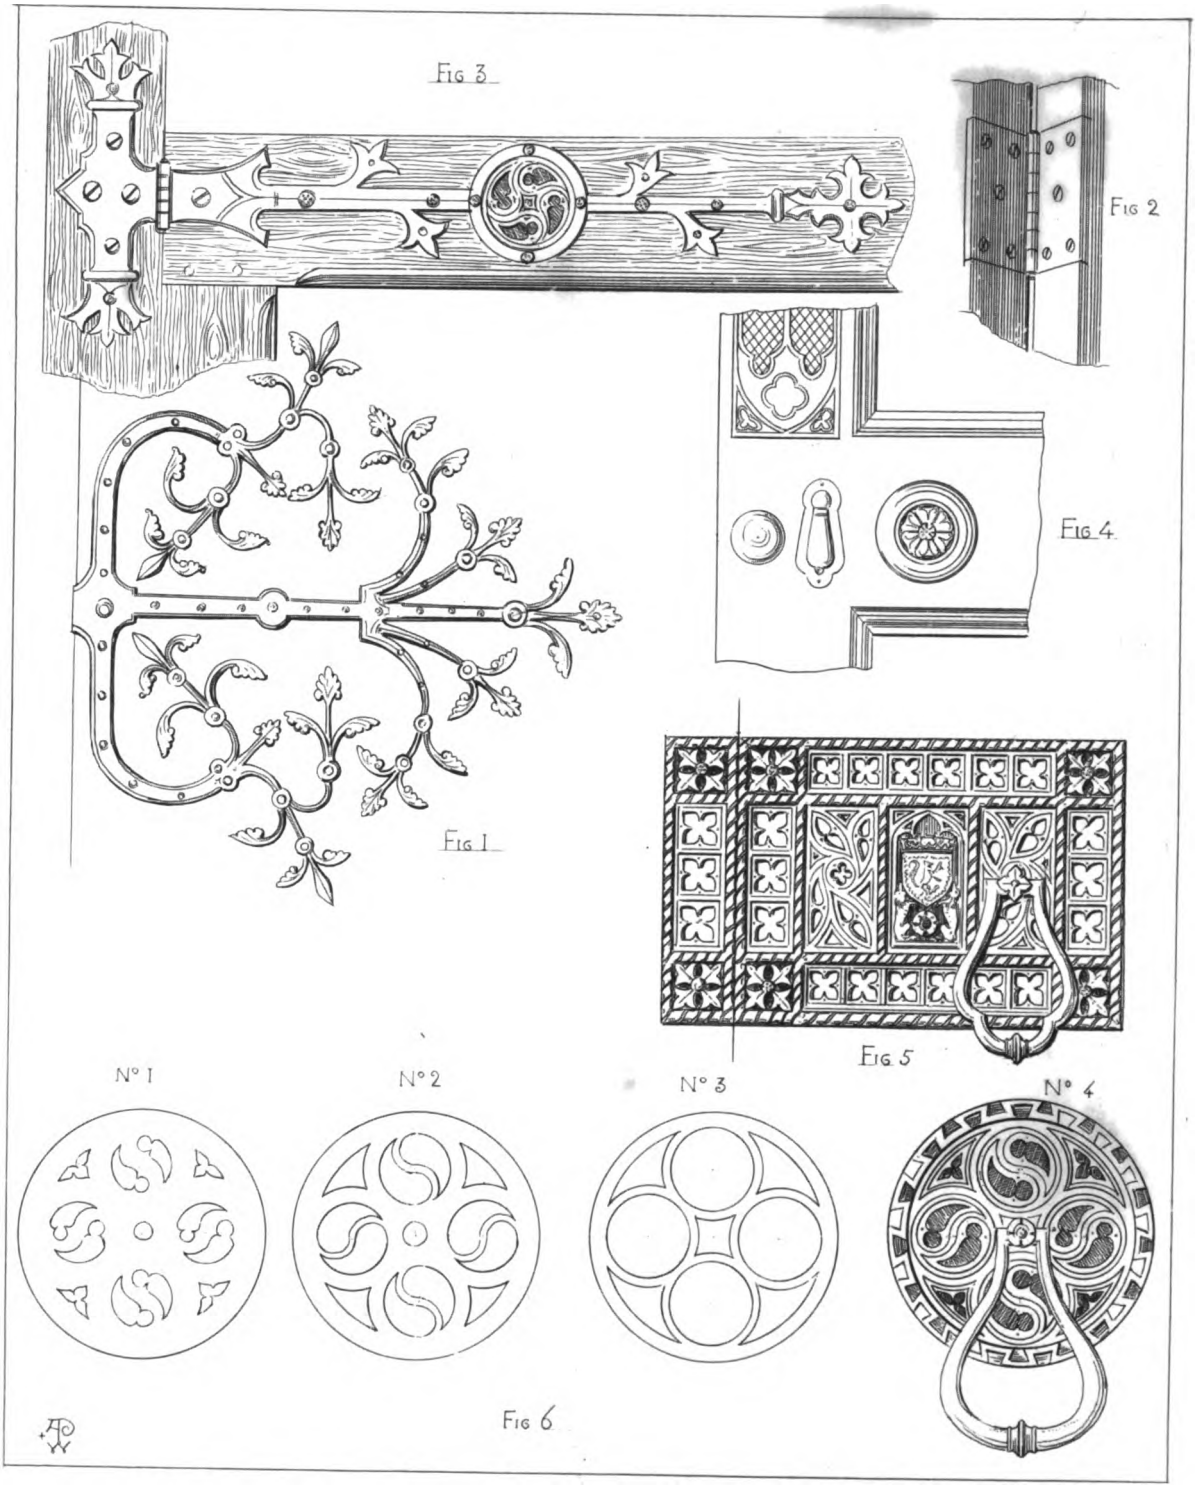

Plate III.

London Published by John Weale 59 High Holborn. 1841.

Digitized by Google

Digitized by Google

Digitized by Google

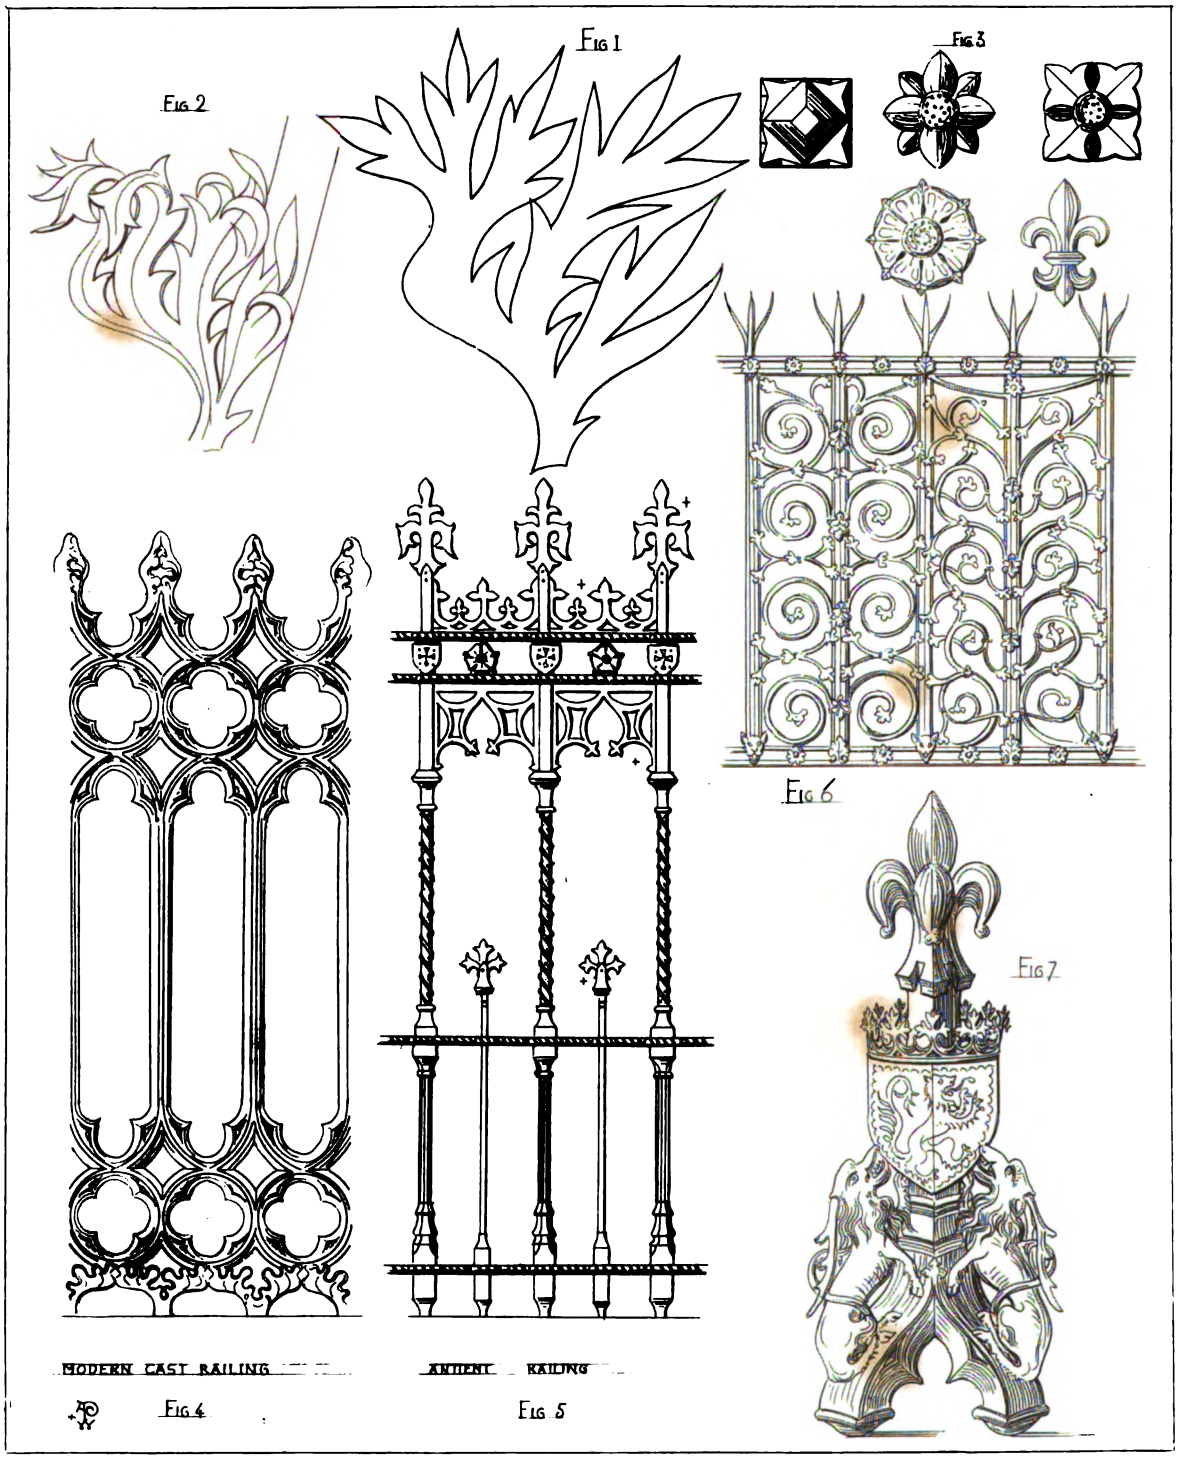

Plate IV.

London Published by J. [illegible] 59 High Holborn 1841.

Digitized by Google

Digitized by Google

Digitized by Google

places. In barn-doors and gates these hinges are still used, although devoid of any elegance of form; but they have been most religiously banished from public edifices as unsightly, merely on account of our present race of artists not exercising the same ingenuity as those of ancient times in rendering the *useful* a vehicle for the beautiful: the same remarks will apply to locks that are now concealed and let into the styles of doors, which are often more than half cut away to receive them. Plate III. fig. 4.

A lock was a subject on which the ancient smiths delighted to exercise the utmost resources of their art. The locks of chests were generally of a most elaborate and beautiful description. A splendid example of an old lock still remains at Beddington Manor House, Surrey, and is engraved in my father's work of Examples. In churches we not unfrequently find locks adorned with sacred subjects chased on them, with the most ingenious mechanical contrivances for concealing the key-hole. Keys were also highly ornamented with appropriate decorations referring to the locks to which they belonged; and even the wards turned into beautiful devices and initial letters. Fig. 5.

In all the ancient ornamental iron-work we may discern a peculiar manner of execution, admirably suited to the material, and quite distinct from that of stone or wood. For instance, tracery was produced by different thicknesses of pierced plates laid over each other. Fig. 6.

Leaves and crockets were not *carved* or *modelled*, and *then cast*, but cut out of thin metal plate, and twisted up with pliers (Plate IV. figs. 1, 2), and the lines of stems either engraved or soldered on. By these simple means all the lightness, ease, and sharpness of real vegetation is produced at a much less cost than the heavy flat foliage usually cast and chased up. It is likewise to be remarked, that the necessary fastenings for iron-work were always shown and ornamented. Bolts, nails, and rivets, so far from being unsightly, are beautiful studs and busy enrichments, if properly treated. Fig. 3.

Large tracery was either formed of round iron, like a stem twisted into

Digitized by Google

intersections, or of flat iron bars of different thicknesses riveted together, and the edges chamfered by filing.

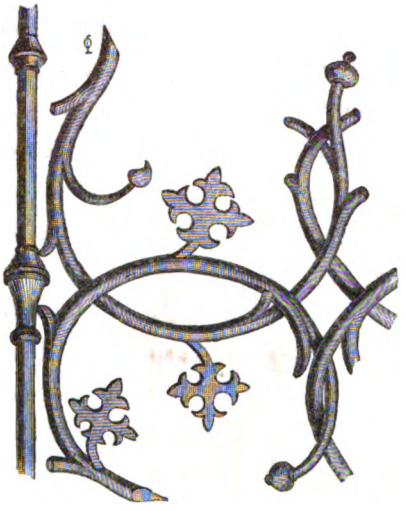

Well at Antwerp.

Railings were not *casts of meagre stone tracery* (Plate IV. fig. 4), but elegant combinations of metal bars, adjusted with due regard to strength and resistance. Fig. 5.*

There were many fine specimens of this style of railing round tombs, and Westminster Abbey was rich in such examples, but they were actually pulled down and sold for old iron by the order of the then Dean, and even the exquisite scroll-work belonging to the tomb of Queen Eleanor, of which I have here given a specimen (fig. 6), was not respected. The iron screen of King Edward the Fourth's tomb at St. George's Chapel, Windsor, is a splendid example of ancient iron-work.

The fire-dogs or Andirons (fig. 7), as they were called, which supported either the fuel-logs where wood was burnt, or grates for coal, were frequently of splendid design. The ornaments were generally heraldic, and

* The parts marked with a + in this figure are merely pierced out of *thin* plate, and riveted to the bars.

Digitized by Google

it was not unusual to work the finer parts in brass for relief of colour and richness of effect.

These form a striking contrast with the inconsistencies of modern grates, which are not unfrequently made to represent diminutive fronts of castellated or ecclesiastical buildings with turrets, loopholes, windows, and doorways, all in a space of forty inches.

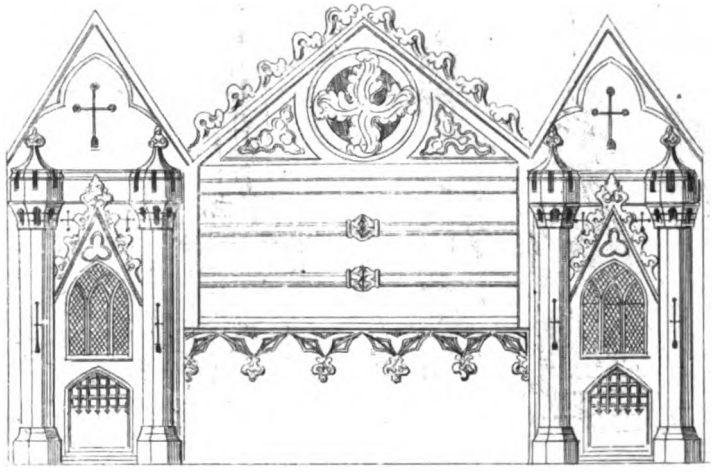

New Sheffield pattern for a modern Castellated Grate.

The fender is a sort of embattled parapet, with a lodge-gate at each end; the end of the poker is a sharp pointed finial; and at the summit of the tongs is a saint. It is impossible to enumerate half the absurdities of modern metal-workers; but all these proceed from the false notion of *disguising* instead of *beautifying* articles of utility. How many objects of ordinary use are rendered monstrous and ridiculous simply because the artist, instead of seeking the *most convenient form*, and *then decorating it*, has embodied some extravagance *to conceal the real purpose for which the article has been made!* If a clock is required, it is not unusual to cast a Roman warrior in a flying chariot, round one of the wheels of which, on close inspection, the hours may be descried; or the whole front of a cathedral church reduced to a few inches in height, with the clock-face

Digitized by Google

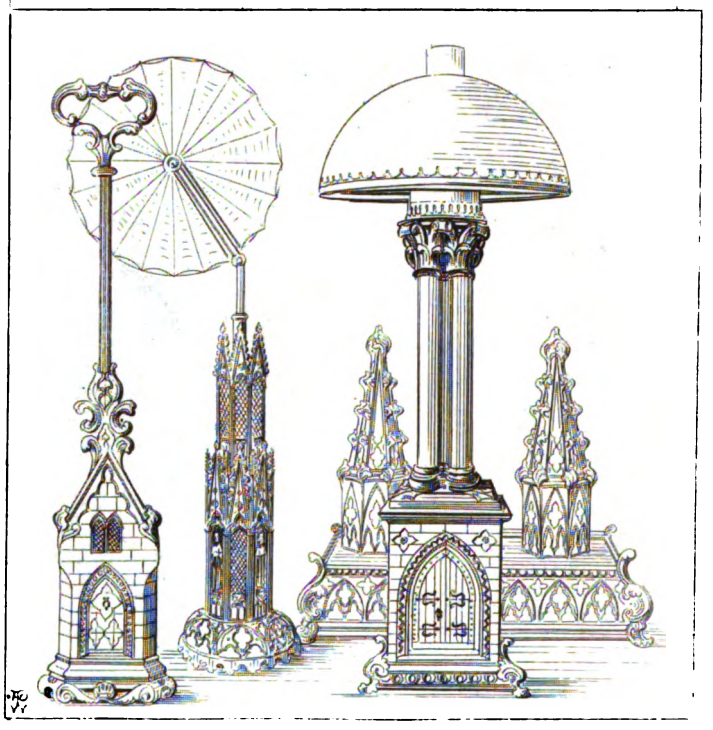

Patterns of Brumagem Gothic.

occupying the position of a magnificent rose window. Surely the inventor of this patent clock-case could never have reflected that according to the scale on which the edifice was reduced, his clock would be about two hundred feet in circumference, and that such a monster of a dial would crush the proportions of almost any building that could be raised. But this is nothing when compared to what we see continually produced from those inexhaustible mines of bad taste, Birmingham and Sheffield: staircase turrets for inkstands, monumental crosses for light-shades, gable ends hung on handles for door-porters, and four doorways and a cluster of pillars to support a French lamp; while a pair of *pinnacles* supporting an arch is called a Gothic-pattern scraper, and a wiry compound of quatrefoils and fan tracery an abbey garden-seat. Neither relative scale, form, purpose, nor unity of style, is ever considered by those who design these

Digitized by Google

abominations; if they only introduce a quatrefoil or an acute arch, be the outline and style of the article ever so modern and debased, it is at once denominated and sold as Gothic.

While I am on this topic it may not be amiss to mention some other absurdities which may not be out of place, although they do not belong to metal-work. I will commence with what are termed Gothic-pattern papers, for hanging walls, where a wretched caricature of a pointed building is repeated from the skirting to the cornice in glorious confusion,—door over pinnacle, and pinnacle over door. This is a great favourite with hotel and tavern keepers. Again, those papers which are shaded are defective in principle; for, as a paper is hung round a room, the ornament must frequently be shadowed on the light side.

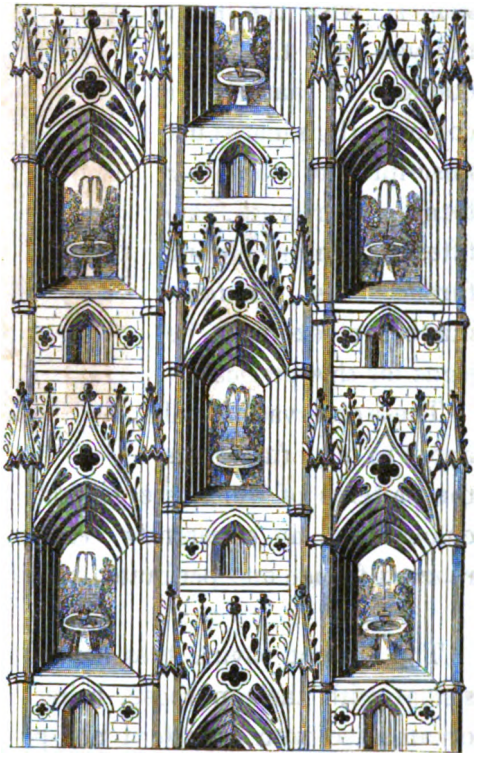

Pattern of Modern Gothic Paper.

The variety of these miserable patterns is quite surprising; and as the expense of cutting a block for a bad figure is equal if not greater than for a good one, there is not the shadow of an excuse for their continual reproduction. A moment's reflection must show the extreme absurdity of *repeating a perspective* over a large surface with some hundred different points of sight: a panel or wall may be enriched and decorated at pleasure, but it should always be treated in a consistent manner.

Digitized by Google

Flock papers are admirable substitutes for the ancient hangings, but then they must consist of a pattern *without shadow*, with the forms relieved by the introduction of harmonious colours. Illuminated manuscripts of the thirteenth, fourteenth, and fifteenth centuries would furnish an immense number of exquisite designs for this purpose.

Ancient Pattern for a Flock Paper.

These observations will apply to modern carpets, the patterns of which are generally *shaded*. Nothing can be more ridiculous than an apparently *reversed groining* to walk upon, or highly relieved foliage and perforated tracery for the decoration of a floor.

The ancient paving tiles are quite consistent with their purpose, being merely ornamented with a pattern not produced by any apparent relief, but only by *contrast of colour;* and carpets should be treated in precisely the same manner. Turkey carpets, which are by far the handsomest now manufactured, have no shadow in their pattern, but merely an intricate combination of coloured intersections.

Pattern of Ancient Paving Tiles.

Digitized by Google

Digitized by Google

Digitized by Google

Modern upholstery, again, is made a surprising vehicle for bad and paltry taste, especially when any thing very fine is attempted.

To arrange curtains consistently with true taste, their use and intention should always be considered: they are suspended across windows and other openings to exclude cold and wind, and as they are not always required to be drawn, they are hung to rings sliding on rods, to be opened or closed at pleasure: as there must necessarily be a space between this rod and the ceiling through which wind will pass, a boxing of wood has been contrived, in front of which a valance is suspended to exclude air.

ANTIENT CURTAIN HANGINGS

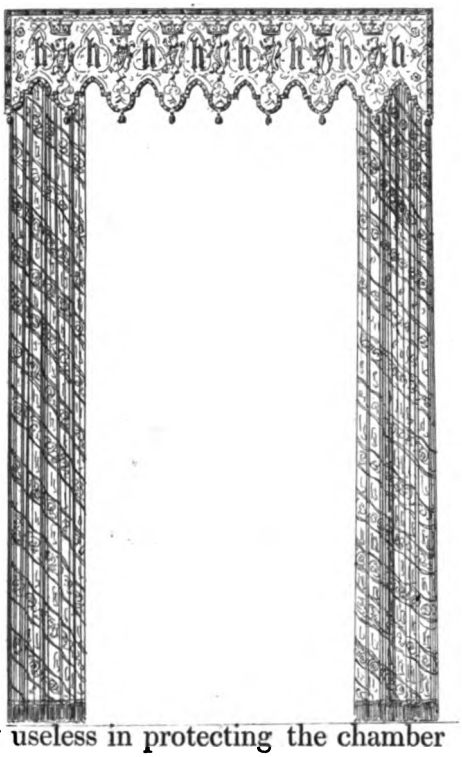

Now the materials of these curtains may be rich or plain, they may be heavily or lightly fringed, they may be embroidered with heraldic charges or not, according to the locality where they are to be hung, but their real use must be strictly maintained. Hence all the modern plans of suspending enormous folds of stuff over poles, as if for the purpose of sale or of being dried, is quite contrary to the use and intentions of curtains, and abominable in taste; and the only object that these endless festoons and bunchy tassels can answer is to swell the bills and profits of the upholsterers, who are the inventors of these extravagant and ugly draperies, which are not only useless in protecting the chamber from cold, but are the depositories of thick layers of dust, and in London not unfrequently become the strong-holds of vermin.

It is not less ridiculous to see canopies of tomb and altar screens set up

Digitized by Google

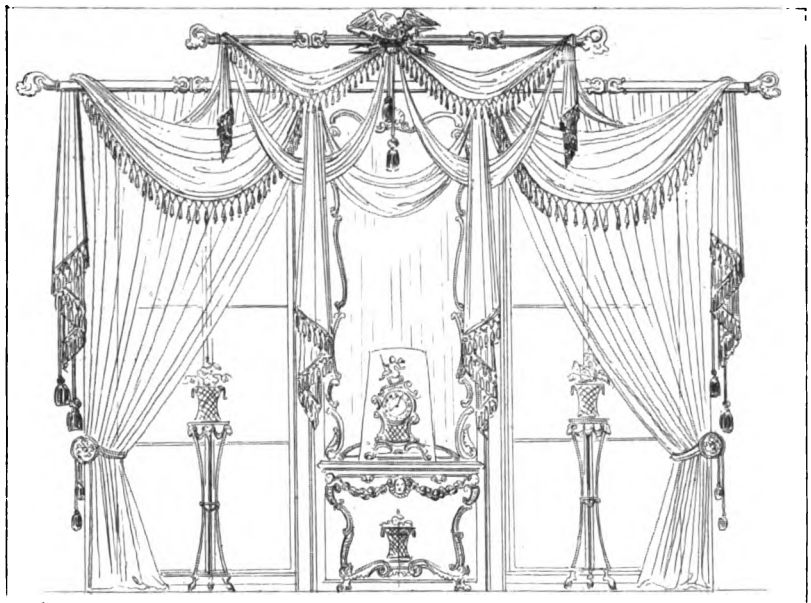

MODERN UPHOLSTERY

over windows, instead of the appropriate valance or baldaquin of the olden time. It is proper in this place to explain the origin and proper application of fringe, which is but little understood. Fringe was originally nothing more than the ragged edge of the stuff, tied into bunches to prevent it unravelling further. This suggested the idea of manufacturing fringe as an ornamental edging, but good taste requires that it should be both *designed and applied consistently*.

In the first place, fringe should never consist of *heavy parts*, but simply of threads tied into ornamental patterns.



Modern Fringe, composed of turned *pieces of wood*.



Ancient Fringe, composed of threads.

Digitized by Google

Secondly, a deep fringe should not be suspended to a narrow valance.

Thirdly, no valance should be formed entirely of fringe, as fringe can only be applied as an ornamental edging to some kind of stuff.



A Modern Valance of Fringe.

Fourthly, fringe should not be sewed *upon* stuff, but always *on the edges*. It is allowable at the very top, as it may be supposed to be the upper edge turned over.

But to return to metal-work. We have in the next place to consider the use of cast-iron. When viewed with reference to mechanical purposes, it must be considered as a most valuable invention, but it can but rarely be applied to ornamental purposes.

Iron is so much stronger a material than stone that it requires, of course, a much smaller substance to attain equal strength; hence, to be consistent, the mullions of cast-iron tracery must be so reduced as to look painfully thin, devoid of shadow, and out of all proportion to the openings in which they are fixed. If, to overcome these objections, the castings are made of the same dimensions as stone, a great inconsistency with respect to the material is incurred; and, what will be a much more powerful argument with most people, treble the cost of the usual material.

Moreover, all castings must be deficient of that play of light and shade consequent on bold relief and deep sinkings, so essential to produce a good effect.

Cast-iron is likewise a source of continual repetition, subversive of the variety and imagination exhibited in pointed design. A mould for casting is an expensive thing; once got, it must be worked out. Hence we see the same window in green-house, gate-house, church, and room; the same strawberry-leaf, sometimes perpendicular, sometimes

Cast-iron Mullion.



Stone Mullion.

Digitized by Google

horizontal, sometimes suspended, sometimes on end; although by the principles of pure design these various positions require to be differently treated.

Cast-iron is a deception; it is seldom or never left as iron. It is disguised by paint, either as stone, wood, or marble. This is a mere trick, and the severity of Christian or Pointed Architecture is utterly opposed to all deception: better is it to do a little substantially and consistently with truth than to produce a great but false show. Cheap deceptions of magnificence encourage persons to assume a semblance of decoration far beyond either their means or their station, and it is to this cause we may assign all that mockery of splendour which pervades even the dwellings of the lower classes of society. Glaring, showy, and meretricious ornament was never so much in vogue as at present; it disgraces every branch of our art and manufactures, and the correction of it should be an earnest consideration with every person who desires to see the real principles of art restored.

I will now briefly notice the exquisite productions of the ancient gold and silversmiths. As reformers and puritans have left us nothing but the mere name of the glorious shrines and ornaments which formerly enriched our cathedral and other churches, and as revolutionary and heretical violence has been almost equally destructive on the continent, were it not for a few places which have preserved their ancient treasures, we should be unable to conceive half the art, half the talent, half the exquisite beauties of this class of ecclesiastical ornaments. In the sacristry of Aix-la-Chapelle is a treasury of inestimable value, consisting of shrines, reliquaries, crosses, crowns, ampuls, chalices, pyxes, books of the Holy Gospels, paxes, and enamelled images of silver, all executed during the finest periods of Christian art, the richness of their material being only surpassed by that of their design. To enumerate even a tenth part of these wonderful productions of the goldsmith's art would occupy far too much time for my present purpose; but I will make a few remarks respecting them to illustrate the purpose of my Lecture.

Digitized by Google

Their construction and execution is decidedly of a *metallic character*. The ornament is produced by *piercing, chasing, engraving, and enamel:* many of the parts were first formed in thin plates of metal, and then shaped by the pliers. Engraving is a style of ornament peculiar to metal. The old goldsmiths were undoubtedly the inventors of our present engraved plates for printing. They increased the effect of the ornamental engravings, by hollowing out the ground in certain parts, and filling it in with coloured enamels. The annexed engraving of an ancient pyx will show the style of

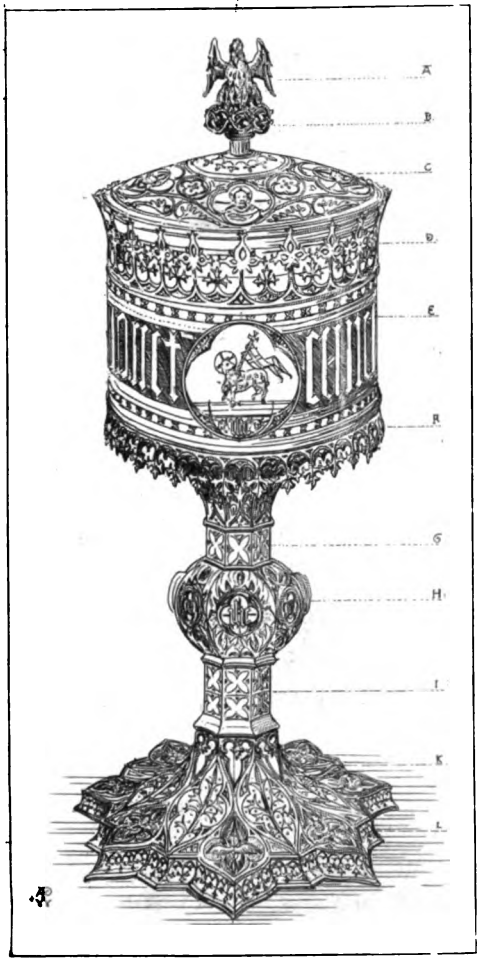

A The Pelican, chased.

B The nest, composed of twisted silver wire.

C Engraved and enamelled.

D Pierced and engraved.

E Engraved, and the centre enamelled.

F Pierced and engraved.

G Quatrefoils enamelled.

H Knop beat up with enamelled quatrefoils.

I Quatrefoils enamelled.

K Foot hammered up, then engraved and enamelled.

L Engraved.

Digitized by Google

working silver, as practised during the middle ages. There are some exquisite examples of chalice feet enamelled with sacred subjects in the sacristry of Mayence Cathedral, and a circular reliquary at Aix, which Dr. Rock considers to have been used as a pax, which is a transcendant specimen of the art of enamel. The covers of the great books of the Holy Gospels were enriched with chasing, enamels, and even jewels; the crucifixion of our Lord in the centre, and the emblems of the Evangelists at the corners of an elaborate border. Precious stones of every description were studded on these ornaments, which presented a wonderful combination of richness and beauty, produced by gold enamel of various hues and sparkling gems, arranged with the purest design and most harmonious effect. As it would occupy a whole work to illustrate these objects separately, I have endeavoured to convey some idea of their beauty by the annexed engraving of a reliquary chamber. Plate V.*

These treasures, which Aix now alone possesses, were by no means superior to many of those splendid ecclesiastical ornaments formerly to be found in all the large churches of this land, but which fell a prey to the rapacious tyrant Henry and his abettors, in the general wreck of faith and art at the period of his lamentable schism.

Silversmiths are no longer artists; they manufacture fiddle-headed spoons, punchy racing cups, cumbersome tureens and wine-coolers; their vulgar salvers are covered with sprawling rococo, edged with a confused pattern of such universal use that it may be called with propriety the *Sheffield eternal.* Cruet-stand, tea-pot, candlestick, butter-boat, tray, waiter, tea-urn, are all bordered with this in and out shell-and-leaf pattern, which, being struck in a die, does not even possess the merit

* References to Plate V.—i. Ferettum or portable shrine. ii., ii. Books of the Holy Gospels. iii. Relics in a silver bust. iv. Reliquaries. v. Relic of the holy cross. vi. Paxes for the kiss of peace during the mass. vii. Morse for fastening a cope. viii. Head of a processional cross. ix. Precious mitres. x. Pastoral staff. xi. Cantor's staff. xii. Images of silver gilt.

Digitized by Google

Digitized by Google

Digitized by Google

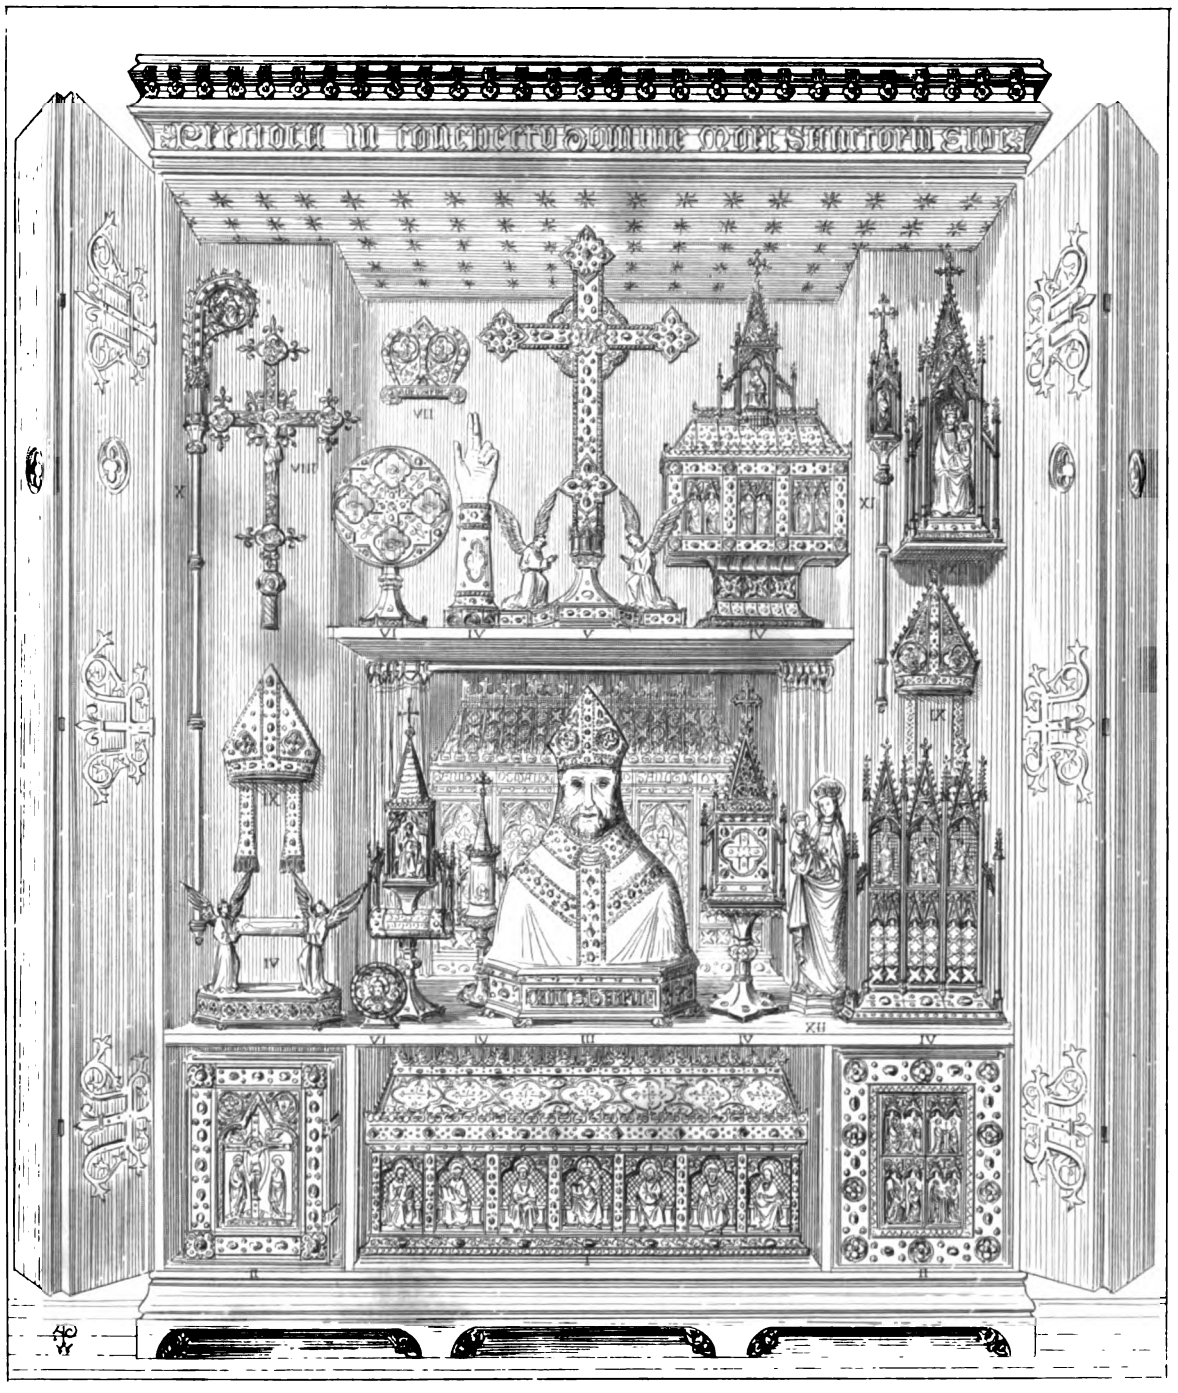

ALMERY IN A RELIQUARY CHAMBER

Plate V

London Published by John Weale 59 High Holborn 1841

Digitized by Google

Digitized by Google

of relief. Like every thing else, silver-work has sunk to a mere trade, and art is rigidly excluded from its arrangements.

Iron-smiths were artists formerly, and great artists too; Quentin Matys, for instance, whose beautiful well-top stands in front of Antwerp Cathedral, and whose splendid picture of the entombment of our Lord is the greatest ornament of the Musée of that city. Quentin Matys are not, however, of our generation; if you want some objects executed in iron rather different from what are in ordinary use, and go to a smith to whom you explain your wishes and intentions, the vacant stare of the miserable mechanic soon convinces you that the turning up of a horse-shoe is the extent of his knowledge in the mysteries of the smithy: you then address yourself to another, and one who is called a *capital hand;* and if he be sufficiently sober to comprehend your meaning, he will tell you that what you want is quite out of his line, that he only makes a particular sort of lock, and that he does not think there is a man in the trade who could undertake the job, which, after all, is perhaps a mere copy of a very ordinary piece of old iron-work; and this is a true picture of the majority of our artizans in the nineteenth century, the enlightened age of mechanics' institutes and scientific societies.

Mechanics' institutes are a mere device of the day to poison the minds of the operatives with infidel and radical doctrines; the Church is the true mechanics' institute, the oldest and the best. *She was the great and never failing school in which all the great artists of the days of faith were formed.* Under her guidance they directed the most wonderful efforts of her skill to the glory of God; and let our fervent prayer ever be, that the Church may again, as in days of old, cultivate the talents of her children to the advancement of religion and the welfare of their own souls;—for without such results talents are vain, and the greatest efforts of art sink to the level of an abomination.

Digitized by Google

LECTURE II.

We will now proceed to consider decoration with regard to constructions in wood, which are founded on quite opposite principles to those of stone. With timber you may attain a great height, or extend over a great breadth, by means of a single spar reared on its base or supported at the ends. The strength of wood-work is attained by bracing the various pieces together on geometrical principles. This is beautifully exemplified in ancient roofs, either of churches or domestic buildings: the construction of these, so far from being concealed, is turned into ornament. The principal tie-beams, rafters, purloins, and braces, which in modern edifices are hidden at a vast expense by a flat plaster ceiling, are here rendered very ornamental features, and this essential portion of a building becomes its greatest beauty. Plate VI. figs. 1 and 2.

The stupendous roof of Westminster Hall, decidedly the grandest in the world, illustrates this principle fully, and so do all the roofs in the collegiate halls of Oxford and Cambridge, as well as those of the palatial edifices at Eltham, Hampton Court, Croydon, and many others belonging to manorial residences.

Of wooden roofs over churches we have beautiful specimens in various parts of England, but especially in Lincolnshire, Norfolk, and Suffolk. The beams of these roofs are beautifully moulded and enriched with carvings. Figs. 3, 4.

Nor were these carvings without a mystical and appropriate meaning; they usually represented angels, archangels, and various orders of the heavenly hierarchy, hovering over the congregated faithful, while the spaces between the rafters were painted azure and powdered with stars and other celestial emblems, a beautiful figure of the firmament. Some of these angels held shields charged with the instruments of the passion, the holy name, and other emblems; others labels with devout scriptures. Every portion of these roofs was enriched with painting, and when in their glory must have formed splendid canopies to the temples of the

Digitized by Google

ANTIENT ROOF WITH THE FRAMING MADE ORNAMENTAL FIG 1

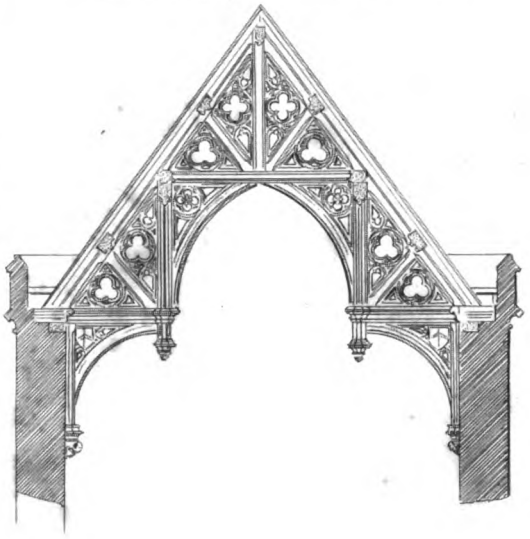

MODERN ROOF WITH THE FRAMING CONCEALD BY A PLASTERED CEILING FIG 2

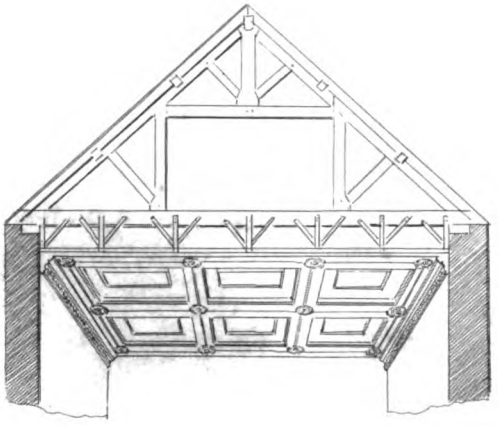

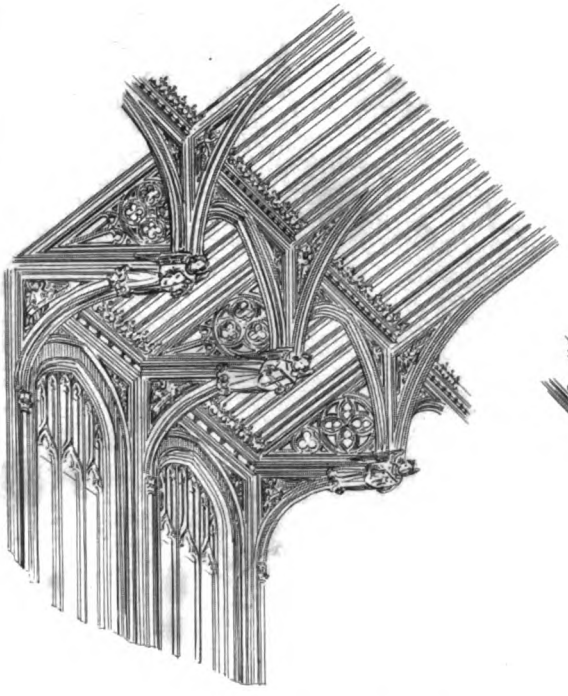

BLAKENEY CHURCH NORFOLK FIG 3

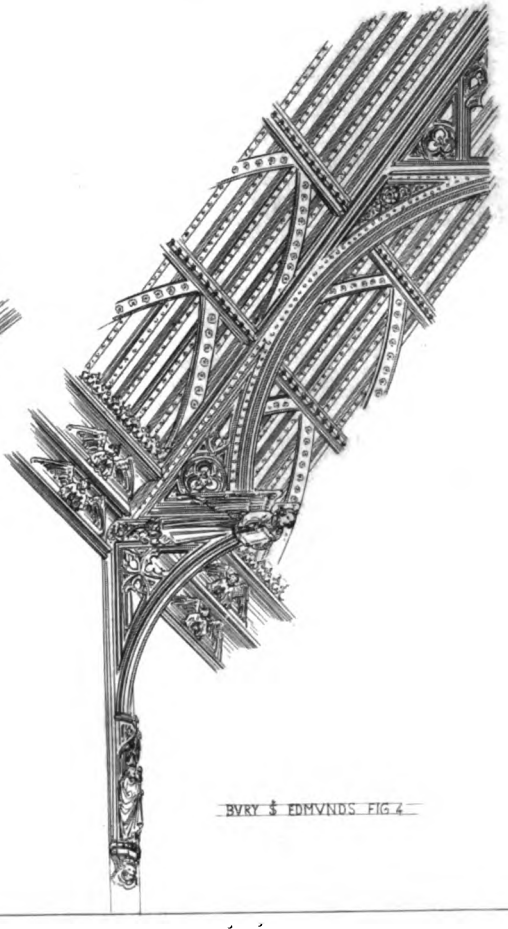

BURY S EDMUNDS FIG 4

Plate VI

London Published by John Weale, 59 High Holborn 1841.

Digitized by Google

Digitized by Google

living God; and what is peculiarly useful to illustrate my present purpose, these roofs were of an entirely different construction to coverings of stone. *Wooden groining* is decidedly bad, because it is employing a material *in the place and after the manner of stone, which requires an entirely different mode of construction.*

I am aware that ancient examples of wooden groining are to be found in the cloisters of Lincoln Cathedral, Selby Church, and some others; but in these cases, as well as any others in which it may be found, an inspection of the building will clearly show that they were originally intended to have been groined with stone, and that the springing ribs have been carried up some height in that material, but that owing to a real or supposed weakness in the side walls, which were not considered capable of resisting the lateral pressure of stone vaulting, the expedient of an imitation groining in wood was resorted to as a case of absolute necessity; and I am decidedly of opinion that had not the original intention been to have groined these churches in stone, their builders would have made an entirely different arrangement in their upper parts, suitable to an ornamental wooden roof.

At Bury St. Edmund's is a glorious roof, of which I have given a sketch. At every pair of principals are two angels as large as the human figure, bearing the sacred vessels and ornaments used in the celebration of the holy sacrifice; these angels are vested in chasubles and dalmaticks, tunicles and copes, of ancient and beautiful form; the candlesticks, thurible, chalice, books, cruets, &c., which they bear are most valuable authorities for the form and design of those used in our ancient churches. The roofs of St. Peter's and All Saints, in that truly catholic city of Norwich, are very fine; and in Lavenham and Long Melford churches, in Suffolk, are admirable specimens of carved timber roofs.[4]

But, alas! how many equally fine roofs have been demolished and burnt by the brutal ignorance of parish functionaries!—how many have

[4] In the last number of the British Critic is a most admirable article on open roofs, well worthy the perusal of all who are interested in the revival of ancient ecclesiastical architecture.

Digitized by Google

been daubed over by the remorseless whitewasher!—how many painted in vile imitation of marble, as at Yarmouth, (especially if the churchwarden for the time being happened to be a *grainer!*)—how many of these fine roofs have been spoiled of their beautiful and appropriate decorations by the execrable fanaticism of the puritan faction, who actually have made entries in the parish accounts of the cost of their demolition!—how many concealed from view by lath and plaster ceilings of miserable design tacked up under them!—and although a somewhat better spirit has at length arisen, still how many of these beautiful memorials of the piety and skill of our ancestors are yet being mutilated or utterly destroyed under the pretext of reparation!—a plea which is not unfrequently urged by those in authority for selling the lead and massive oak beams, the solid

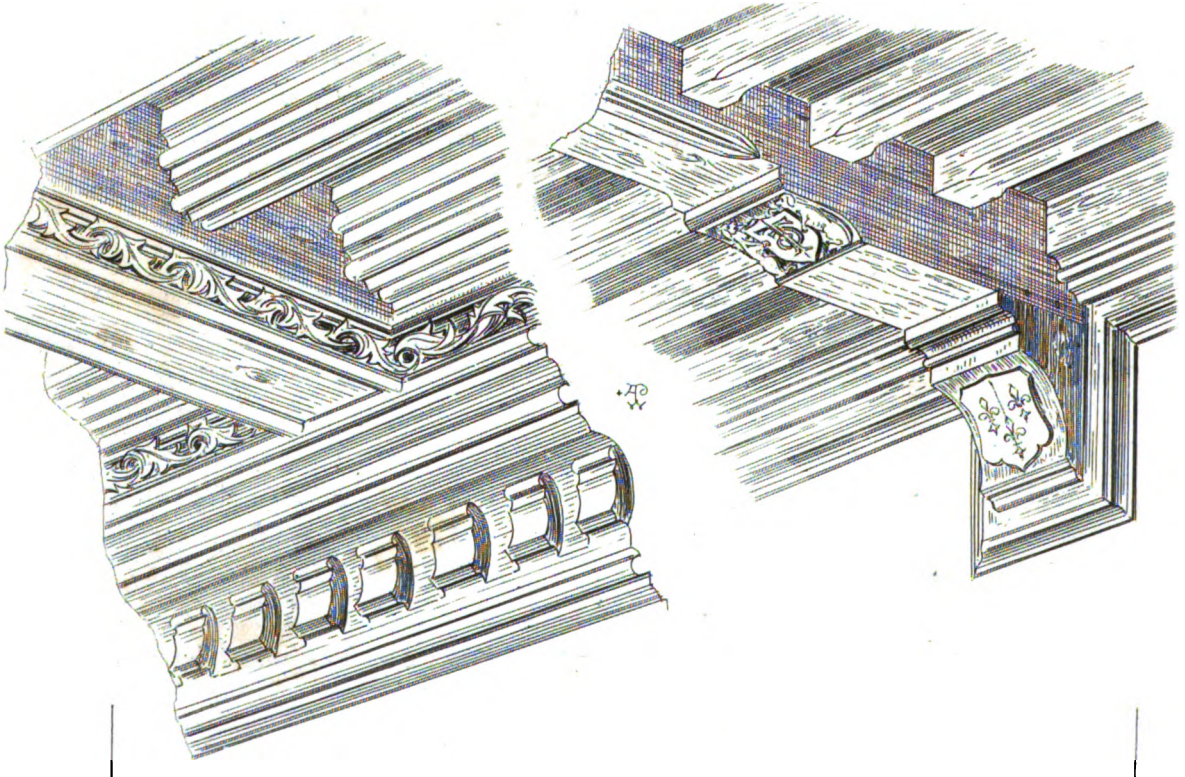

Ceiling of an old house at Long Melford. Ceiling of an old house at Antwerp.

Digitized by Google

covering of antiquity, and substituting a plastered ceiling and meagre slates in their stead, which detestable practice is still in full force in many parts of England.

Not only do we find the construction of roofs ornamented, but there are numerous examples of common joist floors and the carrying beams which are rendered exceedingly beautiful by moulding and carving.

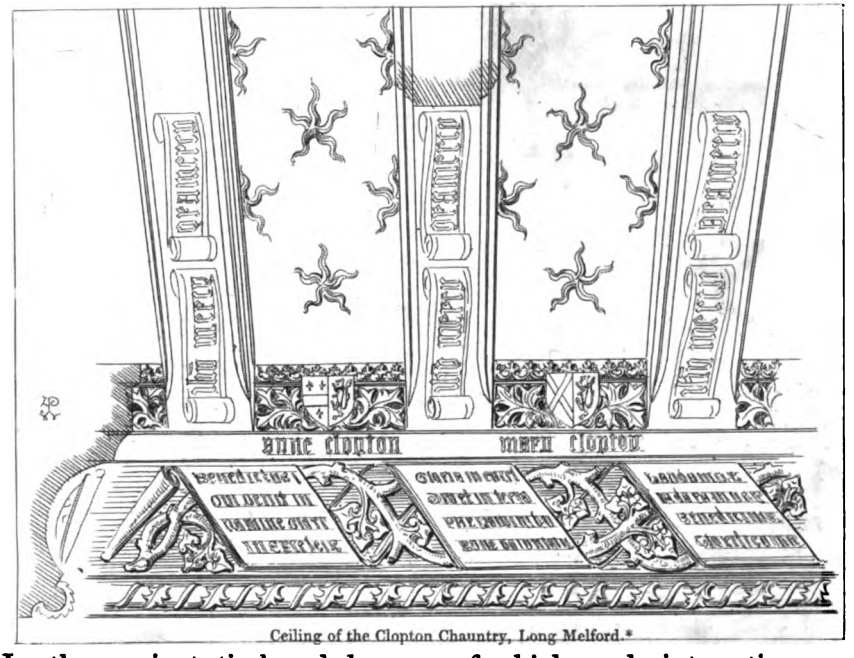

Ceiling of the Clopton Chauntry, Long Melford.*

In the ancient timbered houses of which such interesting examples yet remain in many of our old cities, especially at Coventry, York, and Gloucester, we do not *find a single feature introduced beyond the decoration of what was necessary for their substantial construction.* What can be stronger, and at the same time more ornamental, than the curvilineal bracing by which due advantage was taken of crooked pieces of timber!—

* The ground of this ceiling is azure; the stars are of lead, gilt; the inscription on the rafters is Jhu Mercy, and Gramercy; the arms on the shields are those belonging to different branches of the Clopton family, with their names inscribed beneath. The scripture on the large scroll is extracted from the Psalter, the whole richly painted.

Digitized by Google

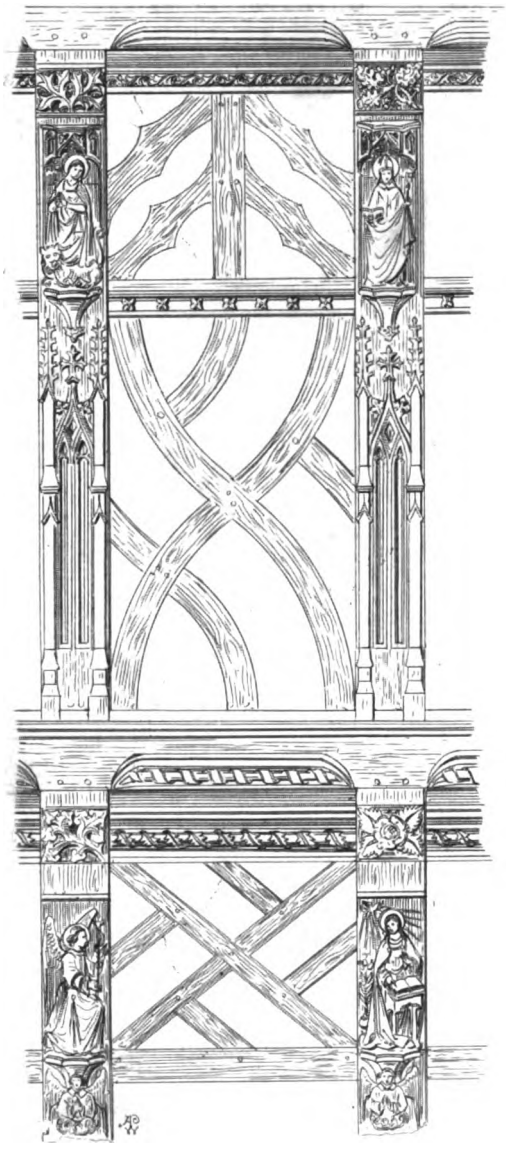

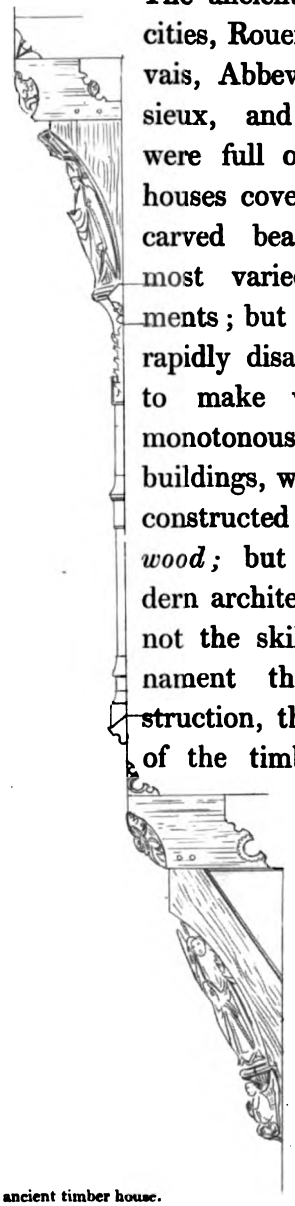

The ancient French cities, Rouen, Beauvais, Abbeville, Lisieux, and others, were full of timber houses covered with carved beams and most varied ornaments; but these are rapidly disappearing to make way for monotonous plaster buildings, which are constructed also of *wood;* but as modern architects have not the skill to ornament that construction, the whole of the timbers are

Example of *ornamented construction* in an ancient timber house.

concealed by mock cornices and pilasters, so that the houses of modern

Digitized by Google

Digitized by Google

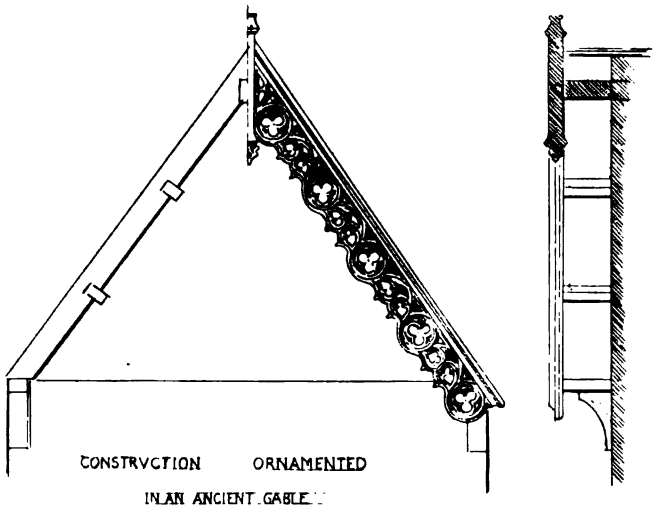

CONSTRVCTION ORNAMENTED

IN AN ANCIENT GABLE.

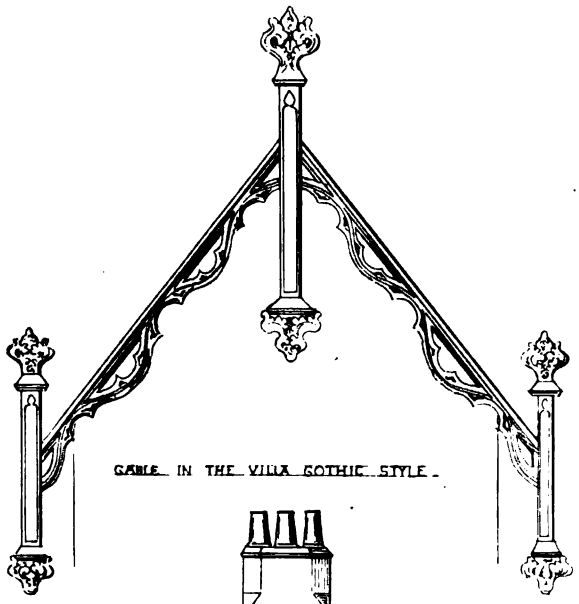

GABLE IN THE VILLA GOTHIC STYLE.

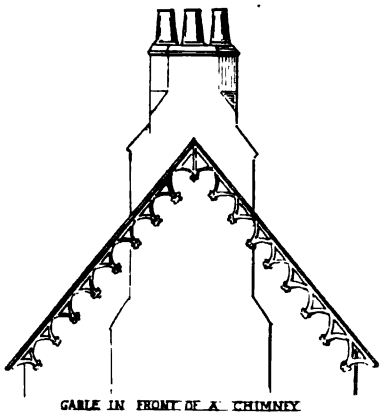

GABLE IN FRONT OF A CHIMNEY

Plate VII

UofM

Digitized by Google

Digitized by Google

Digitized by Google

Rouen have all the disadvantages of the old wooden buildings, without one particle of their beauty.

As gable-ends form most prominent features of the old buildings, and as they are continually attempted by modern Gothic builders, I will draw your attention to their real use, and then point out some of the egregious blunders frequently committed by modern architects when they attempt to introduce them.

The barge boards of gables are intended to cover and preserve the ends of the purloins which projected over to shelter the front of the building.

The hip knop which terminated the ancient gables was in reality a king post fixed at the junction of the barge boards, and into which they were tenanted. To the upper part of these was usually affixed a vane, and the bottom was finished off in the form of a pendant. Plate VII.

In modern gable ends the barge boards are generally so *slight and cut so open* that they become mere skeletons, and utterly useless for the purpose for which they should be fixed, that of covering the timber ends. Again, the knop really useful at the apex of the gable is repeated in modern gables at the extremities, hanging down to an extravagant depth, and loaded with bunchy finials and pendants. Pl. VII.

Of these we may say with Puff in the Critic, when he hears the three morning guns, "Give these fellows a good idea, and they will work it to death." A king post in the centre of the gable is good, because it is really useful, but at the lower extremities these excrescences cannot serve any purpose except to add useless weight and unnecessary expense.

It is a common practice, when a chimney shaft is carried up in the centre of a gable end, for the barge boards *to be fixed before it*. This is absurd; flues must necessarily stop the passage of timbers; consequently the barge boards, which are only coverings of those timbers, should stop also. Pl. VII.

Digitized by Google

If we examine the ancient wood-work which decorated rooms, we shall find that it consisted of mere panelling, more or less enriched by carving, with large spaces left for hangings and tapestry. Plate VIII.

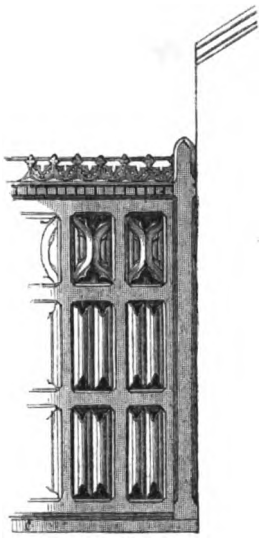

Were the real principles of Gothic architecture restored, the present objection of its extreme costliness would cease to exist. In pointed decoration *too much* is generally attempted; every room in what is called a Gothic house must be fitted with niches, pinnacles, groining, tracery, and tabernacle work, after the manner of a chantry chapel. Such fittings must be enormously expensive, and at the same time they are contrary to the true spirit of the style, which does not admit of the introduction of these features in any situation but that to which they properly belong. The modern admirers of the pointed style have done much injury to its revival by the erroneous and costly system they have pursued: the interiors of their houses are one mass of elaborate work; there is no repose, no solidity, no space left for hangings or simple panels: the whole is covered with trifling details, enormously expensive, and at the same time subversive of good effect. These observations apply equally to furniture;—upholsterers seem to think that nothing can be Gothic unless it is found in some church. Hence your modern man designs a sofa or occasional table from details culled out of Britton's Cathedrals, and all the ordinary articles of furniture, which require to be simple and convenient, are made not only very expensive but very uneasy. We find diminutive flying buttresses about an arm-chair; every thing is crocketed with angular projections, innumerable mitres, sharp ornaments, and turreted extremities. A man who remains any length of time in a modern Gothic room, and escapes without being wounded by some of its minutiæ, may consider himself extremely fortunate. There are often as many pinnacles and gablets about a pier-

Digitized by Google

U of M

Digitized by Google

Digitized by Google

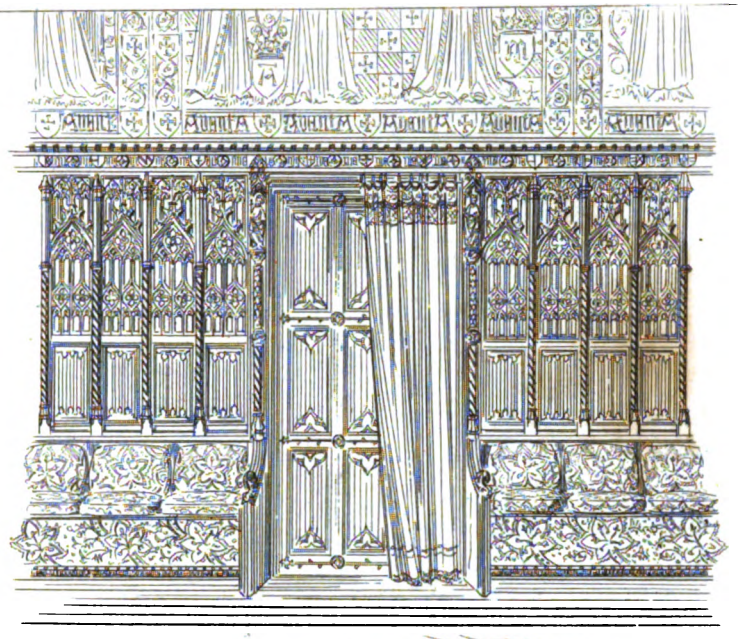

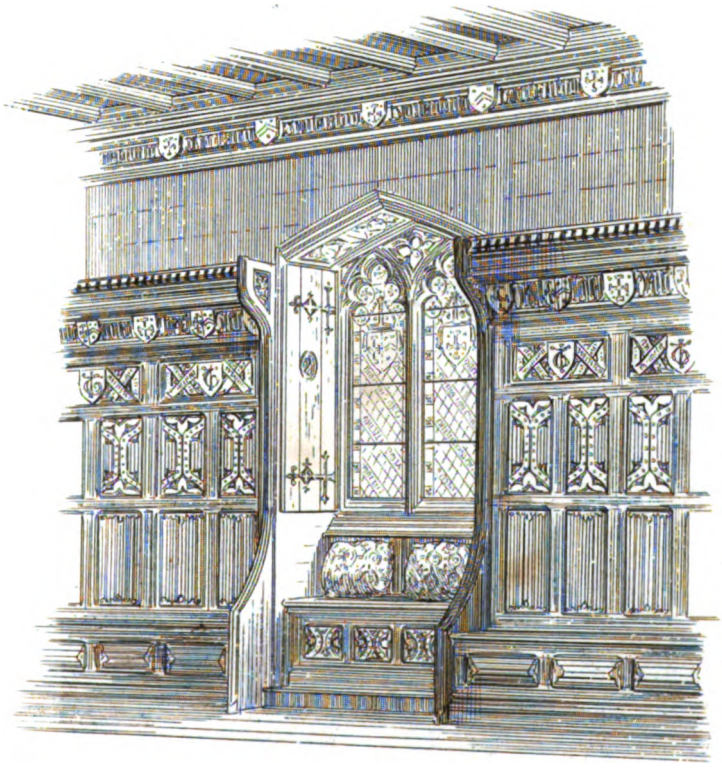

Plate VIII

London Published by John Weale, 59 High Holborn 1841

Digitized by Google

Digitized by Google

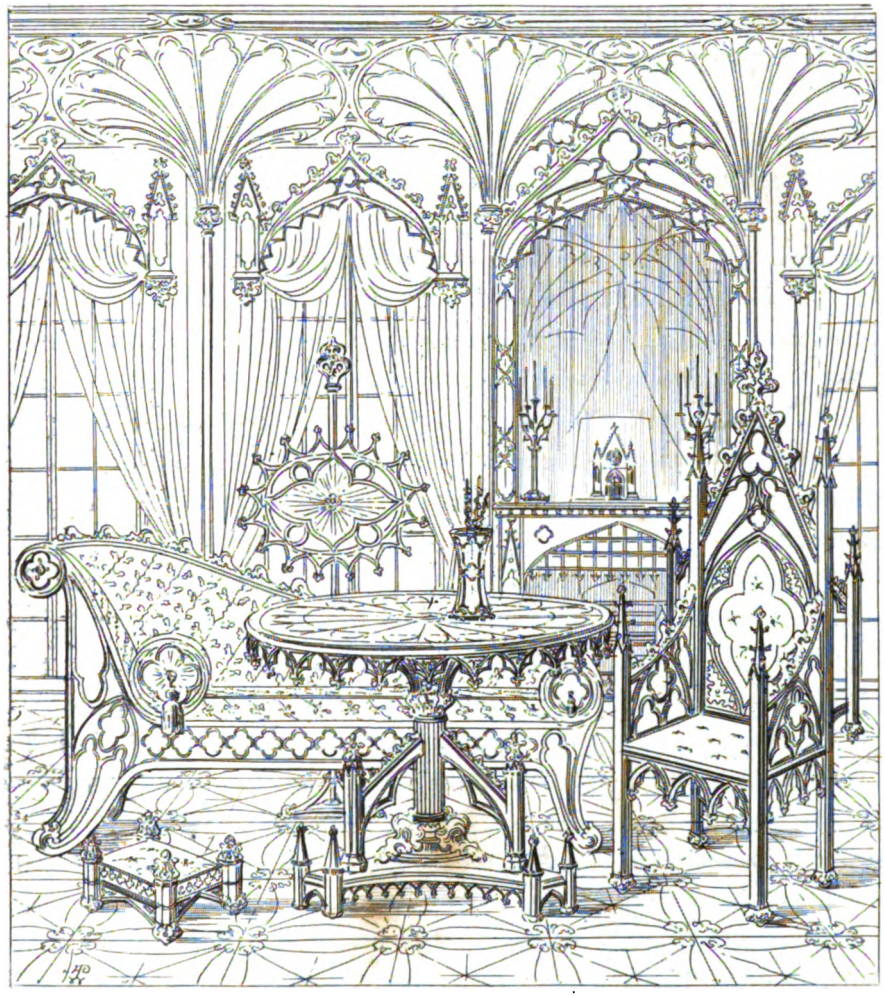

Illustration of the extravagant style of Modern Gothic Furniture and Decoration.

glass frame as are to be found in an ordinary church, and not unfrequently the whole canopy of a tomb has been transferred for the purpose, as at Strawberry Hill. I have perpetrated many of these enormities in the furniture I designed some years ago for Windsor Castle. At that time I had not the least idea of the principles I am now explaining; all my knowledge of Pointed Architecture was confined to a tolerably good

Digitized by Google

notion of details in the abstract; but these I employed with so little judgment or propriety, that, although the parts were correct and exceedingly well executed, collectively they appeared a complete burlesque of pointed design.

I now come, in the last place, to consider decoration with reference to propriety; what I mean by propriety is this, *that the external and internal appearance of an edifice should be illustrative of, and in accordance with, the purpose for which it is destined.* There is a vast difference between a building raised to God and one for temporal purposes; again, in the first of these a great distinction necessarily exists between a cathedral and a parochial church, between a collegiate chapel and a private oratory; and in the second, between a royal residence and a manorial mansion,—between monuments raised for public or national purposes and erections for private convenience.

The scale of propriety in architecture must always be regulated by purpose, and to illustrate this more fully I will divide edifices under three heads,—Ecclesiastical, Collegiate, and Civil. The greatest privilege possessed by man is to be allowed, while on earth, to contribute to the glory of God: a man who builds a church draws down a blessing on himself both for this life and that of the world to come, and likewise imparts under God the means of every blessing to his fellow creatures; hence we cannot feel surprised at the vast number of religious buildings erected by our Catholic forefathers in the days of faith, or at their endeavours to render those structures, by their arrangement and decoration, as suitable as their means could accomplish for their holy and important destination. It must have been an edifying sight to have overlooked some ancient city raised when religion formed a leading impulse in the mind of man, and when the honour and worship of the Author of all good was considered of greater importance than the achievement of the most lucrative commercial speculation. There stood the mother church, the great cathedral, vast in height, rising above all the towers of the parochial churches which surrounded her; next in scale and grandeur might have been discerned the

Digitized by Google

abbatial and collegiate churches with their vast and solemn buildings; each street had its temple raised for the true worship of God, *variously beautiful in design, but each a fine example of Christian art.* Even the bridges and approaches were not destitute of religious buildings, and many a beautiful chapel and oratory was corbelled out on massive piers over the stream that flowed beneath.

The great object I have in directing your attention to such a Catholic city is to illustrate the principle of decorative propriety in ecclesiastical buildings. We have here various edifices of various dimensions, various degrees of richness, various in arrangement, yet each bears on its very face the stamp of Catholic;—cathedral or abbey, church or oratory, they all show that they are dedicated to the one true faith, raised by men actuated by one great motive, the truly Catholic principle of dedicating the best they possessed to God. It would be both unjust and unreasonable to expect a few parishioners to erect as sumptuous an edifice to the Almighty as the clergy of a vast cathedral, and even if they could practically achieve such a result, it would be out of character for the use and intentions of a parish church; neither ought we to look to a private chapel or oratory erected by the unassisted piety of an individual for the extent or ornaments of a public church, unless, indeed, that individual was possessed of great wealth, and then, although not in dimensions, it should surpass in glory the usual decoration of such buildings. In a word, architectural propriety as regards ecclesiastical buildings requires that they should be as good, as spacious, as rich and beautiful, as the *means and numbers of those who are erecting them will permit.* The history of our present vast and magnificent churches fully exemplifies this principle; many of them in their origin were little better than thatched barns; it was the best that could be done at that early period: but when the wealth and influence of the Church increased, they were soon demolished to make way for more fitting structures; these in their turn were rebuilt with still greater magnificence. The ancient clergy were never satisfied, never content, never imagined that they had done enough; the scaffoldings were

Digitized by Google

round the walls and the cranes on the towers of many of the English abbeys at the time of their suppression.

It is not incumbent on all men to raise vast and splendid churches; but it *is* incumbent on all men to render the buildings they raise for religious purposes *more vast and beautiful than those in which they dwell.* This is all I contend for; but this is a feeling nearly, if not altogether, extinct. Churches are now built without the least regard to tradition, to mystical reasons, or even common propriety. A room full of seats at the least possible cost is the present idea of a church; and if any ornament is indulged in, it is a mere screen to catch the eye of the passer-by, which is a most contemptible deception to hide the meanness of the real building. How often do we see a front gable carried up to a respectable pitch, and we might naturally infer that this is the termination, both as regards height and form, of the actual roof; but on turning the corner we soon perceive that it is a mere wall cramped to hold it in its position, and that it conceals a very meeting-house, with a flat roof and low thin walls, perforated by mean apertures, and without a single feature or detail to carry out the appearance it assumed towards the street. Now the

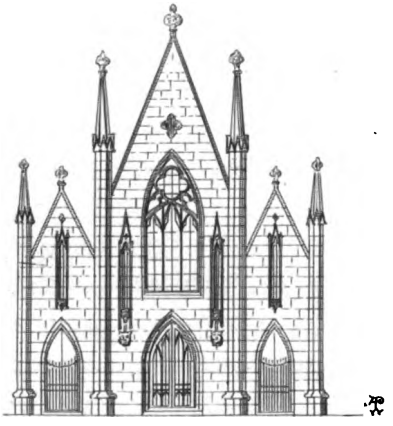

Street Elevation.

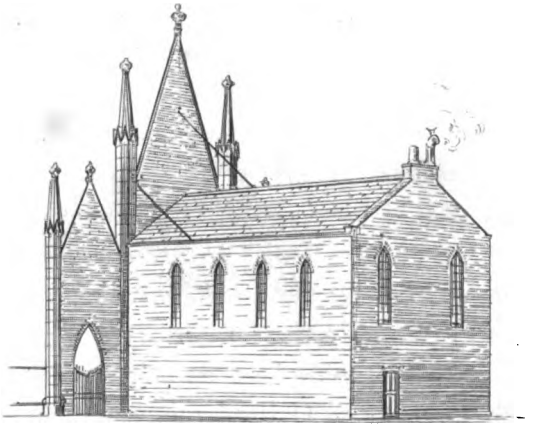

Side Perspective.

severity of Christian architecture is opposed to all deception. We should never make a building erected to God appear better than it really is

Digitized by Google

by artificial means. These are showy worldly expedients, adapted only for those who live by splendid deception, such as theatricals, mountebanks, quacks, and the like. Nothing can be more execrable than making a church appear rich and beautiful in the eyes of men, but full of trick and falsehood, which cannot escape the all-searching eye of God, to whom churches should be built, and not to man. Even under the Mosaic dispensation, the Holy of Holies, *entered only by the high priest*, was overlaid with gold; and how much more ought the interiors of our tabernacles to be lined with precious material, which are ten times more holy and deserving of it than the figurative tabernacle of the old law!—and yet in these times all that does not *catch the eye is neglected.* A rich looking antipendium often conceals rough materials, a depository for candle ends, and an accumulation of dirt, which are allowed to remain simply because they are out of sight. All plaster, cast-iron, and composition ornaments, painted like stone or oak, are mere impositions, and, although very suitable to a tea-garden, are utterly unworthy of a sacred edifice. "Omne secundum ordinem et honeste fiat." Let every man build to God according to his means, but not practise showy deceptions; better is it to do a little substantially and consistently with truth, than to produce a great but fictitious effect. Hence the rubble wall and oaken rafter of antiquity yet impress the mind with feelings of reverent awe, which never could be produced by the cement and plaster imitations of elaborate tracery and florid designs which in these times are stuck about mimic churches in disgusting profusion.

It is likewise essential to ecclesiastical propriety that the ornaments introduced about churches should be appropriate and significant, and not consist of *Pagan* emblems and attributes for buildings professedly erected for Christian worship. If the admirers of classic decoration were consistent, on the very principles which induced the ancients to set up their divinities, they should now employ other and more appropriate ornaments; as all those found in the temples and other buildings of the Pagans were in strict accordance with their mythology and customs: *they never intro-*

Digitized by Google

duced any emblem without a mystical signification being attached to it. Now, great as may be their enormities, I think it would be unjust to charge the advocates of revived Pagan decoration with an actual belief in the mythology of which they are such jealous admirers; hence they are guilty of the greater inconsistency, as the original heathens proceeded from conviction. They would not have placed urns on the tombs, had they not practised burning instead of burying the dead; of which former custom the urn was a fitting emblem, as being the depository for the ashes. Neither would they have decorated the friezes with the heads of sheep and oxen, had they not sacrificed those animals to their supposed gods, or placed inverted torches on the mausoleums, had they believed in the glories of the Resurrection. But what have we, as *Christians*, to do with all those things illustrative *only of former error?* Is our wisdom set forth by the owl of Minerva, or our strength by the club of Hercules? What have we (who have been redeemed by the sacrifice of our Lord himself) to do with the carcasses of bulls and goats? And how can we (who surround the biers of our departed brethren with blazing tapers, denoting our hope and faith in the glorious light of the Resurrection,) carve the *inverted torch of Pagan despair* on the very tomb to which we conduct their remains with such sparkling light? Let us away with such gross inconsistencies, and restore the Christian ideas of our Catholic ancestors, for they alone are proper for our imitation. But not only are the details of modern churches borrowed from Pagan instead of Christian antiquity, but the very plan and arrangement of the buildings themselves are now fashioned after a heathen temple; for which unsightly and inappropriate form modern churchmen and architects have abandoned those which are not only illustrative of the great mysteries of the Christian faith, but whose use has been sanctioned by the custom of more than twelve centuries.



Modern Tomb in the revived Pagan style.

Digitized by Google

I will now give the following distinct reasons why the architecture of the Greek temples cannot be introduced or imitated with propriety by Christians.

1. These temples were erected for an idolatrous worship, and were suited only for the idolatrous rites which were performed in them.



The interior, entered only by the priests, was comparatively small, and either dark or open at top, while the peristyle and porticoes were spacious, for the people who assisted without. There is not the slightest similarity between our worship and the idolatrous worship of the Greeks. We require that the people should be *within* the church, not outside. If, therefore, you adopt a perfect Greek temple, your interior will be confined and ill-suited for the intended purpose, while your exterior will occasion an enormous outlay without any utility. If, on the other hand, you strip a Greek temple of its external peristyle, and build your external walls in the place of the pillars, you entirely destroy the most beautiful feature of the architecture, and the building becomes a miserable departure from the style it professes to imitate.

2. The Greeks did not introduce windows in their temples; they are essentially necessary with us. Perforate the walls with windows, and you again destroy the simplicity and unity of Greek architecture, which its admirers extol as one of its greatest beauties.

3. Christian churches require bells, by the sound of which the faithful may be called to their devotions. The bells, to be distinctly heard, must be suspended in a tower or belfry, and these are features utterly unknown in Greek architecture. A tower composed of a number of small porticoes, set over one another, and placed in front of a mock

Digitized by Google

temple, is a most glaring absurdity; nor is a tower of this description, starting out of nothing at the top of a portico, any better. Figs. 1 and 2.

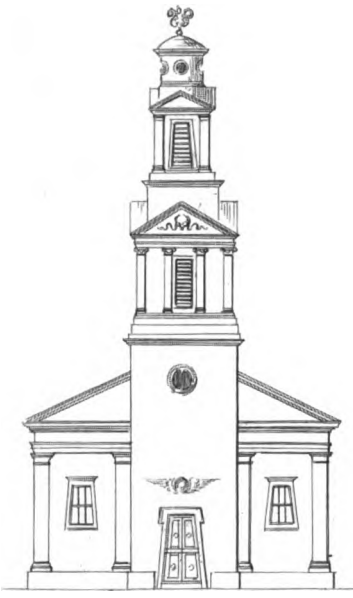

Figure 1.

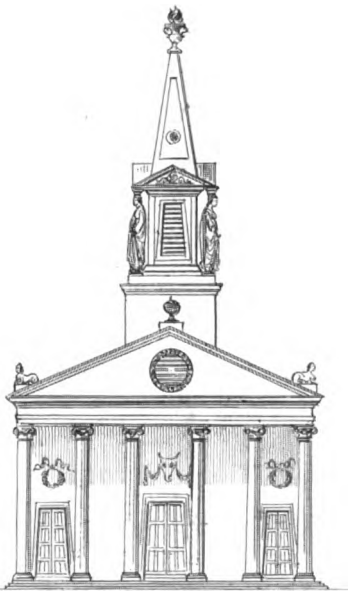

Figure 2.

4. Our northern climate requires an acute pitch of roof to prevent the accumulation of snow and to resist weather.[5] The Greeks, whose climate is the reverse of ours, had their roofs and pediments exceedingly flat; nor could they be raised to our proper pitch without violating the character of their architecture. Fig. 3.



Fig. 3.

In short, Greek temples are utterly inapplicable to

[5] It is to be remarked that flat-pitched roofs were not introduced into English pointed churches till after the decline of that style, and the marks of the old high gabled roofs are generally to be seen in the towers of those churches where the present roofs are flat, proving them to have been altered subsequent to the original erection of the buildings.

Digitized by Google

the purpose of Christian churches;[6] and the attempt is little short of madness when our country is literally covered with beautiful models of ecclesiastical structures of every dimension, *the architecture and arrangement of which have originated in their wants and purpose.* An old English parish church, as originally used for the ancient worship, was one of the most beautiful and appropriate buildings that the mind of man could conceive; every portion of it answered both a useful and mystical purpose. There stood the tower, not formed of *detached and misapplied* portions of architectural detail stuck over one another to make up a height, but solid buttresses and walls rising from a massive base, and gradually diminishing and enriching as they rise, till they were terminated in a heaven-pointing spire surrounded by clusters of pinnacles, and forming a beautiful and instructive emblem of a Christian's brightest hopes. These towers served a double purpose, for in them hung the solemn sounding bells to summon the people to the offices of the church, and by their lofty elevation they served as beacons to direct their footsteps to the sacred spot. Then the southern porch, destined

[6] Neither are they better adapted for domestic purposes; for it is still more absurd to see two or three tiers of windows introduced in the shell of a Greek temple, the roof of which is broken by numerous stacks of vainly disguised chimneys. Yet notwithstanding the palpable impracticability of adapting the Greek temples to our climate, habits, and religion, we see the attempt and failure continually made and repeated: post-office, theatre, church, bath, reading-room, hotel, methodist chapel, and turnpike-gate, all present the eternal sameness of a Grecian temple outraged in all its proportions and character.

Digitized by Google

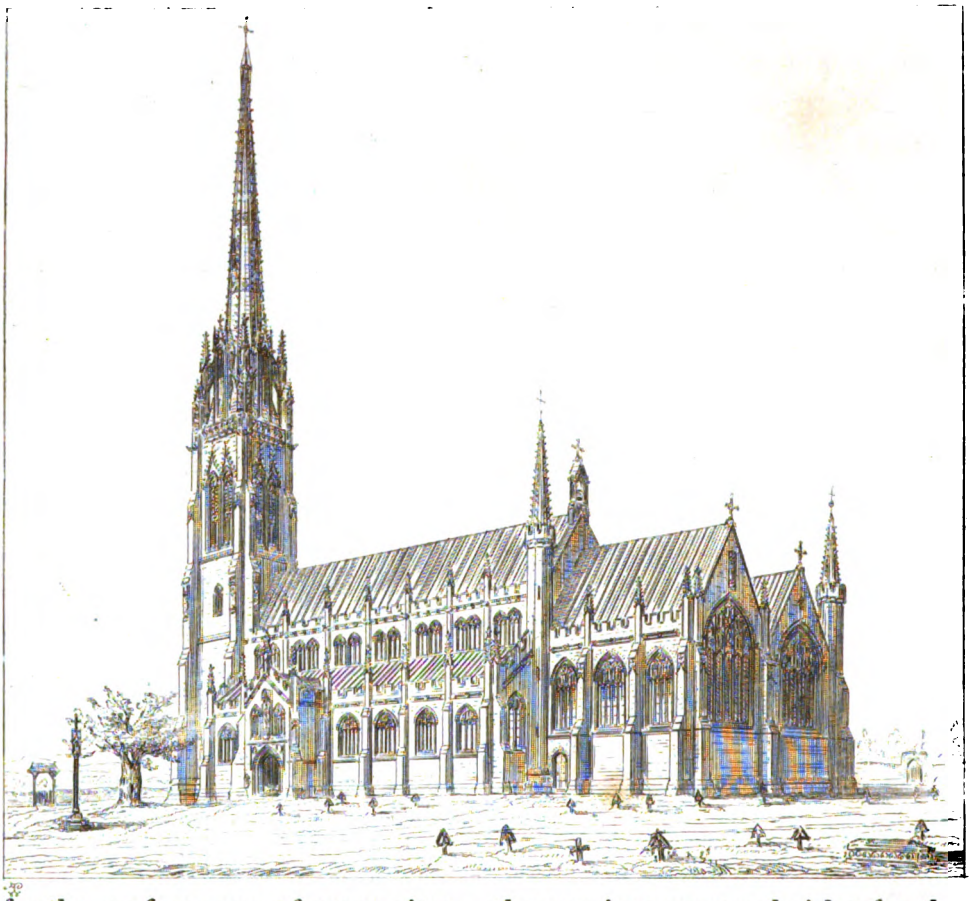

for the performance of many rites,—the spacious nave and aisles for the faithful,—the oaken canopy carved with images of the heavenly host, and painted with quaint and appropriate devices,—the impressive doom or judgment pictured over the great chancel arch,—the fretted screen and rood loft,—the mystical separation between the sacrifice and the people, with the emblem of redemption carried on high and surrounded with glory,—the great altar, rich in hangings, placed far from irreverent gaze, and with the brilliant eastern window terminating this long perspective; while the chantry and guild chapels, pious foundations of families and confraternities, contributed greatly to increase the solemnity of the

Digitized by Google

Digitized by Google

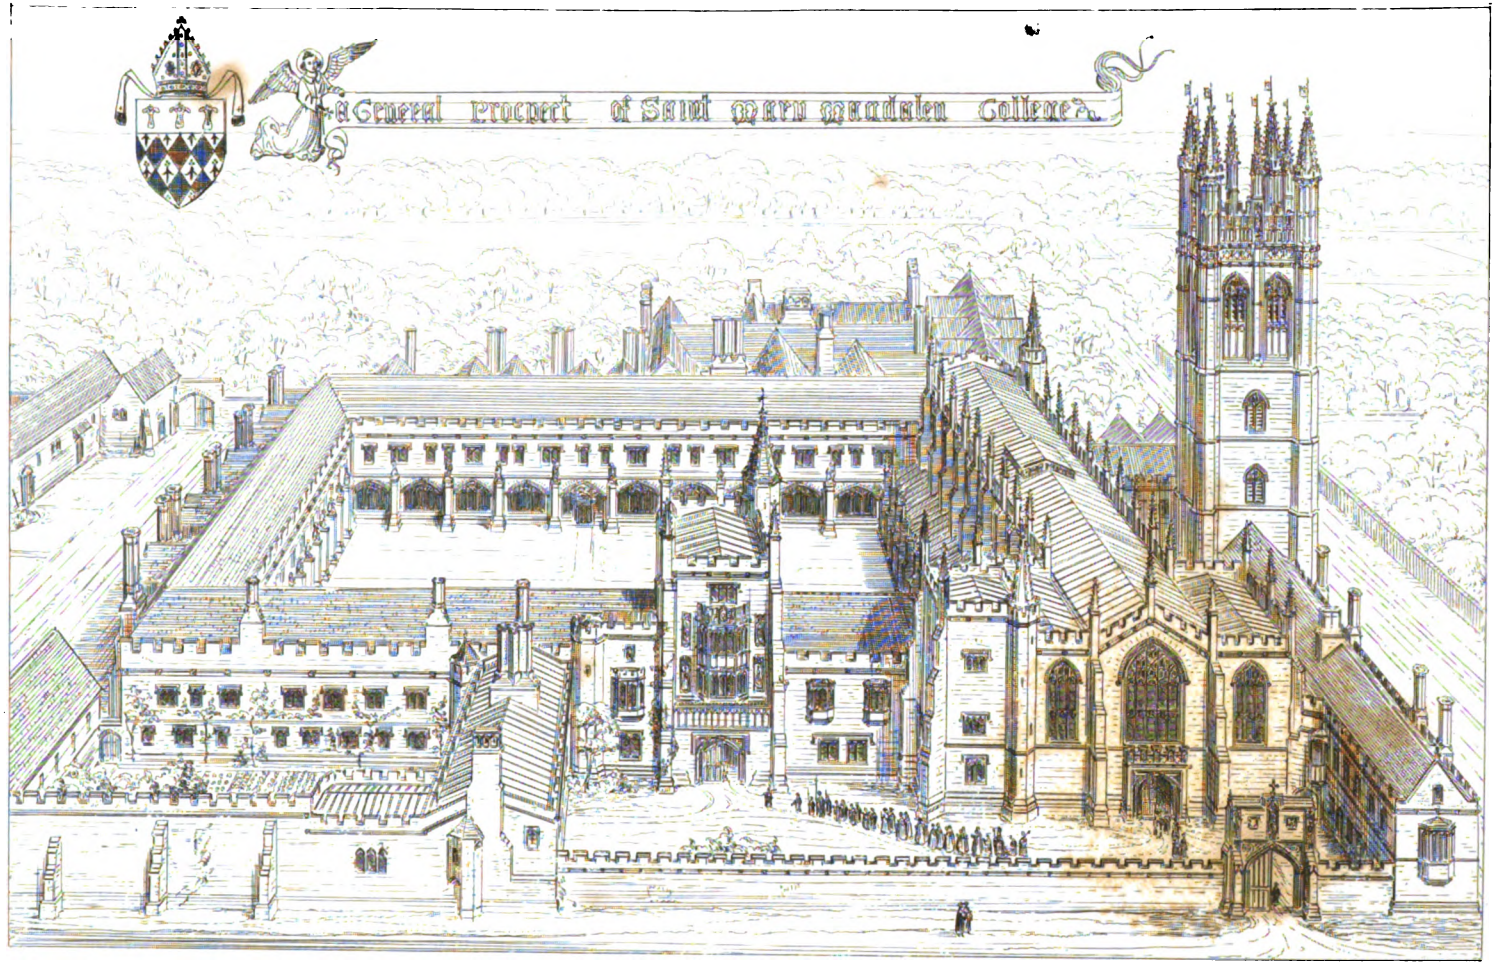

Plate IX

London Published by John Weale 59 High Holborn. 1841.

Digitized by Google

Digitized by Google

Digitized by Google

glorious pile. Such is but a faint outline of the national edifices which have been abandoned for pewed and galleried assembly rooms, decorated only with gas fittings and stoves, and without so much as one holy or soul-stirring emblem about them.

We will now examine architectural propriety with reference to collegiate architecture. Our old English Catholic colleges (Plate IX.) will illustrate most beautifully the principle I wish to demonstrate. The main feature of these buildings was the chapel: to our Catholic forefathers the celebration of the divine office with becoming solemnity and splendour formed a primary consideration, and ample was the provision made for this purpose in all the old collegiate foundations. The place set apart for this holy purpose generally towered over the surrounding buildings. The chapels of King's College and Eton can be distinctly seen many miles before the subordinate buildings can be discerned. Oxford, at a distance, presents a complete grove of towers, spires, and pinnacled turrets, rising from the collegiate churches. After this principal feature, every portion of these edifices had its distinguishing character and elevation: in order to give due effect to the gate-house, refectory, and other important parts of the building, the chambers never exceeded the height of one story above the ground floor.[7] A very characteristic feature of the old collegiate buildings is the position of the chimneys, which are made to project from the front walls of the buildings. This, I am well aware, has been considered a defect by ignorant modern artists, but will be found on examination, like all other practices of the ancient architects, to be based on excellent practical reasons.

The advantages of this arrangement are as follow: 1. All the internal

[7] In those ancient colleges where these chambers have been raised in modern times, the effect of the original design has been completely ruined, and the new collegiate buildings at St. John's, Cambridge, from their height, have all the appearance of a Gothic warehouse or factory. This is another instance of the folly of using pointed details without following the spirit of the ancient buildings.

Digitized by Google

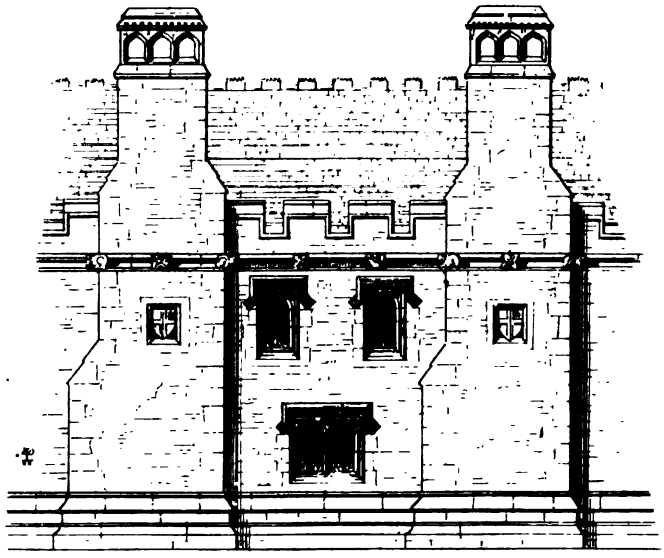

space usually occupied by chimney stacks, and which is very considerable, is gained to the apartments.—2. The stacks of chimneys thus placed act as buttresses to the wall.—3. The danger of fire consequent on chimney flues passing through the woodwork of the roofs is entirely avoided.—4. A great variety of light and shadow, and a succession of bold features, are gained in the building. It is impossible to conceive any buildings better adapted for collegiate purposes, either as regards arrangement or design, than the two establishments founded by that great and good man, William of Wykeham, at Winchester and Oxford. He had two classes to consider in his foundation at Winchester, the clergy and the students. For the former he provided beautiful cloisters retired from the rest of the edifice, suited for contemplation and devotion; while for the latter he assigned ample space for healthy recreation in bad weather, and level meadows for summer sports. The whole character of these buildings is at once severe, elegant, and scholastic; it is precisely what it should be, as the will of Henry the Sixth specifies of the domestic portion of his college at Cambridge, that it should be built *without too great superfluity of detail or busie moulding*;[8] and on this principle Wykeham designed

[8] Notwithstanding the directions contained in this will, where the founder's intentions regarding his collegiate buildings are fully and distinctly expressed, the architect (when the glorious opportunity offered a few years since of fulfilling them to the letter, and erecting a

Digitized by Google

his building. The external ornaments are few, but admirably selected: an image of our blessed Ladye with our Lord is placed over each gateway, in reference to the college being dedicated to God, under the invocation of his blessed mother, towards whom the good bishop entertained an extraordinary devotion, even from his tender years. The other images on either side of the centre niche are those of the angel Gabriel, and Wykeham himself in a kneeling position.

The interior of the chapel (now wofully disfigured) as left by the founder, must have been glorious in the extreme; it consisted of a choir and ante-chapel, by the side of which rose the bell tower, simple, but elegant and lofty.

The members of the society were buried in the cloisters, and also in the ante-chapel, as their memorials of beautifully engraved brass testify. The intention of these was, doubtless, both to incite the surviving community to pray for their souls' repose, and to remind them continually of the similar fate that would inevitably befall them. How Catholic wisdom and Catholic piety stand conspicuous in all the arrangements of these noble buildings! how great the master mind who planned and executed them, and yet how few are there in these days able to understand or willing to imitate them! Can we conceive a more atrocious scheme to destroy the solemn grandeur of Wykeham's church than to allow such a man as Sir Joshua Reynolds to design a transparency for the western end, and appoint *James Wyatt the destructive* to overturn the ancient features and arrangements, setting up the subsellæ of the stalls as brackets for book-desks, and covering the walls with meagre decorations and Bernasconi Gothic!

Modern collegiate buildings,[9] especially on the continent, are the reverse

truly fine building) was allowed to depart entirely from them, and raise a florid structure, arranged in direct opposition to all old collegiate traditions, and the very decorations of which were misapplied details taken from the original chapel, which had been elaborately enriched by the ancient builders for the purpose of distinguishing its sacred destination from the surrounding erections.

[9] It is impossible to conceive a more uncollegiate looking building than what is called the

Digitized by Google

of all that I have been describing. In them we look in vain for the solemn quadrangle, the studious cloister, the turreted gate-house, the noble refectory with its oak-beamed roof, the mullioned windows and pinnacled parapet, and lofty tower of the church: not a ghost of these venerable characteristics of a college is to be seen, but generally one uniform mass, unbroken either in outline or in face, undistinguishable from other large buildings which surround it. As to its purpose, it might be taken for a barrack hospital or asylum. How is it possible to expect that the race of men who proceed from these factories of learning will possess the same feelings as those who anciently went forth from the Catholic structures of Oxford and Winchester! We cannot sufficiently admire our English universities; there is nothing like them existing on the continent, notwithstanding the miserable additions and modernizations which have so greatly disfigured the ancient buildings. There is more Catholic scholastic architecture to be found united at Oxford than in any place I have ever visited. Let us hope and pray that its glories may not exist in vain, but that learned and thinking men may be led to draw a parallel in their minds between the faith of those good souls who founded these noble institutions, and our present degraded and half-infidel condition, by which consideration they may be led back to Catholic unity and faith, in which great works can be alone accomplished, or blessings derived from them.



In the third and last place, we will consider architectural propriety with reference to domestic and civil architecture. Most of the mansions erected at the present day in the Italian or pointed architecture, are either bur-

London University, with its useless dome and portico. It may, however, be urged in its defence that any thing *ecclesiastical or Christian* would be very inappropriate, and that the *Pagan* exterior is much more in character with the intentions and principles of the institution.

Digitized by Google

lesques or false applications of both these styles. In the first place, what does an Italian house do in England? Is there any similarity between our climate and that of Italy? Not the least. Now I will maintain and prove that climate has always had a large share in the formation of domestic architecture, and the Italian is a good illustration of the truth of this remark. The apertures are small; long colonnades for shade, and the whole building calculated for retreat, and protection from heat; the roofs are flat in pitch, from the absence of heavy snow; and plan and outline are both suited to the climate to which the architecture belongs. But we demand in England the very reverse of all this for comfort. We cannot fortunately import the climate of a country with its architecture, or else we should have the strangest possible combination of temperature and weather; and, within the narrow compass of the Regent's Park, the burning heat of Hindoostan, the freezing temperature of a Swiss mountain, the intolerable warmth of an Italian summer, with occasional spots

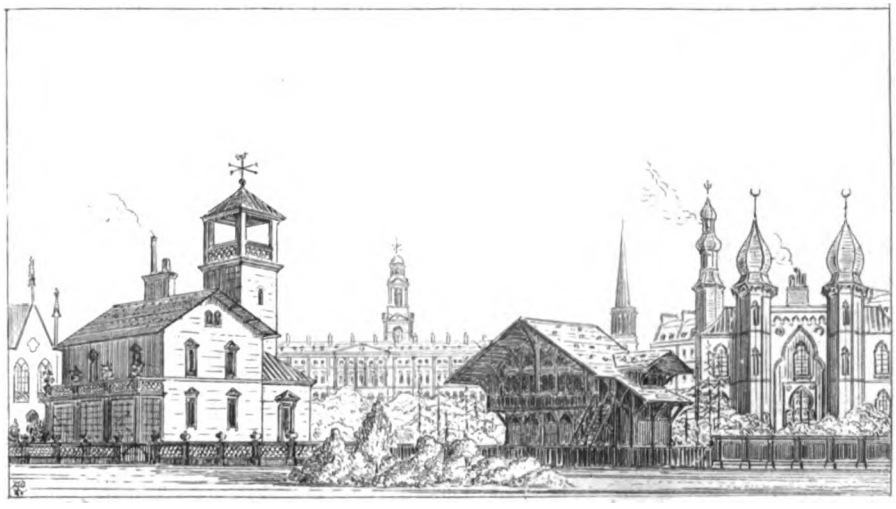

of our native temperature. I wonder if these ideas ever occur to those who design Italian gardens on the moorlands of England. Truly it will not be a matter of surprise if some searcher after novelty try to cultivate a jungle for imitation tiger-hunting on some old English estate.

Digitized by Google

Another objection to Italian architecture is this,—we are not Italians, we are Englishmen. God in his wisdom has implanted a love of nation and country in every man, and we should always cultivate this feeling;—we ought to view the habits and manners of other nations without prejudice, derive improvement from all we observe admirable, but we should never forget our own land. Such is, indeed, the extraordinary amalgamation of architecture, style, and manners now in progress, that were it not for the works of nature which cannot be destroyed, and the glorious works of Christian antiquity which have *not yet* been destroyed, Europe would soon present such sameness as to cease to be interesting. Already a sort of bastard Greek, a nondescript modern style, has ravaged many of the most interesting cities of Europe; replacing the original national buildings with unmeaning lines of plaster fronts, without form, without colour, without interest. How many glorious churches have been destroyed within the last few years (*pour faire une place*) for the occasional exercise of the national guard! where a few stunted trees and a puddle of water in a stone basin, which spouts up occasionally some few feet in height, is all we have to see in exchange for some of the most interesting memorials of ancient piety.

England is rapidly losing its venerable garb; all places are becoming alike; every good old gabled inn is turned into an ugly hotel with a stuccoed portico, and a vulgar coffee-room lined with staring paper, with imitation scagliola columns, composition glass frames, an obsequious cheat of a waiter, and twenty per cent. added to the bill on the score of the modern and elegant arrangements. Our good old St. Martin's, St. John's, St. Peter's, and St. Mary's streets, are becoming Belle-vue Places, Adelaide Rows, Apollo Terraces, Regent Squares, and Royal Circuses. Factory chimneys disfigure our most beautiful vales; Government preaching-houses, called churches, start up at the cost of a few hundreds each, by the side of Zion chapels, Bethel Meetings, New Connexions, and Socialist Halls. Timbered fronts of curious and ingenious design are swept away before the resistless torrent of Roman-cement men, who buy their ornaments by

Digitized by Google

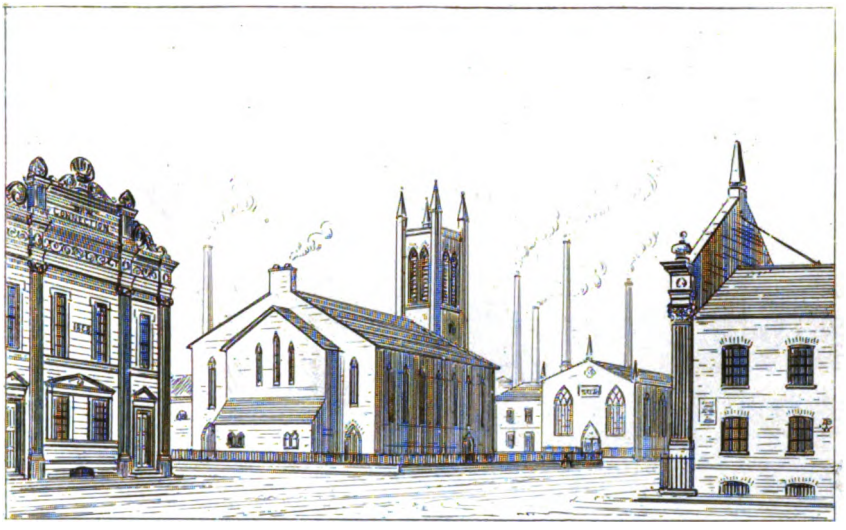

the yard, and their capitals by the ton. Every linen-draper's shop apes to be something after the palace of the Cæsars; the mock stone columns are fixed over a front of plate glass to exhibit the astonishing bargains; while low-ticketed goods are hung out over the trophies of war. But this is not all; every paltry town has a cigar divan, with something stuck out to look Turkish, and not unfrequently a back parlour travestied into a vile burlesque of eastern architecture. In short, national feelings and national architecture are at so low an ebb, that it becomes an absolute duty in every Englishman to attempt their revival. Our ancient architecture can alone fur-

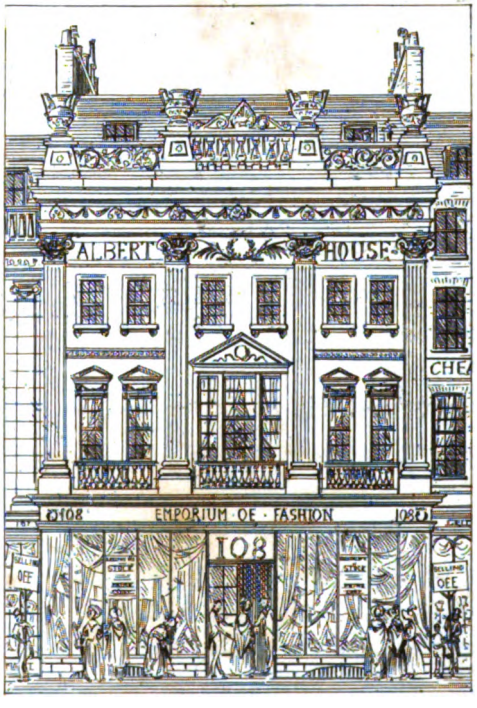

nish us with the means of doing this successfully; but, unfortunately, those who profess to admire pointed architecture, and who strive to imitate it, produce more ridiculous results than those who fly to foreign aid. What can be more absurd than houses built in what is termed the castellated style? Castellated architecture originated in the wants consequent on a certain state of society: of course the necessity of great strength, and the means of defence suited to the military tactics of the day, dictated to the builders of ancient castles the most appropriate

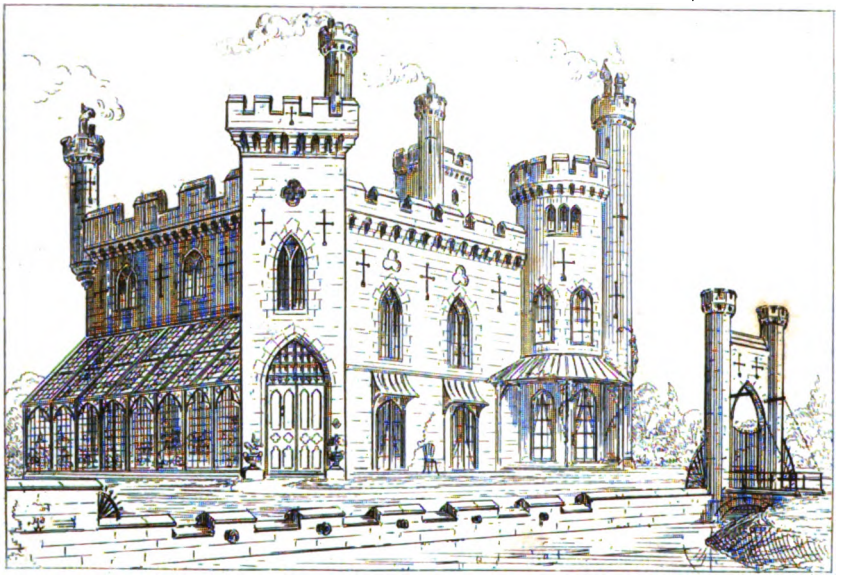

Modern Castellated Mansion.

style for their construction. Viewed as historical monuments, they are of surprising interest, but as models for our imitation they are worse than useless. What absurdities, what anomalies, what utter contradictions do not the builders of modern castles perpetrate! How many portcullises which will not lower down, and drawbridges which will not draw up!—how many loop-holes in turrets so small that the most diminutive sweep could not ascend them!—On one side of the house machicolated parapets, embrasures, bastions, and all the show of strong defence, and

Digitized by Google

round the corner of the building a conservatory leading to the principal rooms, through which a whole company of horsemen might penetrate at one smash into the very heart of the mansion!—for who would hammer against nailed portals when he could kick his way through the green-house? In buildings of this sort, so far from the turrets being erected for any particular purpose, it is difficult to assign any destination to them after they are erected, and those which are not made into *chimneys* seldom get other occupants than the rooks. But the exterior is not the least inconsistent portion of the edifices, for we find guard-rooms without either weapons or guards; sally-ports, out of which nobody passes but the servants, and where a military man never did go out; donjon keeps, which are nothing but drawing-rooms, boudoirs, and elegant apartments; watch-towers, where the housemaids sleep, and a bastion in which the butler cleans his plate: all is a mere mask, and the whole building an ill-conceived lie.

We will now turn to those mansions erected in what is termed the Abbey style, which are not more consistent than the buildings I have just described. To this class Fonthill belonged, now a heap of ruins, and modern ruins, too, of mere brick and plaster. In such a house something of an ecclesiastical exterior had been obtained at an enormous expense, and a casual passer-by might have supposed from some distance that the place really belonged to some religious community; but on a nearer approach the illusion is soon dissipated, and the building, which had been raised somewhat in the guise of the solemn architecture of religion and antiquity, discovers itself to be a mere toy, built to suit the caprice of a wealthy individual, and devoted to luxury. The seemingly abbey-gate turns out a modern hall, with liveried footmen in lieu of a conventual porter; the apparent church nave is only a vestibule; the tower, a lantern staircase; the transepts are drawing-rooms; the cloisters, a furnished passage; the oratory, a lady's boudoir; the chapter-house, a dining-room; *the kitchens alone* are real; every thing else is a deception. Articles of fashionable luxury, glasses in profusion, couches and ottomans,

Digitized by Google

fill the chambers of the mock convent, from whence a prayer never ascends or into which a religious man never enters;—all, in fine, is a mockery and thing of fashion, transient and perishable as the life of its possessor; and if the structure be substantial enough to last his time, it soon after becomes the subject of some auctioneer's puff: its walls are covered with placards; brokers divide the moveables; the whole falls to decay, and is soon only mentioned as a splendid folly.

The old English Catholic mansions were the very reverse of those I have been describing; they were substantial appropriate edifices, suited by

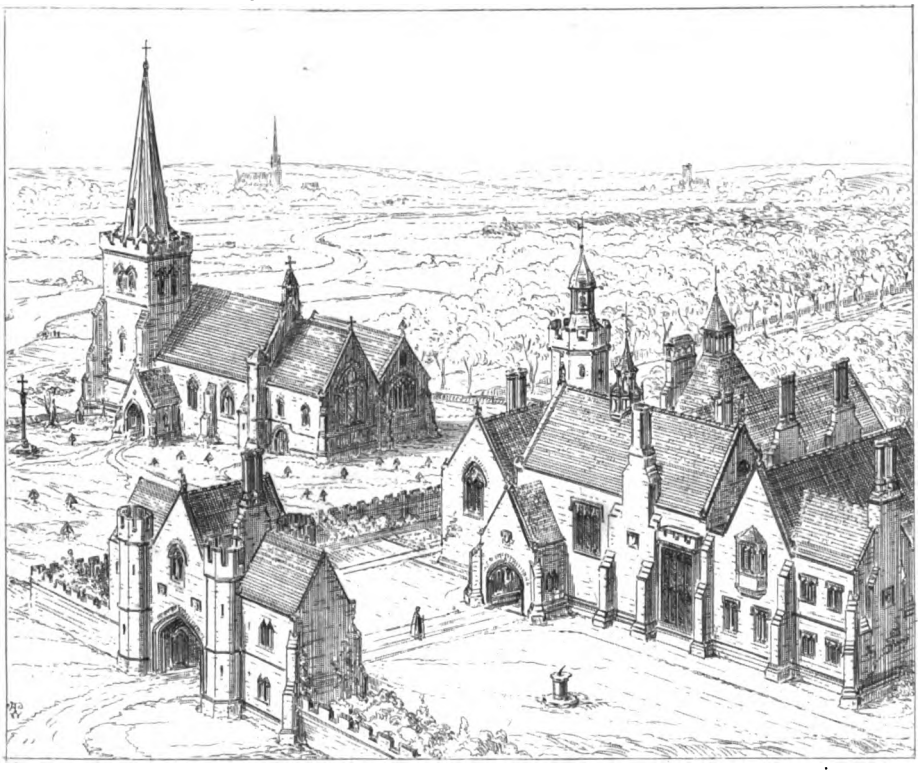

Old English Mansion.

their scale and arrangement for the purposes of habitation. Each part of these buildings indicated its particular destination: the turreted gate-house and porter's lodging, the entrance porch, the high-crested roof and

Digitized by Google

Louvred hall, with its capacious chimney, the guest chambers, the vast kitchens and offices, all formed distinct and beautiful features, not *masked or concealed under one monotonous front*, but by their variety in form and outline increasing the effect of the building, and presenting a standing illustration of good old English hospitality; while the venerable parish church in the immediate vicinity, with its grey spire and family chantry, showed that the care spiritual was not neglected by our ancestors in the erection of their temporal dwellings.

Every person should be lodged as becomes his station and dignity, for in this there is nothing contrary to, but in accordance with, the Catholic principle; but the mansions erected by our ancestors were not the passing whim of a moment, or mere show places raised at such an extravagant cost as impoverished some generations of heirs to the estates, but solid, dignified, and Christian structures, built with due regard to the general prosperity of the family; and the almost constant residence of the ancient gentry on their estates rendered it indispensable for them to have mansions where they might exercise the rights of hospitality to their fullest extent. They did not confine their guests, as at present, to a few fashionables who condescend to pass away a few days occasionally in a country house; but under the oaken rafters of their capacious halls the lords of the manor used to assemble all their friends and tenants at those successive periods when the church bids all her children rejoice, while humbler guests partook of their share of bounty dealt to them by the hand of the almoner beneath the groined entrance of the gate-house. Catholic England was merry England, at least for the humbler classes; and the architecture was in keeping with the faith and manners of the times,—at once strong and hospitable. There is a great reviving taste for ancient domestic architecture, but a vast many pretended admirers of old English beauties, instead of imitating the Tudor period, when domestic architecture was carried to a high state of perfection, stop short at the reign of Elizabeth, the very worst kind of English architecture; and, strange to say, these unmeaning conglomerations of debased forms have

Digitized by Google

been classed into a regular style, and called after the female tyrant during whose reign they were executed. The only reason I can assign for the fashionable rage for this architecture (if so it may be called) is, that its character is so corrupt, mixed, and bad, that the anachronisms and anomalies so frequently perpetrated by modern architects are made to pass muster under the general term of Elizabethan; and certainly I cannot deny that the appellation is very appropriate when applied to corrupted design and decayed taste.

I must here mention two great defects very common in modern pointed buildings, both of which arise from the great fundamental principle of decorating utility not being understood. In the first place, many architects apply the details and minor features of the pointed style to classic *masses* and arrangements; they adhere scrupulously to the regularity and symmetry of the latter, while they attempt to disguise it by the mouldings and accessories of the former. They must have two of every thing, one on each side: no matter if all the required accommodation is contained in one half of the design, a shell of another half must be built to keep up uniformity. What can be more absurd? Because a man has a real door to enter his house by on one side, he must have a mock one through which he cannot get in on the other. How inconsistent is it to make and glaze a window which is to be *walled up* ab initio! But to see the full absurdity of this system, let us only imagine the builders of the ancient colleges, after having finished a church and refectory on one side of a quadrangle, running up something to repeat them by way of a pendant on the other, so as to appear two churches and two dining-halls to one college. In the second place, when modern architects avoid this defect of regularity, they frequently fall into one equally great with regard to irregularity; I mean when a building is *designed to be picturesque*, by sticking as many ins and outs, ups and downs, about it as possible. *The picturesque effect of the ancient buildings results from the ingenious methods by which the old builders overcame local and constructive difficulties.* An edifice which is arranged with the principal view of looking picturesque is sure to resemble an

Digitized by Google

artificial waterfall or a made-up rock, which are generally so *unnaturally natural* as to appear ridiculous.

An architect should exhibit his skill by turning the difficulties which occur in raising an elevation from *a convenient plan* into so many *picturesque beauties;* and this constitutes the great difference between the principles of classic and pointed domestic architecture. In the former *he would be compelled to devise expedients to conceal these irregularities;* in the latter *he has only to beautify them.* But I am quite assured that all the irregularities that are so beautiful in ancient architecture are the result of certain necessary difficulties, and were never purposely designed; for to make a building inconvenient for the sake of obtaining irregularity would be scarcely less ridiculous than preparing working drawings for a new ruin. But all these inconsistencies have arisen from this great error,—*the plans of buildings are designed to suit the elevation, instead of the elevation being made subservient to the plan.*

Under the head of architectural propriety we have also to consider the scale and proportions of buildings. Without vastness of dimensions it is impossible to produce a grand and imposing effect in architecture; still, unless these be regulated on true principles, they may destroy their effect by their very size; and here I wish to draw your attention to a point which will prove the great superiority of the Christian architecture of the middle ages over that of classic antiquity, or of the revived pagan style. In pointed architecture the different details of the edifice are *multiplied with the increased scale of the building:* in classic architecture they are *only magnified.*

To explain this more fully, if the pointed architects had a buttress and pinnacle to erect against some vast structure, such as the Cathedral of Cologne or Amiens, they did not merely increase its dimensions by gigantic water tables, enormous crockets, and a ponderous finial. No! they subdivided it into a *cluster* of piers and pinnacles; they panelled the front, enriched it by subordinate divisions, and by these means the pinnacles of Cologne

Digitized by Google

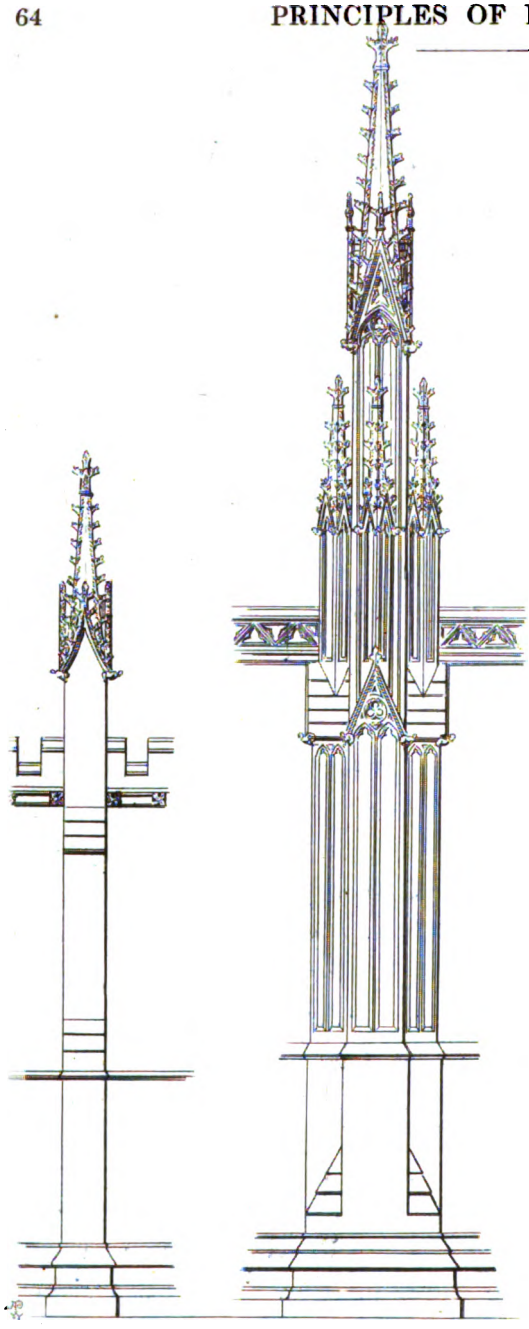

Small Buttress. Large Buttress, subdivided in parts.

appear five times as large as those of an ordinary church,[10] which could never have been the case had they only *enlarged the scale instead of multiplying the parts*. But the very reverse of this is the case in classic architecture; a column or cornice is the same, *great or small*, whether they are employed in front of an ordinary house or of a vast temple; no distinction except that of size is ever made;

[10] A pillar in classic architecture is a mere cylinder, of large or small diameter. In the pointed style a pillar is subdivided into shafts, which increase in number with its size, and form beautiful clusters.

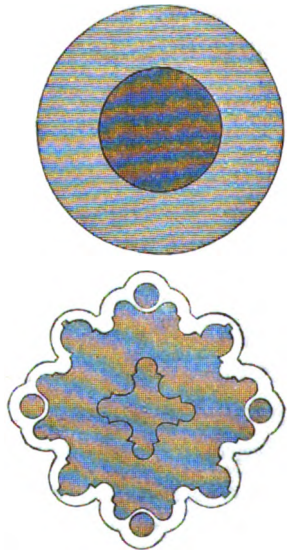

Digitized by Google

there are the *same number of diameters*, the *same number of mouldings*, the *same relative projections;*—it is merely a *magnifying power* applied to architecture. What is the result? Till you actually stand under these buildings, and find that your chin does not come up to the plinth of the base, you do not perceive the scale. This is perfectly exemplified at St. Peter's. The effect on all who first enter it is that of disappointment; it does not appear any thing like so large as they anticipated. Some of its admirers have tried to pass this off as a great beauty, and have attributed it to its beautiful proportion. This reasoning will not, however, stand the test of close examination; it is essentially false. One of the great arts of architecture is to render a building more vast and lofty in appearance than it is in reality. The contrary effect produced by St. Peter's is not the least among its many defects, and it is purely owing to the *magnifying* instead of the *multiplying principle* having been followed. The great size of its various parts and mouldings required the introduction of colossal figures, which are certain to reduce the appearance of size in any buildings where they are used.

The human figure is a general standard for scale. We are accustomed to assimilate the idea of about five feet nine inches with the height of a man. Hence, be a drawing ever so small, by inserting a diminutive human figure it will immediately convey an idea of the intended size; and on the contrary, if the figures in a drawing be over large, the apparent space represented is immediately reduced in appearance. So is it in architecture: a figure of eighteen feet high will reduce one hundred feet to less than forty in appearance; and the mystery of the disappointing effect of scale in St. Peter's is satisfactorily accounted for. It is all very well for guides and valets de place to astonish travellers by stating that three persons may sit on the great toe of a statue, or that if a figure were laid on its back five men might straddle across the nose; *so much the worse for the effect of the building where such a figure is placed.*

In pointed architecture we seldom find any images larger than the human size, and generally much less. Hence the surprising effect of

Digitized by Google

height and scale conveyed by many old Catholic buildings, which are not in reality half the size of some of their more modern and semi-pagan rivals at Rome.

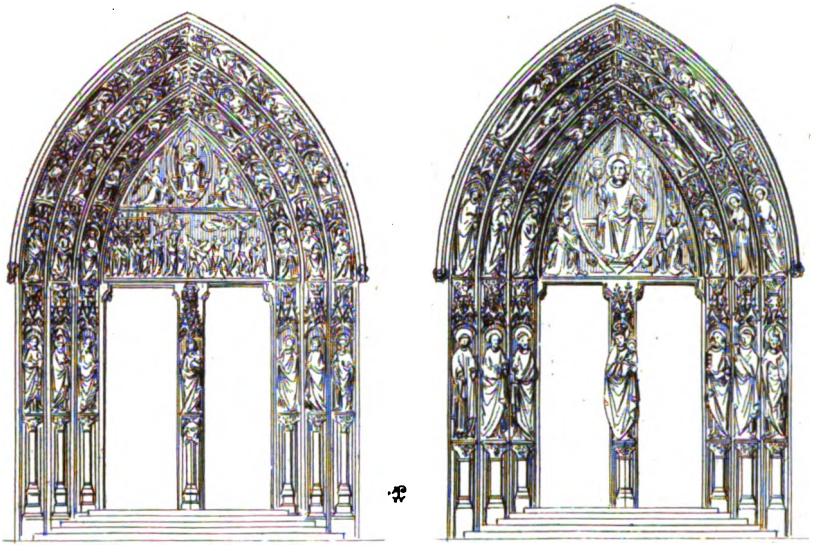

Illustration of the different effects of scale produced by large or small statues in the same space.

In general our English churches are deficient in internal height; not that our national style of Christian art does not possess some fine specimens of this important feature, as in the glorious church of St. Peter, Westminster; but I think the internal vastness of Amiens, Beauvais, Chartres, and others of the French churches, should serve as useful examples to us in this respect in the revival of Pointed and Christian architecture in England. Nothing can be conceived more majestic than those successions of arches divided by light and elegant clusters of shafts running up to an amazing height, and then branching over into beautiful intersected ribs, suspending a canopy of stone at the enormous height of not unfrequently one hundred and fifty feet. Internal altitude is a feature which would add greatly to the effect of many of our fine English churches, and I shall ever advocate its introduction, as it is a characteristic of foreign pointed architecture of which we can avail ourselves without violating the

Digitized by Google

principles of our own peculiar style of English Christian architecture, from which I would not depart in this country on any account. I once stood on the very edge of a precipice in this respect, from which I was rescued by the advice and arguments of my respected and revered friend Dr. Rock, to whose learned researches and observations on Christian antiquities I am highly indebted, and to whom I feel it a bounden duty to make this public acknowledgment of the great benefit I have received from his advice. Captivated by the beauties of foreign pointed architecture, I was on the verge of departing from the severity of our English style, and engrafting portions of foreign detail and arrangement. This I feel convinced would have been a failure; for although the great principles of Christian architecture were every where the same, each country had some peculiar manner of developing them, and we should continue working in the same parallel lines, all contributing to the grand whole of Catholic art, but by the very variety increasing its beauties and its interest.

In conclusion, Christian verity compels me to acknowledge that there are hardly any defects which I have pointed out to you in the course of this Lecture which could not with propriety be illustrated by my own productions at some period of my professional career. Truth is only gradually developed in the mind, and is the result of long experience and deep investigation. Having, as I conceive, discovered the true principles of pointed architecture, I am anxious to explain to others the errors and misconceptions into which I have fallen, that they, profiting by my experience, may henceforward strive to revive the glorious works of Christian art in all the ancient and *consistent* principles. Let then the Beautiful and the True be our watchword for future exertions in the overthrow of modern paltry taste and paganism, and the revival of Catholic art and dignity.

✠

Laus Deo!

UNIV. ... IGAN,

FEB 18 1913

Digitized by Google

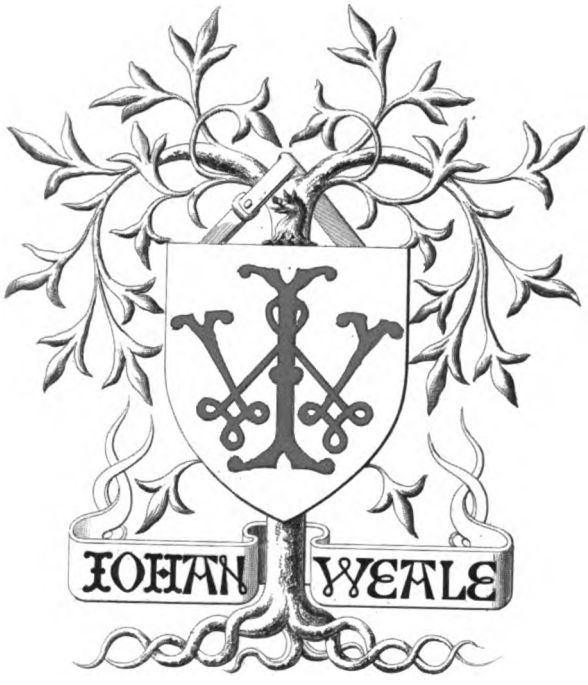

Digitized by Google

WORKS RECENTLY PUBLISHED

ON THE VARIOUS BRANCHES OF

ARCHITECTURE, CIVIL AND MILITARY ENGINEERING, MECHANICS, NAVAL ARCHITECTURE, &c., &c.

BY JOHN WEALE,

ARCHITECTURAL LIBRARY, 59, HIGH HOLBORN,

Where an Extensive Stock of all the approved Publications relating to the above Subjects, and to the Fine Arts, whether Foreign or Domestic, is constantly on Sale.

Architecture.

1.

In 4to., very neat in half-morocco, with about 130 Illustrations on wood and copper, Price 15*s.*; some copies with illuminated title-page, &c., and with India proofs, Price £1. 4*s.*

THE TRUE PRINCIPLES OF POINTED OR CHRISTIAN ARCHITECTURE:

SET FORTH IN TWO LECTURES DELIVERED AT ST. MARIE'S, OSCOTT,

BY A. WELBY PUGIN, ARCHITECT, AND PROFESSOR OF ANTIQUITIES IN THAT COLLEGE.

The following important facts are fully explained in this Work:

1. That all the Ornaments of pure Pointed Edifices were merely introduced as decorations to the essential constructions of those Buildings.
2. That the construction of Pointed Architecture was varied to accord with *the properties of the various materials employed*, shown by ancient examples of Stone, Timber, and Metal construction.
3. That no features were introduced in the ancient Pointed Edifices, which were not *essential either for convenience or propriety.*
4. That Pointed Architecture is most consistent, as it *decorates the useful portions of Buildings, instead of concealing or disguising them.*
5. That true principles of architectural proportion are only found in Pointed Edifices.
6. That the defects of modern Architecture are principally owing to *the departure from ancient consistent principles.*

It will be readily perceived from these heads, that the present Work furnishes the means for testing architectural excellence, by setting forth the consistent principles of ancient design. Hitherto architectural criticism has been little more than mere capricious opinion, and few persons could give a satisfactory reason for their approval or dislike of a Building. The laws of Architectural Composition are based on equally sound principles as those of Harmony or Grammar, and *that they can be violated with greater impunity is simply owing to their being less understood.* It is humbly hoped that this Work, which is the result of long experience and patient research, will supply in a great measure the want of *sound information* that exists on this important subject; and by explaining the *consistent principles* of Pointed Architecture, which are *inseparable from pure taste*, furnish a standard by which the excellence of the ancient Buildings may be duly appreciated, and the extravagances and inconsistencies of modern styles readily discerned.

Among the Illustrations will be found several interesting examples of ancient Roofs, Ceilings, Fittings of Rooms, Railings, Hinges, and Ornamental Iron-work, Silver Shrines and Reliquaries, Jambs, Basements, Water-tables, and details of Stone-work, Jointing of Masonry, and Perspective Views of Ecclesiastical, Collegiate, and Domestic Buildings; all drawn from Original Sketches by the Author.

Digitized by Google

2.

WINDSOR CASTLE:

Illustrated by the late SIR JEFFRY WYATVILLE, R. A., F. R. S., &c.

DEDICATED, BY EXPRESS PERMISSION,

To Her Most Gracious Majesty the Queen.

In obedience to a "Command" from His late Majesty King William the Fourth, in 1834, Sir Jeffry Wyatville began this Work, with the determination of rendering it fully worthy the subject.

On her accession, Her Majesty the Queen condescended, by an autograph, to express her "entire approval" of Sir Jeffry's proceeding with the Work; which was on the eve of completion at the time of his death in February, 1840, and is now published agreeably to the promise of his Son-in-law and his Executors.

The following shows the nature and extent of the Work, and the terms of publication.

It consists of Forty Plates, all large but three, and several of great magnitude, forming two volumes, (or in one, at the option of the purchaser,) Grand Eagle. The first contains Elevations and Perspective Views of the several Fronts of the Castle, some of them of considerable size, with the requisite Plans.

The second contains Elevations of the various Parts of the Castle, on a larger scale.

The Plates are accompanied by a full *Description* of them.

Also an *Historical Essay*, so far as relates to the structure of the Castle, from its foundation to the present time, by AMBROSE POYNTER, Esq.; illustrated by other Plates and by Wood-Cuts, chiefly showing the former state of the Castle.

The Work was published in three Parts; the first issued in May, 1840, the second in October, and the concluding Part in June, 1841.

Proofs on India Paper, £4. 14*s*. 6*d*. each Part. Prints, £2. 12*s*. 6*d*. each Part.

For a work of this magnitude, produced at a great cost, the terms of publication are extremely moderate; but Sir Jeffry was desirous only, first, of obeying the commands of his Sovereign, and then of fulfilling his own inclinations, by producing for the gratification of the British Public a magnificent Illustration of this truly Royal Palace, to the new construction and improvement of which so many years of his active life had been devoted.

It is edited (at the request of Sir J. Wyatville's Son-in-law and of his Executors) by HENRY ASHTON, Esq., Architect, who, on Sir Jeffry's resignation, was appointed to succeed him in superintending the works in progress at the Castle.

LIST OF THE PLATES.

VOL. I.

1. The Victoria Tower, *on the Title-page*.
2. North-East View of the Wykeham or Winchester Tower.
3. General Plan.
4. The South Front.
5. The East Front.
6. The North Side.
7. The West Front of the Upper Ward.
8. The South Side of the Upper Ward.
9. Section from North to South through the Upper Ward.
10. North Side of the Upper Ward.
11. Plan of the Ground Story of the Upper Ward.
12. Plan of the Principal Story of the Upper Ward.
13. View of the South and East Sides.
14. North-East View.
15. North-West View.
16. South-West View.
17. A View of the Upper Ward, (looking East.)
18. A View of the Upper Ward, (looking West.)
19. View of the Riding House and Stables.

VOL. II.

1. North-West View of the Winchester Tower, *Title-page*.
2. King George the Fourth's Gateway.
3. The Victoria Tower.
4. The East Front of the Victoria Tower.
5. The Clarence Tower.
6. The Chester Tower.
7. The Prince of Wales's Tower.
8. The Brunswick Tower.
9. The Cornwall Tower.
10. George the Fourth's Tower.
11. The Winchester Tower.
12. Henry the Third's Tower.
13. King Edward the Third's Tower.
14. The Round Tower.
15. The Inner Side of George the Fourth's Gateway.
16. The Sovereign's Entrance to the Private Apartments.
17. The Kitchen Court Gateway.
18. The State Entrance Tower.
19. Queen Elizabeth's Gallery and Henry the Seventh's Building.
20. King John's Tower.
21. St. George's Gate and Edward the Third's Tower.

PLATES WITH THE LETTER-PRESS.

Norden's View, *at the head of the Essay*.
Sir Christopher Wren's plan for improving the Castle, *in the Essay*.
The South, East, and North Fronts, as in the year 1824. *Do.*
The West Front, and the South and North Sides of the Court of the Upper Ward, as in the year 1824. *Do.*
View in the Riding House, *at the head of Description of Plates, Vol. I.*

WOOD-CUTS INTERSPERSED WITH THE LETTER-PRESS.

The Queen's Arms, *on the Dedication*.
Norman Fragments.
Doorway in the Devil Tower.
Part of the Dean's Cloister, and Capitals of Columns.
A Piscina and a Corbel with a head, set. Edward the Third.
Plan of the principal floor of Windsor Castle, as in the year 1824.
View of the Castle Hill in 1824.
Vignette: View of part of the Castle, *tail-piece to Description of Plates, Vol. II.*

Sold also, 2 vols. in 1, very neat in cloth boards and lettered, Price £8. 8*s*., or elegant in half-morocco, gilt, Price £8. 18*s*. 6*d*.

Digitized by Google

3.

In large 4to., very neat half-morocco, gilt tops, Price 18*s.*

STUDIES OF MODERN ENGLISH ARCHITECTURE.

THE TRAVELLERS' CLUB-HOUSE.

By CHARLES BARRY, Architect.

Illustrated by Engravings of Plans, Sections, Elevations, and Details, by J. H. Le Keux.

With an Essay, including a Description of the Building, by Mr. W. H. LEEDS.

*** This volume, complete in itself, is proposed as the first of a series under the general title of "The Modern School of English Architecture."

'The Plates, engraved by J. H. Le Keux, from the Drawings of Mr. Hewitt, are examples of perfection in this species of art. We do not believe that any artists that ever lived could carry it further. They will afford exemplars both to architectural draughtsmen and engravers, as well as to architects themselves; and will go down to posterity as the remains of Grecian architecture have descended to us.

'The author before us seems to be exactly the sort of commentator to grapple with doubts and conflicting opinions, since he is not hampered with school prejudices and conventionalities; but combines fresh thoughts and sound reflections on his subject with good taste and elegant diction.'—*Probe*, No. 13.

LIST OF PLATES.

1. Ground plan of the building.
2. Principal plan.
3. Elevation of the front.
4. Elevation of the back front.
5. Longitudinal section through A to B.
6. Longitudinal section through C to D.
7. Details of the principal front: Windows, ground floor, section of cornice, section of window head, section of under part of window, section of ornament in string course, elevation of console, balustrade to area front.
8. Details of the principal front: Section of principal cornice, elevation of cornice, plaster cap and entablature to window, elevation of one-pair window, elevation of cornice, &c.
9. Details of rear front: Elevation of one-pair window, section of window head, elevation of block, elevation of cornice, section of principal cornice, section of window cornice, &c.
10. Details of drawing: Plan of ceiling, bead, section of cove of ceiling, enriched panel of ceiling, section of cornice, chimney-piece, &c.

4.

One large 4to. The Plates engraved in the finest style of Art. Cloth boards, lettered, Price £1. 10*s.*

THE MONUMENTAL REMAINS OF NOBLE AND EMINENT PERSONS,

Comprising the Sepulchral Antiquities of Great Britain, engraved from Drawings by

EDWARD BLORE, Architect, F.S.A.

With Historical and Biographical Illustrations.

CONTENTS.

1. Eleanor, Queen of Edward the First. *Westminster Abbey.*—1290.
2. Effigy of the same.
3. Brian Fitzalan, Baron of Bedale. *Bedale Church.*—1301.
4. Aymer de Valence, Earl of Pembroke. *Westminster Abbey.*—1324.
5. Sir James Douglas. *Douglas Church.*—1331.
6. Gervase Alard, Admiral of the Cinque Ports. *Winchelsea Church.*—No date.
7. Philippa, Queen of Edward the Third. *Westminster Abbey.*—1369.
8. Effigy of the same.
9. Thomas Beauchamp, Earl of Warwick. *Beauchamp Chapel, Warwick.*—1370.
10. Edward, Prince of Wales. *Canterbury Cathedral.*—1376.
11. Effigy of the same.
12. King Edward the Third. *Westminster Abbey.*—1377.
13. Effigy of the same.
14. Thomas Hatfield, Bishop of Durham. *Durham Cathedral.*—1381.
15. William of Wykham, Bishop of Winchester. *Winchester Cathedral.*—1404.
16. Effigy of the same.
17. John Gower. *St. Saviour's Church, Southwark.*—1408.
18. King Henry the Fourth and his Queen. *Canterbury Cathedral.*—1412.
19. Effigy of the same.
20. Thomas Fitzalan, Earl of Arundel. *Arundel Church.*—1415.
21. Ralph Neville, Earl of Westmorland. *Staindrop Church.*—1425.
22. Archibald, 5th Earl of Douglas. *Douglas Church.*—1438.
23. Richard Beauchamp, Earl of Warwick. *Beauchamp Chapel, Warwick.*—1439.
24. Effigy of the same.
25. John Beaufort, Duke of Somerset. *Wimborn Minster.* 1444.
26. Humphrey, Duke of Gloucester. *St. Alban's Abbey.*—1446.
27. Sir John Spencer. *Brington Church.*—1522.
28. Archbishops Warham and Peckham. *Canterbury Cathedral.*—1532.
29. Margaret Plantagenet, Countess of Salisbury. *Christ's Church, Hampshire.*—1541.
30. Sir Anthony Browne. *Battle Abbey.*—1548.

Digitized by Google

5.

On a scale of 25 feet to an inch, plain paper, £1. 1*s.*; Indian paper, £1. 11*s.* 6*d.*

LONDON BRIDGE;

A large steel Plate, 3 feet 6 inches by 2 feet, containing

Plan and Elevation of this great National Work, with the very interesting reference of dimensions, materials, time, and cost.

Engraved in the best style, and elaborately finished by J. W. Lowry, under the direction of B. ALBANO, Esq., M.Inst.C.E., and from his Original Drawing, presented to the

Institution of Civil Engineers, 1839.

Made from Original Drawings and Admeasurements on the Works.

Constructed by Sir JOHN RENNIE, C.E., F.R.S.

This splended Engraving, upon which much time has been expended to obtain the greatest accuracy, is submitted to the Civil Engineer and Architect, as an example of a work so intimately connected with their professional engagement, and to the amateur as a monument of British Art.

Sold in Frames, glazed with the best glass for an Office, and which may also be appropriated as an attractive object for the Library or Parlour of a Nobleman or Gentleman's Mansion.

6.

In Imperial 4to., to be completed in 2 Parts,

A SERIES OF ORIGINAL DESIGNS FOR CHURCHES AND CHAPELS

In the Anglo-Norman, Early English, Decorative English, and Perpendicular English, Styles of Ecclesiastical Architecture; including also, Designs for Rectory Houses and Schools, in the Tudor and Domestic Styles.

By FREDERICK J. FRANCIS, Architect, Author of "A Brief Survey of Physical and Fossil Geology," and "The Fine Arts of Greece during the Age of Pericles."

The First Part, Price £1. 10*s.*, is ready, and contains about 50 Illustrations, comprising plans, geometrical elevations, and perspective views: to which are appended, full practical descriptions respecting the materials to be employed, and the probable expense of the erection of each design. Gentlemen willing to become Subscribers to the complete work are requested to send their names.

The Work which the Author now offers to the Public is the result of several years' diligent study of the principles and practice of Pointed Ecclesiastical Architecture. The attainment of professional advancement has been his chief motive in engaging upon it: added to which he conceives, that at the present time, when the increasing demands for Church Extension render Church Building an important branch of an Architect's duties, such a work would be likely to prove useful to the professional man. During its progress he has been encouraged by the flattering testimonials of approbation he has received from those whose opinions, being founded on deep study and extensive experience of the principles of Art, he values most highly; and he hopes, that when completed, it will be found to merit the notice and patronage, not only of the profession itself, but also of those upon whose taste and liberality the true exaltation of this noble branch of Art depends.

7.

VITRUVIUS BRITANNICUS.

Containing 12 fine Plates, with Text, in a neat portfolio, Price in Columbier folio £3. 3*s.*; some copies of India proofs, Price £5. 5*s.*

HISTORY, ANTIQUITIES, AND ARCHITECTURE OF CASTLE ASHBY,

The Seat of the Most Noble the Marquis of Northampton, President of the Royal Society.

Illustrated by Plans, Elevations, and Internal Views of the Apartments from actual Measurement.

By P. F. ROBINSON, Architect, V.P.I.B.A., F.S.A., &c.

Digitized by Google

8.

ST. STEPHEN'S CHAPEL, WESTMINSTER.

In 1 large Atlas folio volume, with several very fine Plates, executed from the elaborate Drawings of Mr. FREDERICK MACKENZIE, Price £4. 4*s*., entitled

THE ARCHITECTURAL ANTIQUITIES AND RESTORATION OF ST. STEPHEN'S CHAPEL, WESTMINSTER,

(LATE THE HOUSE OF COMMONS.)

Drawn and Engraved from Admeasurements and Surveys by special command, and at the expense of Her Majesty's Government; accompanied by an interesting Memoir, relating to the original and perfect state of the Building, grounded upon the best authorities.

By Mr. FREDERICK MACKENZIE.

Mr. Mackenzie's talented Services as an artist, and his research as an antiquary on the subject of the Gothic Style of Architecture in this country, of which St. Stephen's is one of the finest examples, was secured by the Office of Woods and Works soon after the Fire; since which much thought, time, and labour have been devoted to its perfect developement. Government have most liberally come forward, at a great expense, to secure to the country a well authenticated and illustrative example of this Renowned Edifice.

9.

In 8vo., Price 2*s*. 6*d*.

MANUAL OF REFERENCE TO THE ARCHITECT AND ENGINEER.

A CATALOGUE OF BOOKS on the Subjects of ARCHITECTURE; ENGINEERING, Civil, Military, and Mechanical; NAVAL ARCHITECTURE; and the Arts and Manufactures of the Country. Classed, with an Index of the names of Authors, &c.

By JOHN WEALE.

10.

Second Edition in 8vo., extra cloth boards, 10 Plates, Price 7*s*. 6*d*.

PERSPECTIVE SIMPLIFIED;

Containing a new PRELIMINARY CHAPTER, in which the subject is treated in the most plain and easy manner, for the convenience of readers not acquainted with Geometry.

By Z. LAURENCE, Esq.

11.

In 4to., with Wood-cuts, and 4 fine Engravings by JOHN LE KEUX, Price 7*s*. 6*d*.

AN ACCOUNT OF THE ROOF OF KING'S COLLEGE CHAPEL, CAMBRIDGE.

By F. MACKENZIE, Author and Draughtsman of some of the finest Architectural Works.

12.

4to., Price £1. 1*s*. Revised and corrected.

THE CARPENTER AND JOINER'S ASSISTANT.

Containing Practical Rules for making all kinds of Joints, and various methods of hingeing them together; for hanging of Doors; for fitting up Windows and Shutters; for the construction of Floors, Partitions, Soffits, Groins, Arches for Masonry; for constructing Roofs in the best manner from a given quantity of Timber, &c. Also Extracts from M. Belidor, M. du Hamel, M. de Buffon, &c., on the Strength of Timber. Illustrated with 79 Plates.

By PETER NICHOLSON, Architect.

Digitized by Google

13.

DOMESTIC ARCHITECTURE.

In large 4to., with 19 fine Engravings, Price £1. 1*s.* extra cloth boards, or on large paper, proof impressions, Price £1. 11*s.* 6*d.*

ARCHITECTURA DOMESTICA.

By A. DE CHATEAUNEUF, Architect, of Hamburgh.

Being a Series of very tasty examples of Interiors and Exteriors of Residences of the Gentry erected in Hamburgh and its neighbourhood; principally in the Italian Style, with Ornamental Pleasure Grounds, Verandas, detached Cottages, &c., &c.

LIST OF PLATES.

1. Seat in the park at Ham of Charles Sieveking, Esq., Syndic of the city of Hamburgh; also, Cottage of Cæsar Godefroy, Esq.
2. Gardner's Lodge of wood, orangery, &c., near Lubeck.
3. Dwelling House in Ham Park, with Grecian interior, and plan.
4. Details, veranda, &c.
5. Saloon, with wood ornaments and fittings.
6. Plan of house and grounds, and view of Dr. Buchholtz's House, near Lubeck.
7. & 8. Plans and elevations of Houses, with sections, in the Italian style, erected on the basin of Alster.
9. Club House in the Farnesian style, with plan, and an interior section.
10. Monuments of the families of Sieveking and Nolting, in the new church-yard near Lubeck.
11. to 18. The House of Dr. Augustus Abendroth. "The arrangement of this house, as the residence of a wealthy family, which, on occasion of great festivities, desires to display a noble magnificence, will be easily understood by the plans, sections, and details."

    The illustrations consist of plans of ground and principal story, terraces, &c.; Plans, out-houses, and offices, decorative ceilings, grand façade, longitudinal section, details of windows, consoles, &c.; Grand marble decorative staircase, grand fresco and statue hall, &c.
19. Grand entrance porch, door, &c.

Mr. Chateauneuf, in conjunction with Mr. Mee, was one of the successful competitors of the New Royal Exchange Designs.

14.

In 8vo., Price 1*s.*

THOUGHTS ON THE ABUSES OF THE PRESENT SYSTEM OF COMPETITION IN ARCHITECTURE,

With an outline of a plan for their remedy.

In a Letter to Earl de Grey, President of the Royal Institute of British Architects.

By HENRY AUSTIN.

15.

Engraved in aquatinta and coloured, 38 Plates. Quarto. Price £1. 4*s.*

ARCHITECTURAL SKETCHES FOR COTTAGES, RURAL DWELLINGS, AND VILLAS;

With Plans, suitable to persons of genteel life and moderate fortune, proper for Picturesque Buildings.

By R. LUGAR, Architect.

16.

In 8vo., with Plates, extra cloth boards, Price 10*s.* 6*d.*

CEMENTS.

A PRACTICAL and SCIENTIFIC TREATISE on the Choice and Preparation of the Materials for, and the Manufacture and Application of, Calcareous Mortars and Cements, Artificial and Natural, founded on an Extensive Series of Original Experiments. By M. L. J. Vicat, Chief Engineer of Roads, &c. Translated from the French, with numerous and valuable Additions, and Explanatory Notes, comprehending the most important known Facts in this Science, and with additional new Experiments and Remarks.

By Captain J. T. SMITH, Madras Engineers.

Digitized by Google

17.

Third Edition, with 28 additional Plates, Edited by PETER BARLOW, Esq., F.R.S., M.I.C.E., in extra half-morocco, Price £2. 2s.

ELEMENTARY PRINCIPLES OF CARPENTRY, AND ON CONSTRUCTION,—WITH SUPPLEMENT.

A Treatise on the Pressure and Equilibrium of Beams and Timber Frames, the Resistance of Timbers, and the Construction of Floors, Roofs, Centres, Bridges, &c.; with Practical Rules and Examples. To which is added, an Essay on the Nature and Properties of Timber; including the methods of Seasoning, and the causes and Prevention of Decay; with Descriptions of the Kinds of Wood used in Building: also numerous Tables of Scantlings of Timber for different purposes, the Specific Gravities of Materials, &c. Illustrated by 50 Engravings.

By THOMAS TREDGOLD, Civil Engineer.

18.

In Quarto, 28 fine Plates, Price £1. 1s.

SUPPLEMENT TO

TREDGOLD'S ELEMENTARY PRINCIPLES OF CARPENTRY, AND ON CONSTRUCTION.

Sold separately for the convenience of those possessing the former Edition.

Comprising Engravings of Iron and Timber Roofs of Italian Palaces, Churches, Theatres, &c.; of a Juvenile Prison, Pantheon Bazaar, &c., &c., by Mr. SYDNEY SMIRKE; Iron and Timber Roof, &c., of Christ's Hospital and St. Dunstan's in the West, by Mr. JOHN SHAW; Timber Roofs of White Conduit House Tavern and others, by Mr. DUNCAN; Iron and Timber Construction of Croydon Railway Station, by Mr. Jos. GIBBS; Iron and Timber Roofs of the Trent Water-works, Nottingham, and the Roofs of the Model Room, the Smithery, and Engine Manufactory, at Butterley, by Mr. Jos. GLYNN; with Mr. MACKENZIE's elaborate Drawings of the Construction of King's College Chapel, Cambridge. The whole described by the different Contributors, and edited by Mr. BARLOW.

19.

In demy 8vo., with 107 Wood-cuts, extra cloth boards, Price 7s.

EXPERIMENTAL ESSAYS ON THE PRINCIPLES OF CONSTRUCTION IN ARCHES, PIERS, BUTTRESSES, &c.

Made with a view to their being useful to the Practical Builder.

By W. BLAND, Esq., of Hartlip, Kent.

20.

8vo., with Plates, Price 7s.

VENTILATION, WARMING, AND TRANSMISSION OF SOUND.

REPORT OF THE COMMITTEE OF THE HOUSE OF COMMONS ON VENTILATION, WARMING, AND TRANSMISSION OF SOUND.

Abbreviated, with Notes. By W. S. INMAN, Architect, F.I.B.A.

21.

In 8vo., illustrated with a very fine Frontispiece of ST. PAUL'S CATHEDRAL, by GLADWIN. Extra cloth boards, Price 10s. 6d.

THE PROFESSIONAL PRACTICE OF ARCHITECTS AND THAT OF MEASURING SURVEYORS,

And Reference to BUILDERS, &c., &c., from the time of the celebrated EARL OF BURLINGTON.

By JAMES NOBLE, Architect, F.I.B.A.

Digitized by Google

22.

In Imperial 4to., with 50 fine Engravings and 2 fine Wood-cuts of the past and present Entrances at Hyde Park Corner, suggested for insertion, and the Drawings contributed by DECIMUS BURTON, Esq. Half bound in morocco, Price £2. 8s.

DESIGNS OF ORNAMENTAL GATES, LODGES, PALISADING, AND IRON WORK OF THE ROYAL PARKS,

With some other Designs equal in utility and taste, intended for those designing and making Parks, Terraces, Pleasure-walks, Recreative grounds, &c.; principally taken from the executed works of Decimus Burton, Architect, John Nash, Architect, Sydney Smirke, Architect, Sir John Soane, Architect, Robert Stevenson, C. E., Sir John Vanbrugh, Architect, and Sir Christopher Wren, Architect.

THE FOLLOWING IS A LIST OF THE SUBJECTS.

1. Gates to the Royal Entrance to St. James's Park.
2. Compartment of ditto, enlarged.
3. Plan of St. James's Park.
4. Plan of Hyde Park.
5. Plan of Regent's Park.
6. Marble Arch, Buckingham Palace, plan and elevation.
7. Pimlico Lodge of ditto, plan and elevation.
8. Colonnade, Hyde Park, entrance from Piccadilly, plan and elevation.
9. Entrance of the Green Park, Piccadilly, front and side elevations and plan.
10. Hyde Park Lodge, front and side elevations and plan.
11. Humane Society Receiving House, plan and elevation.
12. Grosvenor Lodge, front and side elevations and plan.
13. Stanhope Lodge, front and side elevations and plan.
14. Cumberland Lodge, front and side elevations and plan.
15. Gloucester Lodge, elevation and plan.
16. Hanover Lodge, elevation and plan.
17. Lamp at Hyde Park Corner, with the details.
18. Gates centre of Colonnade, Hyde Park.
19. Details of ditto, quarter full size.
20. Railing at the head of the Serpentine River, Dwarf Gates to Royal Entrance, Dwarf Railing to Lodge, Hyde Park.
21. Stanhope Gate Rails, Hyde Park.
22. Cumberland Gate Rails, Hyde Park.
23. Parts and Details of preceding.
24. Railing, Park Square, Regent's Park.
25. York Gates Railing, Regent's Park.
26. Railing, York Terrace, ditto.
27. Railing, Chester Terrace, ditto.
28. Railing to Cambridge and Gloucester Terraces, ditto.
29. Foot-gate and half of Carriage-gate, Cambridge Place, ditto.
30. Railing, Gloucester Gate, ditto.
31. Railing, Clarence Gate, ditto.
32. Ditto, ditto, ditto.
33. Railing, Hanover Gates, ditto.
34. Railing, Sussex Terrace, ditto.
35. Railing, Hanover Terrace, ditto.
36. Lamp and Railing, Chelsea Hospital.
37. Parts of Iron Work ditto, to a larger scale.
38. Gates, Hampton Court, (Sir C. Wren.)
39. Ditto, ditto, ditto.
40. Parts of Iron Work, ditto, ditto.
41. Iron Work of King's Staircase, ditto.
42. Iron Work of Queen's Staircase, ditto.
43. Plan and Elevation of Entrance Lodges and Iron Gates at Greenwich, (Sir C. Wren.)
44. Ditto, ditto, larger scale.
45. Iron Gates at Gunnersbury Park.
46. Plan, Elevation, and Details of ditto.
47. Old Buckingham Palace Entrance, Iron Gates in 1737.
48. Lamp, Stirling Castle.
49 & 50. Elevations of Gates and Palisading at the Palace of the Grand Sultan at Constantinople.

The whole accurately and tastefully engraved on steel, being made applicable as working drawings, and as examples of a superior style.

23.

8vo., with Plates, Price 7s.

COTTAGES AND HOUSES FOR THE PEASANTRY AND EMIGRANTS.

ELEMENTARY AND PRACTICAL INSTRUCTIONS ON THE ART OF BUILDING COTTAGES AND HOUSES FOR THE HUMBLER CLASSES.

An Easy Method of Constructing Earthen Walls, adapted to the Erection of Dwelling-houses, Agricultural, and other Buildings, surpassing those built of Timber in comfort and stability, and equalling those built of Brick, and at a considerable saving. To which are added, Practical Treatises on the Manufacture of Bricks and Lime; on the Arts of Digging Wells and Draining; Rearing and Managing a Vegetable Garden; Management of Stock, &c. For the use of Emigrants; for the better Lodging of the Peasantry of Great Britain and Ireland; and the Improvement of those Districts to which the benevolence of Landed Proprietors is directed.

By WILLIAM WILDS, Surveyor.

The work contains:—

CHAP. I. The Art of Constructing Houses and Cottages with Earthen Walls made easy, being intelligible to all classes, and to the most ignorant in building, with Wood-cuts of tools, plans and sections, &c.

II. On Bricks, how they are to be advantageously applied in conjunction with rammed earth; rules for selecting the best earth, &c.

III. On the Manufacture and Choice of Bricks.

IV. On the Properties, Uses, and Manufacture of Lime.

V. On Well-digging, Draining, Well-sinking, &c.; on Fuel, on Gardening; what quantity of Land will keep a Family in culinary Vegetables; Pork, Eggs, Milk, and Bread Corn; on the Keeping of Cows, Hogs, Poultry, Bees, and Art of making of Candles, Soap, Storing Fruit, Roots, &c.

Digitized by Google

24.

Very neatly half-bound in morocco, gilt tops, Price £3. 3*s*.

ARCHITECTURE OF THE METROPOLIS.

DEDICATED TO SYDNEY SMIRKE, ESQ., ARCHITECT, F.S.A., F.G.S.

A New and considerably Enlarged Edition, with many Additional Subjects and Plates, of

ILLUSTRATIONS OF THE PUBLIC BUILDINGS OF LONDON,

In Two Volumes 8vo., with 165 Engravings, originally edited by the late AUGUSTUS PUGIN, Architect, and JOHN BRITTON, F.S.A., &c., and now newly Edited and Enlarged

By W. H. LEEDS.

Manifold as are the publications which represent the various structures of the metropolis, this is the only work which describes them, not *ad libitum*, in views which, even when perfectly correct, show no more than the general aspect and locality of each building from a certain point, and consequently afford no information beyond mere external appearance—but exhibits them *architecturally* by means of plans, elevations, and occasionally both sections and interior perspective views. Thus a far more complete and correct knowledge may be obtained of each edifice, in its entire arrangement in all its parts and dimensions, than by pictorial views of them.

As studies for the Architect, the subjects contained in these volumes strongly recommend themselves,—more particularly so, as of the majority of them no plans and elevations are to be met with in any other publication, which materially enhances the interest of this collection, and it preserves to us authentic and tolerably complete records of many buildings which no longer exist. Among these are CARLTON HOUSE, illustrated with several Plates, including sections, and a plan of the private apartments; the late ENGLISH OPERA HOUSE; MR. NASH'S GALLERY, which has since been dismantled of its embellishments; and THE ROYAL EXCHANGE.

Among the subjects introduced in this New Edition will be found the following:—The TRAVELLERS' CLUB HOUSE—LONDON UNIVERSITY—ST. GEORGE'S HOSPITAL—GATEWAY, Green Park—POST OFFICE—FISHMONGERS' HALL—ST. DUNSTAN'S, Fleet Street, &c., &c.

25.

Royal 8vo., 18 Engravings, cloth boards, Price 10*s*. 6*d*.

ILLUSTRATIONS OF THE PUBLIC BUILDINGS OF LONDON,

With descriptive Accounts of each Edifice.

SUPPLEMENT:

Containing the NEW SUBJECTS, and DESCRIPTIONS by W. H. LEEDS, incorporated in the second edition, and now sold separate for the accommodation of those possessing the first edition.

Also a few copies in Imperial 8vo. for large paper copies of the first edition, Price 15*s*.

26.

In demy 8vo., cloth boards, Price 9*s*.

A TREATISE ON THE LAW OF DILAPIDATIONS AND NUISANCES.

By DAVID GIBBONS, Esq., of the Middle Temple, Special Pleader.

Dedicated to the Honourable Sir John Taylor Coleridge, Knt., one of her Majesty's Justices of the Court of Queen's Bench.

27.

Wood-cuts, 8vo. Price 4*s*. 6*d*.

AN ESSAY ON THE CONSTRUCTION OF THE FIVE ARCHITECTURAL SECTIONS OF CAST-IRON BEAMS,

Employed as Girders, Bressummers, and other Horizontal Supports for Buildings, &c.

By WILLIAM TURNBULL.

Digitized by Google

28.

Le prix de chaque livraison de 6 feuilles sur colombier ordinaire est de 6 shillings—sur colombier vélin, de 10 shillings.

EDIFICES DE ROME MODERNE,

DESSINES, MESURES, ET PUBLIES PAR P. LETAROUILLY, ARCHITECTE.

Parmi les villes modernes, Rome, considérée sous le rapport de son architecture, mérite sans contredit, d'être placée au premier rang. Depuis près de quatre siècles elle n'a cessé de s'enrichir d'édifices de tous genres, souvent construits sous la direction des architectes les plus célèbres, de sorte qu'on y trouve aujourd'hui la plus belle comme la plus nombreuse réunion de monuments.

Rien ne serait plus profitable pour l'étude que la réproduction par la gravure de tant de chef-d'œuvres; car il est incontestable que les exemples, surtout exprimés par des figures, pénètrent mieux dans la pensée que des théories abstraites, et qu'ils y laissent une impression plus profonde et plus durable. Un recueil qui mettrait ainsi à la portée de tout le monde un si grande nombre de beaux modèles serait d'un prix infini pour tous. Le maître comme l'élève y puiserait des enseignements précieux, et dans la *pratique* de l'art il pourrait être d'un usage continuel.

Cet ouvrage vient d'être exécuté et nous nous empressons de l'annoncer. Il offre une riche collection de plans, de façades et de détails: on y trouve reproduits avec une précision remarquable et une grande fidélité dans les mesures, les œuvres admirables des maîtres illustres de la renaissance qui ont été si bien inspirés par les monuments antiques qu'ils avaient sous les yeux et qu'ils consultaient sans cesse.

L'auteur devait borner sa publication à la partie qui est aujourd'hui achevée, laquelle se compose d'un volume in folio de 115 planches, du plan général de la ville et d'un volume de texte in quarto:

et dont le prix est de £6. 6*s*.—avec demi relieure £6. 16*s*. 6*d*.

Mais les encouragements qu'il a obtenu l'ont déterminé à entreprendre un second voyage à Rome pour y compléter son travail. Déjà même 5 livraisons de ce complément sont en vente. On trouvera dans cette seconde partie des monuments du plus haut intérêt et la plupart placés au premier rang dans l'opinion des artistes: il suffira de citer les palais Farnese, Girand, du Vatican, Negroni, Corsini, Sciarra Barberini . . . . . puis de belles Eglises, des Cloîtres, des Fontaines et plusieurs Villa.

Parts 19 and 20, to complete the many sets of 18 livraisons sold in England, to be had separately.

29.

DU MEME AUTEUR,

Prix, sur vélin 10 shillings, sur chine 12 shillings.

PLAN DE ROME MODERNE,

AVEC L'INDICATION DES MONUMENTS ANTIQUES.

Cette gravure, terminée au burin et ornée de groupes de monuments et de figures allégoriques, peut servir à décorer le cabinet des architectes et des ingénieurs, aussi bien que la bibliothèque des savans et des hommes de lettres.

30.

16 Plates, large 4to., Price 16*s*.

DESIGNS FOR RURAL CHURCHES.

By GEORGE E. HAMILTON, Architect.

31.

The Sixth Edition, Price 18*s*. bound.

THE PRACTICAL HOUSE CARPENTER, OR YOUTH'S INSTRUCTOR;

Containing a great variety of useful Designs in Carpentry and Architecture; as Centering for Groins, Niches, &c.; Examples for Roofs, Skylights, &c.; Designs for Chimney-pieces, Shop Fronts, Door Cases; Section of a Dining-Room and Library; variety of Staircases, with many other important Articles and useful Embellishments. The whole illustrated and made perfectly easy by 148 4to. Copper-plates, with Explanations to each.

By WILLIAM PAIN.

Digitized by Google

32.

With Plates, Imperial 8vo., cloth boards, £1. 1*s.*

CLARKE'S ELIZABETHAN ARCHITECTURE.

CONTENTS.

Wimbledon House, Surrey, built by Sir Thomas Cecil, 1588.
Easton House, Essex, Sir Henry Maynard.
Aston Hall, Warwickshire, Sir Thomas Holt.
Grafton Hall, Cheshire, Sir Peter Warburton.
Stanfield Hall, Norfolk, family of Flowerdews.
Seckford Hall, Thomas Seckford.
Bramshill House, Hampshire.
Fenn Place, Kent, Lord Zouch.
Queen's Head, Islington, Sir Walter Raleigh.
Chasleton, Oxfordshire, Walter Jones.
Brereton Hall, Cheshire, Sir Walter Brereton.
Holland House, Middlesex, Sir Walter Cope.
Haughley House, Suffolk.
Streete Place, Sussex, Dobell.
Montacute House, Somersetshire, Sir Edward Philips.
Westwood House, Worcestershire.
Wakehurst Place, Sussex, Sir Edward Culpeper.
Carter's Corner, Sussex.
Eastbury House, Essex, Lord Monteagle.
East Mascall, Sussex, Newton.
Old House, near Worcester, &c.

33.

Sixty Plates, Title-page printed in colours and gold, elegantly half-bound in morocco, and lettered, Price £1. 16*s.*

SPECIMENS OF THE ARCHITECTURE OF THE REIGNS OF QUEEN ELIZABETH AND KING JAMES I.,

From Drawings by Charles James Richardson, George Moore, and other Architects, with Observations and Descriptions of the Plates.

Eighteen Plates illustrate the Old Manor House, the Gardens, Terraces, &c., at Claverton, the Seat of George Vivian, Esq.—six the Duke of Kingston's Picturesque House at Bradford—and eight the princely Mansion of Lord Holland at Kensington.

The volume contains examples of Ceilings, Porches, Balustrades, Screens, Staircases, Monuments, Pulpits, &c.; and a rich collection of Facsimiles of Old English Drawings, chiefly of John Thorpe, the most eminent Artist in Queen Elizabeth's time.

34.

Supplementary and Fifth Volume to the Antiquities of Athens, by R. C. Cockerell, Esq., &c.

ANTIQUITIES OF ATHENS AND OTHER PLACES OF GREECE, SICILY, &c.

Supplementary to the Antiquities in Athens, by JAMES STUART, F.R.S., F.S.A., and NICHOLAS REVETT; delineated and illustrated by R. C. Cockerell, R.A., F.S.A., W. Kinnard, T. L. Donaldson, Member of the Institute of Paris, W. Jenkins, and W. Railton, Architects.

Imperial folio, uniform with the Original Edition of Stuart and Revett, and the Dilettanti Works. Very finely printed, and with numerous beautiful Plates of Plans, Elevations, Sections, Views, Ornaments, &c. In extra cloth boards and lettered, Price £6. 12*s.*

35.

12mo., Price 3*s.* 6*d.*

A MANUAL OF THE LAW OF FIXTURES.

By DAVID GIBBONS, Esq., of the Middle Temple, Special Pleader.

*** A work purposely written for the use of Builders, House Agents, and House and Land Proprietors.

36.

Price 2*s.* 6*d.*, pocket size, boards.

THE BUILDING ACT (at Large), side References.

With Extracts from the Sweeps' Acts; and with Explanatory Notes and Cases.

By A. AINGER, Architect.

Digitized by Google

37.

Second Edition, 4to., Price £1. 1*s.*

DESIGNS FOR VILLAS AND OTHER RURAL BUILDINGS.

By the late EDMUND AIKIN, Architect.

Engraved on 31 Plates, with Plans and Elevations, coloured, and an Introductory Essay, containing Remarks on the prevailing Defects of Modern Architecture, and on the Investigation of the Style best adapted for the Dwellings of the Present Times. Dedicated to the late Thomas Hope, Esq.

'Modern Architects profess to imitate antique examples, and do so in columns, entablatures, and details, but never in the general effect. Is it that they imitate blindly, and without penetrating into those principles and that system which is superior to the details that guide them? This is a subject which it may be useful and interesting to pursue.' —Vide Introduction.

38.

In 4to. Plates, very neatly coloured, cloth boards and lettered, Price 16*s.*

A SERIES OF DESIGNS FOR VILLAS AND COUNTRY HOUSES,

Adapted with Economy to the Comforts and to the Elegances of Modern Life, with Plans and Explanations to each.

By C. A. BUSBY, Architect.

39.

A new Edition in the Press, with 78 very fine Plates, royal folio, neat in cloth boards and lettered, Price £3. 3*s.*

THE UNEDITED ANTIQUITIES OF ATTICA.

By the Society of Dilettanti. Comprising the Architectural Remains of Eleusis, Rhamnus, Sunium, and Thoricus.

40.

In 4to., with 5 Plates, in boards, Price 10*s.* 6*d.*

OBSERVATIONS ON THE CONSTRUCTION AND FITTING UP OF MEETING HOUSES, &c., FOR PUBLIC WORSHIP;

Illustrated by Plans, Sections, and Descriptions, including one erected in the City of York; embracing, in particular, the METHOD of WARMING and VENTILATING.

By Mr. ALEXANDER, of York.

*** *This work is quoted and recommended by Tredgold in his work on a similar subject.*

41.

In small 8vo., for a Pocket-Book. A New Edition, with the Government Tables of Annuities. Price 7*s.* boards.

TABLES FOR THE PURCHASING OF ESTATES,

Freehold, Copyhold, or Leasehold, Annuities, &c., and for the Renewing of Leases held under Cathedral Churches, Colleges, or other Corporate Bodies, for Terms of Years certain, and for Lives; also, for valuing Reversionary Estates, Deferred Annuities, Next Presentations, &c. Together with several useful and interesting Tables connected with the subject. Also, the Five Tables of Compound Interest.

By W. INWOOD, Architect and Surveyor.

42.

2 vols. 4to., upwards of 70 Plates and Wood-cuts, Price £2. 2*s.*

LETTERS OF AN ARCHITECT FROM FRANCE, ITALY, AND GREECE;

Or, CRITICAL REMARKS on CONTINENTAL ARCHITECTURE, ANCIENT and MODERN, and on the CLASSIC ARCHITECTURE of GREECE. Written in a Series of Letters.

By JOSEPH WOODS, F.A.S., F.L.S., F.G.S., &c.

Digitized by Google

43.

Royal 4to., with Plates. Price £1. 1*s*.

PROLUSIONES ARCHITECTONICÆ;

Or, ESSAYS on Subjects connected with GRECIAN and ROMAN ARCHITECTURE. Illustrated by Forty Engravings by eminent Artists. Dedicated, by permission, to EARL GREY, K.G.

By WILLIAM WILKINS, A.M., R.A., F.R.S.,
Formerly a Senior Fellow of Caius College, in the University of Cambridge; Professor of Architecture in the Royal Academy of Arts.

44.

THE ARCHITECT AND STUDENT'S OFFICE MANUAL.

Being a condensation of different Examples of Grecian, Roman, and Gothic Architecture, from the time of Pericles to the reign of Queen Elizabeth, elaborately drawn to a conveniently large scale for immediate use and application in all the purposes of reference in the moments of office business.

The work will consist of about 24 Plates, Atlas folio; to be published in 3 Parts, Price 7*s*. 6*d*. each; showing diffused details and modes of construction as used by the ancients and moderns in the erection of their Temples, Domestic Buildings, &c., &c.

45.

A new Edition in the Press, 4to., Price £1. 1*s*. Corrected and enlarged.

THE CARPENTER'S NEW GUIDE.

Being a complete Book of Lines for Carpentry and Joinery, treating fully on Practical Geometry, Soffits, Brick and Plaster Groins, Niches of every description, Skylights, Lines for Roofs and Domes; with a great variety of Designs for Roofs, Trussed Girders, Floors, Domes, Bridges, &c. Copper-plates: including some Observations and Calculations on the Strength of Timber.

By P. NICHOLSON.

46.

In the Press, 4th Edition, improved and enlarged, edited by EATON HODGKINSON, Esq., of Manchester.

A PRACTICAL ESSAY ON THE STRENGTH OF CAST IRON AND OTHER METALS;

Intended for the Assistance of Engineers, Iron-Masters, Millwrights, Architects, Founders, Smiths, and others engaged in the Construction of Machines, Buildings, &c. Containing Practical Rules, Tables, and Examples, founded on a Series of new Experiments; with an extensive Table of the Properties of Materials. Illustrated by Eight Plates and several Wood-cuts.

By THOMAS TREDGOLD, Civil Engineer.

47.

Gothic Architecture.

In Imperial 8vo., Price 16*s*. in extra cloth boards, and lettered.

A SERIES OF ANCIENT BAPTISMAL FONTS, NORMAN, EARLY ENGLISH, DECORATED ENGLISH, AND PERPENDICULAR ENGLISH.

Drawn by F. SIMPSON, Jun., and Engraved by R. ROBERTS.

Containing 40 very beautifully engraved Plates, in the best style of the Art, and the Text written by an accomplished and talented Gentleman, whose attainments in Architecture and as an Antiquary are well known and appreciated.

A few copies on large paper, Price £1. 8*s*.; and only three copies India proofs, with Etchings, at £2. 2*s*.

Digitized by Google

48.

MEMORIALS OF ANCIENT GERMAN GOTHIC ARCHITECTURE;

Or, the ARCHITECTURAL ANTIQUITIES OF GERMANY.

By GEORGE MOLLER, of Darmstadt, Architect to the Grand Duke of Hesse.

2 vols. folio, with 130 Plates, a Description of each Edifice, and an Essay on the Origin and Progress of Gothic Architecture, with reference to its Origin and Progress in England; in the German Language, accompanied by an English Translation.

By W. H. LEEDS.

'The Transition, or Early German, has not yet, so far as I know, received much distinct attention. Dr. Moller, however, in the course of his valuable Denkmaehler, has recently given us excellent representations of the Cathedral at Limburg, on the Lahn, which is a very admirable specimen of this kind; and has noticed the intermediate and transition place which this edifice seems to occupy in the developement of the German style.'—Whewell's Notes on German Churches, p. 25.

'Dr. Moller's work (Denkmaehler der Deutschen Baukunst) already contains excellent specimens of every style of German buildings, and offers additional interest and beauty in each new number.'—Whewell's Notes on German Churches, pp. 28, 29.

'The Church of St. Catharine, at Oppenheim, near Worms, also in part a ruin, is another fine example of this style, and has been worthily illustrated in the magnificent work of Dr. Moller.'—Whewell's Notes on German Churches, p. 113.

Several copies of Seventy-two Plates, making Vol. I., have been sold in this country: some copies of the 2nd Vol. to make up these sets can be had for £2. 12*s*. 6*d*.

49.

8vo., cloth boards, and lettered, Price 8*s*.

THE TEXT OF

MOLLER'S GERMAN GOTHIC ARCHITECTURE,

Translated. With Notes and Illustrations by W. H. LEEDS.

Separate from the folio.

50.

Ornaments.

GRECIAN ORNAMENTS.

A SERIES of EXAMPLES, in 21 Plates, of GRECIAN ORNAMENT, in royal folio, very finely Engraved from Drawings made by the most celebrated Architects. Price 15*s*.

CONTENTS OF THE WORK.

Details of the Ceiling of the Propylæa, at Eleusis.
Order of the Antæ of the Inner Vestibules, at Eleusis.
Capital of the Antæ at large, at Eleusis.
Fragments found at Eleusis.
Tiles and other Details of the Temple of Diana Propylæa, at Eleusis.
Capitals and Profile of the Temple of Nemesis, at Rhamnus.
Ornamental Moulding, Jambs, Mouldings of Interior Cornice, the Painted Mouldings of the Panels of the Lacunasia, &c., &c., of the Temple of Nemesis, at Rhamnus.
Details of the Roof, Tiling, &c., of the Temple of Nemesis, at Rhamnus.
The Chairs and Sepulchral Bas-reliefs found in the Cella of the Temple of Themis, at Rhamnus.
Athenian Sepulchral Marbles, Capitals, and Triglyphs, at Delos.
Entablature of the Order of the Peristyle and Roof, Ornaments, &c., of the Temple of Apollo Epicurus, at Bassæ.
Details of Sculptured and Painted Shafts of Columns of the Subterraneous Chamber, at Mycenæ.
Restored Elevation to the Entrance of the Subterraneous Chambers at Mycenæ, commonly called the Treasury of Atreus.
Marble Stele, in the possession of Mr. Gropius, at Athens.
Terracotta Antefixa, at Athens, and Marble Fragments from Delphi.
Pilaster Capitals from Stratonice and Halicarnassus.
Fragments from Halicarnassus, Teos, and Temple of Apollo, at Branchydæ, near Miletus.
Entasis of the Columns of the Portico of the Propylæa.
——— of the North Wing of the Propylæa.
——— of the Temple of Theseus.
——— of the Temple of Minerva, or Parthenon.
——— of the Choragic Monument of Lysicrates.
——— of the Columns of the North Portico of the Triple Temple, termed the Erechtheum.
——— of the Columns of the East Portico of that Temple.
——— of the Temple of Jupiter Panhellenius, at Ægina.
——— of the Columns of the Pronaos of the same Temple.

This work is very desirable for Sculptors, Modellers, Masons, (in designing for Monuments, Tombs, Tablets, &c.,) Builders, and Architects. Those who possess the Dilettanti work of the Unedited Antiquities of Attica, and the Supplementary Volume of Antiquities of Greece, Sicily, &c., will not need this work, as the subjects are selected from them.

Digitized by Google

51.

Tudor Architecture.

In folio size, Price £1. 1*s.* in boards.

BRIDGEN'S INTERIOR DECORATIONS, DETAILS, AND VIEWS OF SEFTON CHURCH, IN LANCASHIRE.

Erected by the Molineux family (the ancestors of the present Earl of Sefton), in the early part of the reign of Henry VIII.

The Plates (34 in number) display the beautiful Style of the Tudor Age in Details, Ornaments, Sections, and Views. Etched in a masterly style of Art.

52.

Royal folio size, bound, Price 15*s.*

MECHANICAL, CIVIL ENGINEERING, AND ARCHITECTURAL DRAWING BOOK.

A Series of Instructive Lessons for Architectural, Engineering, and Mechanical Drawing, in 30 large folio Engravings of recently constructed Works in England, with explanatory details, sectional parts, &c., with their dimensions; selected as an elementary and practical introduction to the professional student in the commencement of his career; also recommendatory for tuition at the Architectural and Engineering Classes at King's College, London, College for Civil Engineers, Durham College, Glasgow College, and the various scientific Schools throughout the United Kingdom.

FURNITURE AND INTERIOR DECORATIONS.

53.

Royal 4to., Price £1. 1*s.*

CHIPPENDALE'S 133 DESIGNS OF INTERIOR DECORATIONS IN THE OLD FRENCH STYLES, for Carvers, Cabinet-Makers, Ornamental Painters, Brass-Workers, Modellers, Chasers, Silversmiths, General Designers, and Architects. Fifty Plates 4to., consisting of Hall, Glass, and Picture-Frames, Chimney-Pieces, Stands for China, &c., Clock and Watch Cases, Girandoles, Brackets, Grates, Lanterns, Ornamental Furniture, and Ceilings.

54.

15 Plates, 4to., Price 10*s.* 6*d.*

SPECIMENS OF THE CELEBRATED ORNAMENTS and INTERIOR DECORATIONS of the AGE of LOUIS XIV., selected from the magnificent work of Meissonnier.

55.

Price 15*s.* 18 Plates, on folio demy.

SHOP FRONTS AND EXTERIOR DOORS,

Displaying the most approved of London execution, and selected as being those of the best taste and greatest variety; drawn to a scale by accurate measurement, accompanied by the proper Sections and Plans, with several New Practical Designs: for the use of the Architect, Builder, and Joiner.

By T. KING.

56.

11 Plates, 4to., Price 7*s.*

CHIPPENDALE'S DESIGNS for Sconces, Chimney and Looking-Glass Frames, in the old French style: adapted for Carvers and Gilders, Cabinet-Makers, Modellers, &c.

57.

In large folio, 126 Plates, boards, Price £4. 4*s.*

ETCHINGS, representing the BEST EXAMPLES of ANCIENT ORNAMENTAL ARCHITECTURE, drawn from the Originals in Rome. FRAGMENTS of GRECIAN ORNAMENT. By C. H. TATHAM, Architect.

58.

On 33 folio Plates, engraved in imitation of Chalk Drawings, Price 15*s.*

ORNAMENTS DISPLAYED, on a full size for working, proper for all Carvers, Painters, &c., containing a variety of Accurate Examples of Foliage and Friezes.

59.

3 Parts, Price £1. 10*s.*

WORKING ORNAMENTS AND FORMS,

Full size, for the use of the Cabinet Manufacturer, &c., &c.

By T. KING.

Digitized by Google

Important Works on Engineering.

60.

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

These very valuable volumes, comprising 125 elaborately engraved Plates, are, in Sections, Elevations, Plans, Details, &c., of the highest utility to the Engineer and Student, to Manufacturers of Marine, Locomotive, and Land Engines;—the science of Steam Engine making being explained by the most eminent practical men of Britain. In 2 vols. 4to., and the Plates in folio, price £4. 4*s*., entitled

THE STEAM ENGINE;

Comprising an account of its invention and progressive improvement, with an INVESTIGATION of its PRINCIPLES, and the PROPORTIONS of its PARTS for EFFICIENCY and STRENGTH; detailing also its application to NAVIGATION, MINING, IMPELLING MACHINES, &c., and the Result in numerous Tables for Practical Use, with Notes, Corrections, and New Examples, relating to Locomotive and other Engines.

The algebraic parts transformed into easy practical Rules, accompanied by Examples familiarly explained for the Working Engineer, by Mr. WOOLHOUSE; with an ample

APPENDIX,

Containing, besides a vast acquisition of Practical Papers, an Elementary and Practical Description of Locomotive Engines now in use, illustrated by Examples; and the Principles and Practice of Steam, for the purposes of Navigation either in Rivers or at Sea; showing its present and progressive state, by illustration of the various Examples of Engines constructed for Sea, War, and Packet Vessels, and River Boats, by the most eminent Makers of England and Scotland, drawn out in Plans, Elevations, Sections, and Details, with a Scientific Account of each, and on

STEAM NAVAL ARCHITECTURE,

Showing, by existing and the latest Examples, the Construction of War, Sea, and Packet Vessels: their Naval Architecture, as applied to the Impelling Power of Steam for Sea and River purposes. This portion of the work is edited by several very eminent Ship Builders—

OLIVER LANG, Esq., of H. M. Dockyard, Woolwich.
J. FINCHAM, Esq., H. M. Dockyard, Chatham.
T. J. DITCHBURN, Esq., Blackwall.

The new subjects in this edition consist of the works of

Messrs. Boulton and Watt.
The Butterley Company.
Messrs. Maudslay, Sons, and Field.
Messrs. Seaward.
Robert Napier, Esq., Glasgow.
Messrs. Fairbairn and Murray.
William Morgan, Esq.
Messrs. Hall, Dartford.
Edward Bury, Esq., Liverpool.
Messrs. Hague.
Messrs. Claude, Girdwoord, and Co.
Messrs. R. Stephenson and Co., Newcastle upon Tyne.

LIST OF PLATES.

1. Isometrical projection of a rectangular steam boiler.
2. Two sections of a cylindrical steam boiler.
3. Brunton's apparatus for feeding furnaces by machinery.
4. High pressure engine with four-passaged cock.
5. Section of a double acting condensing engine for working expansively.
6. Section of a common atmospheric engine.
7. Represents the construction of pistons.
8. Parts of Fenton and Murray's double engine.
9. Apparatus for opening and closing steam passages.
10 (A.) 10 (B.) Parallel motions or combinations used to produce rectilinear motion from motion in a circular arc.
11. Plan and elevation of an atmospheric pumping engine for raising water from a mine.
12. Boulton and Watt's single acting engine.
13. Double acting engine for raising water.
14. ——————for impelling machinery, by Fenton, Murray, & Co.
15. Maudslay's portable engine.
16. Indicator for measuring the force of steam in the cylinder.
——Diagrams to illustrate the comparative stability of opposite classes of vessels.
17. Section of a steam vessel with its boiler in two parts.
18. Isometrical projection of a steam boat engine as first arranged by Boulton and Watt.
19. Section and plan of steam boat engine.
20. Side elevation and cross section of a steam carriage.
21. Kingston's valves.
—— blow-off valves.
—— injection valves.
—— hand pump valves.
22. Boilers of Her Majesty's steam vessel African.
23. Boilers of Her Majesty's steam frigate Medea.
24. Paddle Wheels of Morgan and Seaward.
25. Positions of a float of a radiating wheel, and also of a vertical acting wheel, in a vessel in motion.
26. Cycloidal paddle wheel fitted to the Great Western.
27, 28. Illustrate Captain Oliver's steaming and sailing.
29. Exhibits the various situations of a trial at sailing of the Medea, with the Caledonia, Vanguard, and Asia.
30. Side view of the engines of the Red Rover, and City of Canterbury, steam vessels.
31. Longitudinal section of ditto.
32. Cross section of engines of ditto.
33. Side elevation of the engine of the Nile steam ship.
34. Plan of the engine of the Nile.
35, 36. Cross sections of engines of the Nile.
37, 38, 39. Engines of Her Majesty's steam frigate Phœnix.
40. Engines of the Ruby Gravesend packet.
41. Section of one of the engines of the Don Juan Peninsula Company's packet.
42. Boilers of Her Majesty's ships Hermes, Spitfire, and Firefly.

Digitized by Google

43, 44, 45, 46. Elevation, plan, and two sections of the engines of the armed Russian steam ships Jason and Colchis.
47, 48. Hall's improvements on steam engines.
49, 50. Engines of Her Majesty's steam ship Megæra.
51, 52, 53, 54. Engines of the General Steam Navigation Company's William Wilberforce.
55 (A.) Longitudinal section of Humphrey's patent marine engine.
55 (B.) Longitudinal elevation of Humphrey's marine engine.
56 (A.) Midship section of the steam packet Dartford, showing a front elevation of a pair of Humphrey's engines.
56 (B). Plan of the engines of the Dartford.
57, 58, 59. Forty-five horse power engine, constructed by W. Fairbairn and Co.
60, 61, 62, 63. Ten-horse power engine, constructed by W. Fairbairn and Co.
64. Elevation of a locomotive engine, Stanhope and Tyne Railway; constructed by Messrs. R. Stephenson and Co., of Newcastle upon Tyne.
65. Section of ditto.
66. Safety valves of ditto.
67 (A). Cylinder cover and connecting rods of ditto.
67 (B). Cylinder and piston at large of ditto.
68. Plan and section of boiler seating for a twenty-horse engine, at the manufactory of Messrs. Whitworth and Co., Manchester.
69. Mr. Hague's double acting cylinder, with slides, &c.
70 (A). 70 (B). Sections of the engines of the Berenice East India Company's steam vessel.
71, 72. Beale's patent rotatory engine.
73. Mr. Ayre's contrivance for preventing a locomotive engine from running off a railway.
74 to 83. Relate to the very important subject of all kinds of paddle wheels, with experiments.
84 to 88. Sixty-five inch cylinder engine, erected by Messrs. Maudslay, Sons, and Field, at Chelsea Waterworks.
89 to 92. Patent locomotive engine, made by Messrs. R. Stephenson and Co. for the London and Birmingham Railway.
93. Drawings of the Comet, the first steam boat in Europe.
94. The Pacha's steam vessel of war, the Nile.
95, 96. The Hon. East India Company's steam vessel Berenice.
97. Draught of the Forbes steamer, Chinese rigged.
98. Herne Bay steam packet Red Rover.
99. Diamond Company's steam packet Ruby.
100 to 103. Her Majesty's steam vessel of war Medea.
104 to 107. Construction of the Nile steam ship, built for the Pacha of Egypt.
108, 109, 110. His Imperial Majesty's armed steam vessel Colchis.
111, 111 (A). Engines of the steam ship Tiger.
112. The Admiralty yacht Firebrand.
113. Portrait of the late Mr. Watt.
114. Portrait of the late Mr. Tredgold.
115, 117, 118. Illustrate steam navigation in America.

'The first publication of Mr. Tredgold's work, on one of the most important mechanical and scientific subjects of our age, was so highly successful, that, besides being translated into the French and other languages, a new edition was imperatively called for. That call has been answered by the present enlarged work, in which have been embodied the progress and improved application of that mighty agent Steam, an investigation of its principles, and a practical view of its uses and effects in steam vessels, steam carriages, and railroads. When we look around us and see the face of the country changed and changing; the expedition of a week compressed into a single day; the limits of pleasure and of business widely extended among all classes of society; new wants created, and new wishes gratified; sedentary easily and readily converted into ambulatory life; the sphere of city homes, as it were, enlarged by a circle of rural miles;—when, in fact, we see the prodigious alteration made in our social, statistical, economical, political, national, and international system, by the growing powers of this vast engine, we cannot but consider the effort to offer us a just and comprehensive account of it to be one of the most meritorious within the scope of individual industry, skill, and labour. We, therefore, think the public deeply obliged to Mr. Tredgold, the author, and Mr. Weale, the enterprising publisher, who must have expended a very large sum on the risk, for the very important volumes now before us.

'It is apparent that it is a publication of great magnitude and great worth. Above a hundred plates of steam engines, &c., &c., illustrate its descriptions; and many wood-cuts serve further to render the contents plain and intelligible to every capacity. Thus the actual operations of such men as Boulton and Watt, Maudslay and Field, Seawards, Napier of Glasgow, and other eminent mechanicians, and, we may add, enlightened philosophers as well as experienced artisans, are explained to us, and set before our eyes so as to be palpable to the understanding. In the same way the locomotives of the Messrs. Stephenson, of Newcastle, the construction of the elegant Government steam boats of Mr. Lang, of Woolwich, and Mr. Fincham, of Chatham, (vessels it is a delight to notice as we pass up or down the river,) are rendered familiar to us; and we care little to vex ourselves about hypothetical improvements and untried experiments. We have witnessed so many pseudo certain and undeniable inventions fail, that we have become rather sceptical when we hear of patents that are to supersede all that has been done before, or listen to the dictatorial laws of people whom we have known to be more frequently wrong than right. We are glad to observe, however, that in this new edition most of the errors of the former have been corrected; and what questionable statements or mistakes may remain are not such as to impeach the vast utility of the publication.

'The Appendix, indeed, is deserving of much praise. The rules of practice are well expounded, and the mathematical calculations, remodified into simple arithmetic, are excellent for the purpose of enabling the working man to perform his duty.

'Upon the whole, not to dwell upon either real or supposed imperfections, inseparable from a production embracing so vast a number of complicated matters—a production treating of things in an almost daily state of partial transition—we feel bound to pronounce this treatise to be a very able and satisfactory exposition of the state of steam navigation and railroad travelling to the present time; and as such we heartily recommend it to the public at large, both at home and on the continent, where its predecessor has hitherto been esteemed a standard work.'—*Literary Gazette, August* 3, 1839.

Digitized by Google

61.

STEAM NAVIGATION.

Just published, in Atlas folio size, uniform with Telford's works and the Atlas copies to Tredgold, Price £1. 12*s*.

APPENDIX A. AND B. TO THE NEW EDITION OF TREDGOLD ON THE STEAM ENGINE.

With Text in 4to.

CONTENTS OF PLATES.

1. Iron Steam Yacht *Glow-worm*, constructed by John Laird, Esq., Birkenhead, Liverpool.
2, 3. Iron Steam Ship *Rainbow*, belonging to the General Steam Navigation Company, draught lines at bottom, fore body to a large scale, by ditto.
4. Plans of the engines of 90-horse power each, 50-inch cylinders, 4-6 stroke, made by G. Forrester and Co., of Liverpool, and fitted on board of the *Rainbow*.
5. Side elevation and section of ditto.
6. Transverse section of ditto.
7. Draught of the American Armed Steam Ship *Fulton*. Half the main breadth, 17 feet: distance between the water lines, 2 feet; fore and after body precisely alike.
8. Plans of the upper and lower decks of the Admiralty Yacht *Firebrand*, showing the fittings and conveniences; drawn by Mr. Lang, of Woolwich.
9, 10. Plans of the upper and lower decks of the Iron Steam Ship *Nevka*, constructed for Her Imperial Majesty the Empress of Russia, by Messrs. Fairbairn and Co., of Mill Wall, Poplar.
11, 12. Draught, section, and lines of bottom of Her Imperial Majesty's Iron Steam Yacht *Nevka*.
13. Cross section of ditto, showing engines, construction of vessel, and paddles.
14. Body plan, cross section, and saloon; showing joinings, fittings, and decorations.
15. Mr. John Hague's twelve-horse condensing engine, in operation at the Arsenal of Woolwich; elevation, with dimensions of parts and references.
16. Longitudinal section, ditto, ditto.
17. Plan, ditto, ditto.
18. Section, showing boiler, &c., ditto.
19. End section, showing furnace, &c., ditto.
20, 21. Mr. Lang's mode of connecting the stem, stern post, and keel together, for any description of vessel; and Mr. Lang's method of framing the ribs and keels of Steam Vessels, with a plan of timbers expanded, sectional parts, with dimensions.
22. Chapman's draught lines of bottom, fore and aft bodies; and Mr. Whitelaw's, of Glasgow, new contrivances in the Steam Engine.

Several of these Plates are on large size, and consequently the more useful to practical men.

62.

In extra cloth boards, double lettered, Price 5*s*.

TREATISE ON THE IMPROVEMENT OF THE NAVIGATION OF RIVERS,

With a New Theory on the Cause of the Existence of Bars.

By WILLIAM ALEXANDER BROOKS, M.Inst.C.E.

63.

In 8vo., with two large Plates, and a Wood-cut explanatory of the invention, Price 2*s*. 6*d*.

A TREATISE ON THE ADAPTATION OF ATMOSPHERIC PRESSURE TO THE PURPOSES OF LOCOMOTION ON RAILWAYS.

By J. D'A. SAMUDA.

64.

Second Edition. In 8vo., boards, Price 6*s*.

METEOROLOGICAL OBSERVATIONS AND ESSAYS.

By JOHN DALTON, D.C.L., F.R.S., &c., &c.

Digitized by Google

65.

FLAX MACHINERY.

Preparing for Publication, an elaborate scientific and explanatory Work on the Machinery for Heckling, Making, and Spinning of Flax, for the many and valuable purposes for which it is used.

It is intended to publish this Work in 4 Parts, at 7*s.* 6*d.* each, in small Atlas folio size.

66.

In 2 Vols., very neatly half-bound in morocco or russia, gilt tops, Price £5. 5*s.*

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

67.

In 2 Vols., elegantly bound in russia or morocco, gilt leaves, Price £5. 15*s.* 6*d.*

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

*** This work has been selected as a Prize-book by the Institution of Civil Engineers, Colleges in which Engineering Science is taught, and several other Institutions, and by practical Engineers for presents to their Pupils.

68.

In 2 Vols., very neatly half-bound in red morocco, gilt tops; the Text in quarto, and the Plates printed separately on fine Columbier folio paper, Price £7. 7*s.*

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

69.

The Plates sold separately, on Columbier folio, very neatly half-bound in red morocco, gilt tops, Price £5. 5*s.*

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

*** In many instances purchasers of the work in 2 vols. have also possessed themselves of these Plates in a separate form, not only for practical use and reference, but as a Table-book, to exhibit the splendour of the Steam Machinery of Britain.

70.

In 8vo., with 2 Plates, Price 2*s.* 6*d.*

REPORT ON THE IMPROVEMENT OF THE RIVERS MERSEY AND IRWELL,

Between Liverpool and Manchester; describing the Means of adapting them for the Navigation of Sea-going Vessels.

By HENRY R. PALMER, F.R.S., Vice-Pres. Inst.C.E.

71.

In 4to. size, with four elaborately engraved Plates, and numerous Wood-cuts of Details, Price £1. 1*s.* in cloth boards.

DESCRIPTION OF THE LOCOMOTIVE STEAM ENGINE BY ROBERT STEPHENSON, Esq.

*** The above Work is affixed to the publication of the 2nd edition of Tredgold, and has been published separately for the use of those who desire a perfect knowledge of the Locomotive Engine separate from other Steam Engines. The description is both popular and scientific. The Engravings are large, and are unique examples of mechanical engraving. The wood-cuts, 40 in number, are explanatory of such details of the Engine as cannot be shown in the Elevation, Plan, Cross or Transverse Section; nor so well described in language as by the ocular demonstration of these, intermixed as they are with the descriptive text. It will be found that this extraordinary modern Engine, which owes its present improvements to the Stephensons, is made available to the million by being explained in the plainest language, and divested of mathematical formulæ.

Digitized by Google

72.

The Text in 1 large Vol. 8vo., and the Plates, 64 in number, in an Atlas folio Vol., cloth boards, Price £2. 5*s.*

PRACTICAL ESSAYS ON MILL WORK AND OTHER MACHINERY;

WITH EXAMPLES OF MODERN TOOLS, &c.

First Published by ROBERT BUCHANAN, M.E.; afterwards improved and edited by THOS. TREDGOLD, C.E.; and now re-edited, with the improvements of the present age,

By GEORGE RENNIE, F.R.S., C.E., &c., &c.

CONTENTS OF PLATES.

1 to 19. Consist of Plates of Mill Work and Machinery, published under the superintendence of the late Mr. Tredgold, and now reprinted.
20. Diagrams of Professor Willis on the teeth of wheels.
21. Bramah's original slide tool, with slide rest and head in one.
22. Bramah's lathe for turning spheres—elevation and end view.
23. Plan of do.
24. Messrs. Nasmyth, Gaskell, & Co.'s great boring lathe.
25. ——————— face turning lathe.
26. Mr. F. Lewis's foot lathe.
27. ——————— large boring lathe.
28. Messrs. Rennie's gun boring lathe.
29. Hicks's radial drilling machine.
30. Messrs. Nasmyth, Gaskell, and Co.'s wall side drilling machine.
31. ——————— double pillar drill.
32. ——————— small foot drill and hand drill.
33. Mr. F. Lewis's upright drilling and boring machine.
33 (A). Ditto, ditto.
34. Messrs. Nasmyth, Gaskell, and Co.'s key grooving machine.
35. Messrs. Sharp and Roberts' slotting machine.
36. Messrs. Nasmyth, Gaskell, and Co.'s machine for cutting key grooves in wheels.
37. ——————— for cutting slots in cranks.
37 (A). Mr. F. Lewis's slotting and paring machine.
38. Fox's screw cutting machine.
38 (A). Messrs. Nasmyth, Gaskell, and Co.'s large screw cutting machine.
38 (B). Hicks's bolt screwing machine.
39. Messrs. Nasmyth, Gaskell, and Co.'s self acting nut cutting machine.
40. Mr. F. Lewis's machine for cutting the teeth of small metal wheels.
40 (A). ——————— large metal wheels.
41. Messrs. Nasmyth, Gaskell, and Co.'s machine for cutting teeth of wooden models.
41 (A). M. Cavé's machine for cutting teeth of wooden and iron models .
42. Messrs. Nasmyth, Gaskell, and Co.'s vertical boring machine.
43. ——————— large ditto.
44. Hicks's boring machine.
45. M. Nicholas Forg's planing machine.
46. Messrs. Nasmyth, Gaskell, and Co.'s millwrights' planing machine.
47. Ditto, ditto.
47 (A). Hicks's planing machine.
47 (B). Ditto, ditto.
48. Messrs. Nasmyth, Gaskell, and Co.'s plate cutting and punching machine.
49. Messrs. Fairbairn and Co.'s plate bending, also Messrs. N. G. and Co.'s plate cutting, machines.
50. ——————— punching machine; also Hicks's expanding ring.
51. Messrs. Maudslay and Field's punching machine.
52. Ditto, ditto.
52 (A). M. Cavé's punching machine.
53. Messrs. Fairbairn and Co.'s riveting machine.
54. Messrs. Nasmyth, Gaskell, and Co.'s double face grinding machine.

Making altogether 64 Plates.

73.

In 8vo., Price 7*s.*

DE L'INFLUENCE DES CHEMINS DE FER, ET DE L'ART DE LES TRACER ET DE LES CONSTRUIRE.

Par SEGUIN AINE. *Paris.*

74.

In 24mo., extra cloth boards and lettered, *for the pocket*, Price 1*s.*

PRACTICAL RULES FOR THE MANAGEMENT OF A LOCOMOTIVE ENGINE;

In the Station, on the Road, and in cases of Accident.

By CHARLES HUTTON GREGORY, Civil Engineer.

75.

In 8vo., Vol. 1. Parts I. and II., and Vol. 2. Part I., with Plates, Price £1. 11*s.* 6*d.*, in boards.

A NEW SYSTEM OF CHEMICAL PHILOSOPHY.

By JOHN DALTON, D.C.L., F.R.S., &c., &c.

Digitized by Google

76.

Text in Royal 8vo., and Plates in Atlas folio, Price 15*s*.

PRACTICAL EXAMPLES OF MODERN TOOLS AND OTHER MACHINERY.

Being a Supplementary Volume to Mr. RENNIE's Edition of BUCHANAN 'On Mill Work and other Machinery,' by TREDGOLD.

The Work consists of 20 Plates elaborately drawn and engraved, and are the works of Messrs. Maclea and Marsh, Leeds; Messrs. Whitworth and Co., Manchester; &c.

LIST OF PLATES.

1. Large slide lathe—side elevation.
2. Gantry, saddle, compound rest, and face plates for large lathe—details.
3. Screwing machine—plan.
4. Screwing machine—side elevation.
5. Machine to cut nuts—plan and details.
6. Machine to cut nuts—side and end elevation.
7. Fluting machine—plan and side elevation.
8. Fluting machine—end elevation and details.
9. Planing machine, to plane both ways—end elevation.
10. Planing machine, to plane both ways—side elevation.
11. Small fluting machine and lathe—side elevation.
12. Small fluting machine—plan and details.
13. Screwing machine—end elevation and details.
14, 15. Front and side views of Messrs. Whitworth and Co.'s, of Manchester, improved planing machine, with double cutting tools, &c., for large work.
16, 17, 18, 19, 20. Several new machines of Messrs. Whitworth and Co., of Manchester, Mr. Lewis, &c.

77.

In folio size, an effective Print for framing, Price 3*s*. 6*d*.

THE IRON BRIDGE OVER THE RIVER TRENT, NEAR SAWLEY,

On the Line of the Midland Counties Railway.

Designed by CHARLES VIGNOLES, Esq., C.E., and drawn on stone by G. HAWKINS, Jun., from a drawing made by Mr. CHARLES LEWSEY, of the Butterley Company.

Cast and erected in the year 1839 by the Butterley Company, and published by their permission.

78.

Large folio size, Price 4*s*. 6*d*.

TELFORD'S CAST IRON BRIDGE, CALLED THE GALTON BRIDGE,

Erected over the new Line of the Birmingham Canal at Smethwick, in the county of Stafford.

Drawn by R. BRIDGENS.

Cast and erected by the Horsley Iron Works Company.

79.

8vo. with 19 Plates, in boards, Price 9*s*.

AN HISTORICAL AND SCIENTIFIC DESCRIPTION OF THE MODE OF SUPPLYING LONDON WITH WATER;

And a particular Account of the different Companies so engaged, with an Exposition of the Attempts to adopt other Modes; together with an Account of the Contrivances for supplying Cities in different Ages and Countries.

By the late WILLIAM MATTHEWS.

80.

In demy 8vo., numerous Wood-cuts, extra cloth bds., Price 8*s*.

AN ESSAY ON THE BOILERS OF STEAM ENGINES:

Their Calculation, Construction, and Management, with a view to the SAVING OF FUEL. Including Observations on Railway and other Locomotive Engines, Steam Navigation, Smoke Burning, Incrustations, Explosions, &c., &c. A New Edition, considerably enlarged and improved.

By R. ARMSTRONG, Civil Engineer.

Digitized by Google

81.

In 1 handsomely printed 4to. Vol., with very numerous Plates and Wood-cuts explanatory of the whole system of Gas Manufacture, in extra cloth boards, Price £1. 8*s*.

A PRACTICAL TREATISE ON THE MANUFACTURE AND DISTRIBUTION OF COAL GAS;

Containing explanations of the Chemical Changes which take place during the destructive distillation of Coal; Working Drawings and Experiments upon different kinds of Retorts, in which the best methods of treating the Coal are considered, with a view to make them practically useful to the Gas Engineer; Working Drawings and Explanations of Retort Houses, Chimneys, &c., calculated for the reception of any number of Retorts; Estimates and Examples.

Working Drawings and Explanations of the different Apparatus used in the Manufacture of Gas; amongst which are the Condensers, Dry and Wet Lime Purifiers, Wash Vessel, Hydraulic Valves, Station Meter, Gas-holders, Governor, and their Details.

Also, Rules and Formulæ for the calculation of the discharges of Gas from mains of different diameters and lengths, and under different pressures, with Tables of Reference.

Concluding with Remarks upon the Secondary Products, as Coke, Tar, Ammoniacal Liquor, &c., and the Manufacture of the Carbonate and Muriate of Ammonia.

By SAMUEL CLEGG, Jun., C.E.

82.

22 Plates, large folio, bound, Price £1. 1*s*.

THE HARBOUR AND PORT OF LONDON,

SCIENTIFICALLY, COMMERCIALLY, AND HISTORICALLY DESCRIBED;

Containing Accounts of the History, Privileges, Functions, and Government thereof; of its Extent, Divisions, and Jurisdictions, Municipal and Commercial; of its Docks, Piers, Quays, Embankments, Moorings, and other Engineering Works; Tidal and other Observations, and every other necessary information relative thereto, accompanied by Charts of the Port and its Dependencies, its Shoals and Soundings, surveyed by order of the Port of London Improvement Committee; Plans of Docks, Gates, Piers, Swivel Bridges, Methods of Mooring Vessels, &c.

By JAMES ELMES, Architect, Surveyor of the Port of London.

83.

Size 7 feet 2 inches by 3 feet 8 inches, Price £2. 12*s*. 6*d*. in sheets; kept mounted and folded in cases; also varnished, stretched, and framed in Maple and Rose-wood.

GREAT WESTERN RAILWAY.

The Splendid Map (made in 8 sheets) of the Line of the Great Western Railway, with the adjacent country, with other Railway communications, compiled and drawn to a large Scale under the direction of J. K. Brunel, Esq., F.R.S., Engineer of the Line.

By Mr. GEORGE ALFRED JERMYN, M.Inst.C.E.

84.

9 fine Plates, Price £1. 5*s*.

RAILWAY STATIONS.

FRANCIS THOMPSON'S (Architect) Executed Designs, made by express commission for the Directors of the North-Midland Railway, under the directions of Robert Stephenson, Esq., C.E.

LIST OF SUBJECTS.

Derby Station.
Wakefield Station.
Masboro' Station.
Belper Station.
Elkington Station.
Chesterfield Station.
Clay Cross Station.
Wingfield Station.
Swinton Station.

Digitized by Google

85.

Vol. 4, with 30 Plates and numerous Wood-cuts, in extra cloth boards, Price £1. 8s.

PAPERS ON SUBJECTS CONNECTED WITH THE DUTIES OF THE CORPS OF ROYAL ENGINEERS.

CONTENTS.

Memoir of the Professional Life of the late Captain Drummond. By Captain LARCOM, Royal Engineers.

Letter from Captain GEORGE THOMSON, E.I.C. Engineers, to Colonel PASLEY, Royal Engineers.

Memorandum of the Engineer Operations at the taking of Ghuznee, in July, 1839.

Notes on Brixen and Verona in 1838. By T. K. STAVELEY, Esq., late Captain Royal Engineers.

Notes on Shot Furnaces. By Lieutenant NELSON, Royal Engineers.

A description of a New Steam Apparatus for Drying Gunpowder, recently set up in the Royal Laboratory at Woolwich, as proposed by Lieut. CAFFIN, of the Royal Artillery.

Memoranda on Blasting Rock. By Major-General Sir J. F. BURGOYNE, K.C.B.

Passage of the Indus by the Bengal portion of the Army of the Indus. By Lieut. H. M. DURAND, Bengal Engineers.

On Lodging Troops in Fortresses at their Alarm Posts. By Lieutenant-Colonel REID, Royal Engineers.

Memoranda relating to the Well in Fort Regent, Jersey. By Major HARRY D. JONES, Royal Engineers.

Notes on the Island of Ascension. By Captain H. R. BRANDRETH, Royal Engineers.

Account of the Dam constructed across the Waste Channel at Long Island, on the Rideau Canal, in 1836. By Major BOLTON, Royal Engineers.

Engineer Details. By Lieutenant NELSON, Royal Engineers. For the most part collected at Bermuda between April, 1829, and May, 1833.

Notices on the New Victualling Establishment at Devonport. By Lieut. NELSON, in the absence of Major WORTHAM, and accompanying the Drawings of the Cast-Iron Roofs by the latter.

Safety-box for connecting a Locomotive Engine and Tender to the Train. By SAMUEL B. HOWLETT, Esq., Chief Draughtsman, Ordnance.

Description of a new Weigh-Bridge lately erected in Woolwich Dock-yard. By Lieutenant DENISON, Royal Engineers.

Description of a single Coffer-dam across the entrance of the new dock in Woolwich Dock-yard. By Lieutenant DENISON, Royal Engineers.

Notes on injecting Cement or Hydraulic Lime into leaky Joints of Masonry. By Lieutenant DENISON, Royal Engineers.

Notes on the Employment of Sand for Foundations in Marshy or Soft Soil. Compiled from an article in the Annales des Ponts et Chaussées for the year 1835.

Description of the Rolling Bridge at Fort Regent, Jersey.

Description of the Roof of the Chapel of the Royal Artillery Barracks at Woolwich, showing the failure of the principals, and the mode of restoring them. By Lieutenant DENISON, Royal Engineers.

Description of Wharf Cranes, made by the Butterley Company. Communicated by JOSEPH GLYNN, Esq., F.R.S.

Description of the Cast-Iron Bridge erected over the River Trent, near the confluence of the Trent and Soar, on the line of the Midland Counties Railway, and near the village of Sawley, in the county of Derby.

*** I have printed several over copies of the Memoir of Captain Drummond, out of respect to his memory, which may be had, gratis, by any friends of the deceased, or any Officers in the Corps of Royal Engineers; also by the Officers of the Bengal, Bombay, and Madras Engineers. J. W.

86.

Vol. 3, with several Plates, Price £1. 5s.

PAPERS ON SUBJECTS CONNECTED WITH THE DUTIES OF THE CORPS OF ROYAL ENGINEERS.

CONTENTS.

Memoranda relative to the Lines thrown up to cover Lisbon in 1810. By Colonel JOHN T. JONES, Royal Engineers.

Memoranda relating to the Defence of Cadiz, and explanatory details of the Position intrenched by the British troops under Lieutenant-General GRAHAM, in 1810.

Instructions of the Minister of War concerning the Model-towers approved of by Napoleon. Translated by Lieut. LAFFAN, Royal Engineers.

Report on the Demolition of the Revetments of some of the Old Works at Sheerness, on Saturday the 14th July, 1827.

Letter from Lieut.-Colonel ROBERT THOMSON to Lieutenant DENISON on the subject of Furnaces for heating Shot.

Memoir on Posen, by T. K. STAVELEY, Esq., late Captain Royal Engineers.

Report on Beaufort Bridge. By R. J. NELSON, Lieutenant Royal Engineers.

Rough Sketch of the Suspension Bridge over the

Digitized by Google

Lahn at Nassau. By R. J. Nelson, Lieutenant Royal Engineers.

Detailed Description of some of the Works on the Rideau Canal, and of the alterations and improvements made therein since the opening of the navigation. By Lieutenant Denison, Royal Engineers.

On the mode of Bending Timber adopted in Prussia. By R. J. Nelson, Lieutenant Royal Engineers.

Description of the Coffer-dam used in the Construction of the Piers of the Alexandria Aqueduct, being an abstract of a report addressed by Captain Turnbull to Lieutenant-Colonel Abert, and by him submitted to the House of Representatives of the United States.

Description of the one-arch Wooden-Bridge, of 205 feet span, at Paradenia, with an account of the execution of the work and the means employed in throwing it across the river Mahavillaganga, in the island of Ceylon. By Captain Oldershaw, Royal Engineers.

Description of a Series of Bridges erected across the river Ottawa, connecting the provinces of Upper and Lower Canada, and especially of a wooden arch of 212 feet span which crossed the main branch of the river. By Lieutenant Denison, Royal Engineers.

Description of a Barometer that requires no corrections either for Zero or for Temperature. By Samuel B. Howlett, Esq., Chief Draughtsman, Ordnance.

Notes to aid in correcting the operation of ascertaining the Heights of Mountains by means of Boiling Water; furnished by Major Ord, Royal Engineers.

On the Decomposition of Metallic Iron in Salt Water, and of its Reconstruction in a Mineral form. By Lieut.-Col. Reid, Royal Engineers.

Report on the Effect of Climate on Yorkshire Paving, communicated by Colonel Fanshawe, Royal Engineers.

Report of Paving Stables at Brighton.

Experiments tried at Quebec as to the Properties and adhesive qualities of Cements, by order of Colonel Nicolls, Commanding Royal Engineer, dated 17th November, 1834.

Proof of an Earthenware Pipe for Lieutenant Denison. By Mr. Bramah.

Description of a Drawbridge on the London and Birmingham Railway, at Weedon. By Captain Jebb, Royal Engineers.

Table of the Description and Weight of the Packages of various Articles of Traffic. By Major H. D. Jones, Royal Engineers.

Appendix.—Notes on Lintz.

87.

In 8vo., with Engravings and Wood-cuts, cloth bds. extra, Price 12*s*.

OUTLINE OF THE METHOD OF CONDUCTING A TRIGONOMETRICAL SURVEY,

For the Formation of Topographical Plans; and Instructions for Filling in the Interior Detail, both by Measurement and Sketching; Military Reconnaissance, Levelling, &c., &c.;

With the Explanation and Solution of some of the most useful Problems in Geodesy and Practical Astronomy; to which are added, a few Formulæ and Tables of general utility for facilitating their calculation.

By Captain FROME, Royal Engineers, F.R.A.S., & A.I.C.E.

88.

In 1 large and thick royal 8vo. Vol., with several Plates, extra cloth boards, Price £1. 10*s*.

PAPERS ON IRON AND STEEL,

Practical and Experimental, with copious illustrative Notes.

By DAVID MUSHET, Esq.,

Honorary Member of the Geological and the Quebec Literary and Historical Societies; of the Institution of Civil Engineers of London; Corresponding Member of the Wernerian Natural History Society, Edinburgh.

89.

In 4to., with 12 large folding Plates, extra cloth boards, Price 14*s*.

A PRACTICAL AND THEORETICAL ESSAY ON OBLIQUE BRIDGES.

By GEORGE WATSON BUCK, M.Inst.C.E.

Digitized by Google

90.

153 Plates, engraved in the best style of Art, half-bound in morocco, very neat, Price £4. 4*s*.

PUBLIC WORKS OF GREAT BRITAIN;

CONSISTING OF

Railways, Rails, Chairs, Blocks, Cuttings, Embankments, Tunnels, Oblique Arches, Viaducts, Bridges, Stations, Locomotive Engines, &c.; Cast-Iron Bridges, Iron and Gas Works, Canals, Lock-gates, Centering, Masonry and Brickwork for Canal Tunnels; Canal Boats; the London and Liverpool Docks, Plans and Dimensions, Dock-gates, Walls, Quays, and their Masonry; Mooring-chains, Plan of the Harbour and Port of London, and other important Engineering Works, with Descriptions and Specifications; the whole rendered of the utmost utility to the Civil Engineer and to the Student, and as Examples to the Foreign Engineer.

Edited by F. W. SIMMS, C.E.

This Work is on an Imperial folio size, the Drawings and Engravings have been executed by eminent Artists, and no expense has been spared in rendering it highly essential for practical use; also, as an ornamental Volume of important Engineering Works in several Parts of the Kingdom. There are some Plates in the Volume that may be preferred in Colours, viz., the elaborate subject of the Blisworth Cuttings, on the Birmingham Line, 18 Plates, geologically coloured; Glasgow and Gairnkirk Railway Cutting through Moss, geologically coloured, &c.; making 20 Plates, carefully coloured, and for which an additional £1. 1*s*. is charged.

The following is a list of the Authors whose works are comprised in the volume.

Brindley	Hartley	M'Adam	Telford
Brunel	Hosking	Palmer	Thomas
Buck	Jessop	Rennie	Tierney Clark
G. and R. Stephenson	Landmann	Rhodes	Walker.

91.

In Imperial 8vo. Second Edition, with Additions. 11 Plates, extra cloth boards, Price 8*s*.

A PRACTICAL TREATISE ON THE CONSTRUCTION OF OBLIQUE ARCHES.

By JAMES HART, Mason.

92.

Just ready, a Second, and much enlarged Edition, in royal 8vo. bds., with 11 Charts and a Meteorological Table, Price £1. 4*s*.

AN ATTEMPT TO DEVELOPE THE LAW OF STORMS,

By means of Facts arranged according to Place and Time; and hence to point out a Cause for the VARIABLE WINDS, with the view to PRACTICAL USE in NAVIGATION.

By Lieut.-Colonel W. REID, C.B. and R.E., and Lieut.-Governor of the Bermudas.

Some copies with the Charts in a separate Atlas form, Price £1. 8*s*.

93.

Royal 8vo., Price 7*s*. 6*d*.

AN ESSAY ON THE MODERN SYSTEM OF FORTIFICATION

Adopted on the Rhine and Danube, and followed in all the works constructed since the Peace of 1815, in Germany. Illustrated by a copious Memoir on the Fortress of Coblentz, and accompanied by beautiful Plans and Sections of the works of that place.

By Lieutenant-Colonel J. H. HUMFREY, K.S.F.,

Formerly of the Royal Artillery and Royal Staff Corps, and late Commanding Engineer to the Corps of Cantabria, Author of several Military Works, &c. Long resident in Germany, where he had opportunities of collecting information from the best sources.

Digitized by Google

94.

In the Press, a new and much improved Edition of the

TRANSACTIONS OF THE INSTITUTION OF CIVIL ENGINEERS.

Vol. 1, Price 30*s.*, extra cloth bds., containing a Portrait of the late President, Thos. Telford, Esq., with 27 finely engraved Plates, and numerous vignette embellishments of Portraits of Engineers and their Works.

LIST OF SUBJECTS.

Introduction, with illustrations.

An Account of the Harbour and Docks at Kingston-upon-Hull. By Mr. TIMPERLEY, Resident Engineer to the Hull Dock Company. Communicated by the President, JAMES WALKER, Esq., F.R.S., L. & E.

On the Locks commonly used for River and Canal Navigation. By W. A. PROVIS, Esq., M.Inst. C.E.

Improved Canal Lock. By J. FIELD, Esq., F.R.S., V.P. Inst.C.E.

On the strain to which Lock Gates are subjected. By Peter W. BARLOW, Esq., C.E.

On the Hot Air Blast. By J. B. NEILSON, Esq., Cor. M.Inst.C.E. Communicated in a Letter to the late President, THOMAS TELFORD, Esq.

On the Relation between the Temperature and Elastic Force of Steam, when confined in a Boiler containing Water. By JOHN FAREY, Esq., M.Inst.C.E.

On Ventilating and Lighting Tunnels, particularly in reference to the one on the Leeds and Selby Railway. By J. WALKER, Esq. F.R.S., L. & E., Pres. Inst.C.E.

Particulars of the Construction of the Lary Bridge, near Plymouth. By J. M. RENDEL, Esq., Cor. M.Inst.C.E.

An Abstract Account of Coals used in Coke Ovens and Retorts, and Coke produced from One Year's Work at the Ipswich Gas Works. Communicated by WILLIAM CUBITT, Esq. F.R.S., &c., V.P. Inst.C.E.

An Approximative Rule for calculating the Velocity with which a Steam Vessel will be impelled through still Water, by the Exertion of a given amount of Mechanical Power, or forcible Motion, by Marine Steam Engines. Communicated by JOHN FAREY, Esq., M.Inst.C.E.

On the Effective Power of the High Pressure Expansive Condensing Steam Engines commonly in use in Cornish Mines. By T. WICKSTEED, Esq., C.E. Communicated in a Letter to the President.

Description of the Plan of restoring the Archstones of Blackfriars' Bridge. By Mr. JAMES COOPER, A.Inst.C.E. Communicated in a Letter to the Secretary.

On the Force excited by Hydraulic Pressure in a Bramah Press; the resisting Power of the Cylinder, and Rules for computing the Thickness of Metal for Presses of various Powers and Dimensions. By PETER BARLOW, Esq., F.R.S., &c., of the Royal Military Academy.

An Account of some Experiments on the Expansion of Water by Heat. By the late T. TREDGOLD, Esq., M.Inst.C.E.

On procuring supplies of Water for Cities and Towns, by boring. Communicated by JOHN SEAWARD, Esq., M.Inst.C.E.

Some Account of several Sections through the Plastic Clay Formation in the vicinity of London. By WILLIAM GRAVATT, Esq., F.R.S., M.Inst. C.E.

Some Accounts of Borings for Water in London and its vicinity. By JOHN DONKIN, Esq., M.Inst.C.E.

Description of the Method of Roofing in use in the Southern Concan, in the East Indies. By Lieut. FRAS. OUTRAM, Bombay Engineers. Communicated in a Letter to the late President, T. TELFORD, Esq., by Major-Gen. Sir John Malcolm, G.C.B., &c., Governor of Bombay.

Experiments of the Resistance of Barges moving on Canals. By HENRY R. PALMER, Esq., V.P. Inst.C.E. Addressed to the late President, T. TELFORD, Esq.

An Elementary Illustration of the Principles of Tension and of the Resistance of Bodies to being torn asunder in the Direction of their length. By the late T. TREDGOLD, Esq., M.Inst.C.E.

Details of the Construction of a Stone Bridge erected over the Dora Riparia, near Turin. By Chevalier MOSCA, Engineer and Architect to the King of Sardinia, &c., &c. Drawn up and communicated by B. ALBANO, Esq., A.Inst.C.E.

Memoir on the use of Cast Iron in Piling, particularly at Brunswick Wharf, Blackwall. By Mr. MICHAEL A. BORTHWICK, A.Inst.C.E.

An Account of the new or Grosvenor Bridge over the River Dee at Chester.

An Account of some Experiments made in 1823 and 1824, for determining the Quantity of Water flowing through different shaped Orifices. By BRYAN DONKIN, Esq. F.R.A.S., V.P. Inst.C.E.

On the Changes of Temperature consequent on any Change in the Density of Elastic Fluids, considered especially with reference to Steam. By THOMAS WEBSTER, Esq., M.A., of Trinity College, Cambridge. Communicated by JAMES SIMPSON, Esq., M.Inst.C.E.

A Method of representing by Diagram and Estimating the Earthwork in Excavations and Embankments. By Mr. JOHN JAMES WATERSTON, A.Inst.C.E.

Remarks on Herm Granite. By FREDERICK C. LUKIS, Esq., of Guernsey, in reply to enquiries from the President; with some experiments

Digitized by Google

made by the latter on the wear of different granites. Communicated by the President.

Experiments on the Force required to fracture and crush Stones; made under the direction of Messrs. BRAMAH and SONS, for B. WYATT, Esq., Architect. Communicated by WILLIAM FREEMAN, Esq., A.Inst.C.E.

New Canal Boat Experiments. By JOHN MACNEILL, Esq., M.Inst.C.E., F.R.A.S., M.R.I.A.

95.

Vol. 2, Price 28*s*., extra cloth bds., containing 23 finely engraved Plates.

TRANSACTIONS OF THE INSTITUTION OF CIVIL ENGINEERS.

LIST OF SUBJECTS.

Account of the Bridge over the Severn, near the Town of Tewkesbury, in the County of Gloucester, designed by THOMAS TELFORD, and erected under his superintendence. By Mr. W. MACKENZIE, M.Inst.C.E.

A Series of Experiments on different kinds of American Timber. By W. DENISON, Esq., Lieut. Royal Engineers, F.R.S., A.Inst.C.E.

On the Application of Steam as a moving Power, considered especially with reference to the economy of Atmospheric and High Pressure Steam. By GEORGE HOLWORTHY PALMER, Esq., M.Inst.C.E.

Description of Mr. Henry Guy's method of giving a true Spherical Figure to Balls of Metal, Glass, Agate, or hard Substances. Communicated by BRYAN DONKIN, Esq., V.P.Inst.C.E.

On the expansive action of Steam in some of the Pumping Engines at the Cornish Mines. By WILLIAM JORY HENWOOD, Esq., F.G.S., Secretary of the Royal Geological Society of Cornwall, H. M. Assay-Master of Tin in the Duchy of Cornwall.

On the effective power of the High Pressure expansive condensing Engines in use at some of the Cornish Mines. By THOMAS WICKSTEED, Esq., M.Inst.C.E. A letter to the President.

Description of the Drops used by the Stanhope and Tyne Railroad Company, for the Shipment of Coals at South Shields. By THOMAS E. HARRISON, Esq., M.Inst.C.E.

On the Principle and Construction of Railways of continuous bearings. By JOHN REYNOLDS, Esq., A.Inst.C.E.

Wooden Bridge over the River Calder, at Mirfield, Yorkshire, designed and erected by WILLIAM BULL, Esq., A.Inst.C.E.

A Series of Experiments on the Strength of Cast Iron. By the late FRANCIS BRAMAH, Esq., M.Inst.C.E.

On certain Forms of Locomotive Engines. By EDWARD WOODS, Esq.

Account and Description of Youghal Bridge, designed by Alexander Nimmo. By JOHN E. JONES, Esq., A.Inst.C.E.

On the Evaporation of Water from Steam Boilers. By JOSIAH PARKES, Esq., M.Inst.C.E.

Account of a Machine for cleaning and deepening small Rivers, in use on the Little Stour River, Kent. By Mr. W. B. HAYS, Grad.Inst.C.E.

Description of the Perpendicular Lifts for passing Boats from one Level of Canal to another, as erected on the Grand Western Canal. By JAMES GREEN, Esq., M.Inst.C.E.

On the methods of Illuminating Lighthouses, with a description of a Reciprocating Light. By J. T. SMITH, Esq., Captain Madras Engineers, F.R.S., A.Inst.C.E.

Experiments on the Flow of Water through small Pipes. By W. A. PROVIS, Esq., M.Inst.C.E.

Experiments on the Power of Men. By JOSHUA FIELD, Esq., V.P.Inst.C.E., F.R.G.S.

Particulars of the Construction of the Floating Bridge lately established across the Hamoaze, between Torpoint in the County of Cornwall, and Devonport in Devonshire. By JAMES M. RENDEL, Esq., M.Inst.C.E., &c., &c.

APPENDIX.—Officers, Members, &c.

96.

Handsomely engraved on Steel, (size 16 inches by 10½ inches,) Price 2*s*. 6*d*.

A CHART OF THE HARBOUR AND PORT OF LONDON,

Exhibiting the River Thames, and the adjacent Docks from London Bridge to Bugsby's Hole, and including the Greenwich Railway, the Commercial Railway, and the commencement of the Croydon Railway.

In this Chart the Low-water Mark, Soundings, Shoals, and other important features, are inserted from the most recent surveys; and, from the care which has been exercised in indicating correctly the various Wharfs, Dock-yards, Warehouses, and Factories, on each side of the River, it will be found of great utility to all persons engaged in nautical or commercial pursuits.

Digitized by Google

97.

PUBLIC WORKS OF THE UNITED STATES OF AMERICA.

In 2 Parts, Imperial folio, very neatly put together in a portfolio, comprising the following very important Works:—

CONTENTS OF PLATES.

1 to 13. Philadelphia Gas-works; comprising elevations of building, roof, details, furnaces, retorts, sections of; gasometers, tanks, and details; hydraulic main pipes, &c., &c.; gas meters, washers, &c., &c., &c.
14. Elevation, section, and plan of the Reservoir Dam across Swatara, Pennsylvania, erected by the Union Canal Company.
15. Elevation, section, chamber, and plan of the Outlet Locks on the Schuylkill Canal at Plymouth, Pennsylvania.
16. Lock Gates and details of ditto.
17. Triangulation of the entrance into the Bay of Delaware, exhibiting the exact position of the capes and shoals, with reference to the site of the breakwater.
18. Map of the Delaware Breakwater, with the detailed topography of Cape Henlopen, with section of Breakwater.
19. Map of the Philadelphia Water-works.
20. Ground plan of the northern half of the Philadelphia Water-works.
21. Dam, end view of water-wheel, &c.
22. Dam, sections of; pier, &c.
23. Top view, side view, section, &c., of force pumps.
24. Improved stop cock, reducing pipe, circular pipe, double and single branch pipe, bevel hub pipe, &c.
25. Plan of a dam, Sandy and Beaver Canal; plan of abutment, cross section, gravelling, &c.
26 and 27. Plan, elevation, and cross section of a lift lock, Sandy and Beaver Canal.
28. Gate, front view; front view of falling gate, mitre sill, section, &c.
29, 30. Eastern division, and Sandy and Beaver Canal, Ohio, front view; foundation plan, end view, &c., of abutment.
31, 32. Plan of the Tye River Dam across James River, James River and Kanawha Canal.
33. Lock; plan of eight feet lift for the James River and Kanawha Canal; plan and sections.
34, 35. Plan of a wooden lock of eight feet lift, James River and Kanawha Canal; several sections.
36, 37. Plan of Rivanna Aqueduct; elevations, sections, transverse section, horizontal section at surface of water, plan of pier abutment and wing-walls, &c.
38. Farm Bridge, James River and Kanawha Canal; elevation, plan, longitudinal and cross section.
39, 40. Aqueduct over Byrd Creek, James River and Kanawha Canal; elevation, abutment of wings, horizontal section at surface of water, transverse section, &c.

Edited by WILLIAM STRICKLAND, Architect and C.E.
EDWARD H. GILL, C.E.
HENRY R. CAMPBELL, C.E.

The Plates are engraved in the best style of art by the Le Keuxs from elaborate drawings made expressly for the work. Care has been taken that each subject contains every dimension necessary to show proportion and parts of construction.

Price £2; and in an 8vo. Vol., Price 6*s.*, or together £2. 6*s.*,

REPORTS, SPECIFICATIONS, AND ESTIMATES OF PUBLIC WORKS OF THE UNITED STATES OF AMERICA.

Explanatory of the Atlas folio of detailed Engravings, elucidating practically these important Engineering works.

98.

Just published, in 8vo., bound, Price 3*s.* 6*d.*

THE PRACTICE OF MAKING AND REPAIRING ROADS;

OF CONSTRUCTING FOOTPATHS, FENCING, AND DRAINS;

Also a Method of comparing Roads with reference to the Power of Draught required; with Practical Observations, intended to simplify the mode of Estimating Earth-work in Cuttings and Embankments.

By THOMAS HUGHES, Esq., Civil Engineer.

Digitized by Google

99.

The New Work on Bridge Building.

Vol. 1, royal octavo, in 2 divisions, Price £1. 16*s.*, containing 380 pages of Text and 55 elaborately engraved Plates, with every detail and dimension for practical use, entitled,

THEORY, PRACTICE, AND ARCHITECTURE OF BRIDGES.

The THEORY and PAPERS by JAMES HANN, of King's College; PROFESSOR MOSELEY, M.A., King's College; ROBERT STEVENSON, C.E., Edinburgh; and T. HUGHES, C.E.

Vol. 2 will consist of a PRACTICAL ENGINEERING and ARCHITECTURAL TREATISE on BRIDGE BUILDING, by WILLIAM HOSKING, F.S.A., Architect and Civil Engineer, with 55 Plates, elaborately engraved.

The Work will be completed in 2 Vols., to contain 700 pages of Text, and illustrated by 110 Engravings of examples of Stone, Timber, Iron, Wire, and Suspension Bridges, from Drawings furnished by the principal Engineers of Great Britain and France.

Vol. 2 is preparing, and is to be published in 6 Parts, at intervals, in the course of the year. Parts 7 and 8, or 1 and 2 of Vol. 2, are already out, Price 6*s.* each.

*** This Work, when completed, will be found to be of a most valuable character, the highest talent having been engaged for the Engravings.

Atlas copies of the Plates may be had at Christmas next.

100.

In 8vo., with several Plates, Price 16*s.*

A TREATISE ON THE STRENGTH OF TIMBER, CAST IRON, MALLEABLE IRON, AND OTHER MATERIALS,

With Rules for Application in Architecture, Construction of Suspension Bridges, Railways, &c.; with an Appendix on the Powers of Locomotive Engines on Horizontal Planes and Gradients.

By PETER BARLOW, F.R.S., &c., &c.

101.

In 8vo., upwards of 500 pages, Price 8*s.*

AN ELEMENTARY INVESTIGATION OF THE THEORY OF NUMBERS,

With its Application to the Indeterminate and Diophantine Analysis, the Analytical and Geometrical Division of the Circle, and several other curious Algebraical and Arithmetical Problems.

By PETER BARLOW, Esq., F.R.S., M.Inst.C.E., and of several other Learned Societies and Academies.

102.

Second Edition, with Examples, Price 3*s.* 6*d.*

A SET OF PROJECTING AND PARALLEL RULERS,

For constructing Working Plans and Drawings in Isometrical and other Modes of Projection.

Invented by T. SOPWITH, Esq.

103.

8vo. volume, with a folding Plate, Price 5*s.*

ON THE SAFETY LAMP,

For Preventing Explosions in Mines, Houses Lighted by Gas, Spirit Warehouses, or Magazines in Ships, &c.; with Researches on Flame.

By SIR HUMPHREY DAVY, Bart.

Digitized by Google

104.

In 8vo., extra cloth boards, with Plates, a Second Edition, with considerable Additions, Price 18s.

A PRACTICAL TREATISE ON LOCOMOTIVE ENGINES UPON RAILWAYS;

The construction, the mode of acting, and the effect of Engines in conveying heavy loads; the means of ascertaining, on a general inspection of the Machine, the velocity with which it will draw a given load, and the results it will produce under various circumstances and in different localities; the proportions which ought to be adopted in the construction of an Engine, to make it answer any intended purpose; the quantity of fuel and water required, &c.; with Practical Tables, showing at once the results of the Formulæ: FOUNDED UPON A GREAT MANY NEW EXPERIMENTS made on a large scale, in a daily practice on the Liverpool and Manchester, and other Railways, with different Engines and Trains of Carriages. To which is added an APPENDIX, showing the expense of conveying Goods by means of Locomotives on Railroads.

By COMTE F. M. G. DE PAMBOUR.

105.

In demy 8vo., extra cloth boards, Price 12s.

THE THEORY OF THE STEAM ENGINE;

Showing the Inaccuracy of the Methods in use for calculating the Effects or the Proportions of Steam Engines, and supplying a Series of Practical Formulæ to determine the Velocity of any Engine with a given Load, the Load for a stated Velocity, the Evaporation for desired Effects, the Horse-power, the useful Effect for a given Consumption of Water or Fuel, the Load, Expansion, and Counter-weight fit for the Production of the Maximum useful Effect, &c. With an APPENDIX, containing concise Rules for persons not familiar with Algebraic Signs, and intended to render the use of the Formulæ contained in the work perfectly clear and easy.

By COMTE F. M. G. DE PAMBOUR.

106.

At Christmas will be published a New and Extended Edition, with Plates, 8vo.

A PRACTICAL TREATISE ON THE PRINCIPLES AND PRACTICE OF THE ART OF LEVELLING,

With Practical Elucidations and Illustrations, and Rules for Making Roads upon the principle of TELFORD; together with Mr. MACNEILL's Instrument for the Estimating of Roads, &c.
A work most essential to the Student.

107.

Wood-cuts, 8vo., Price 5s.

SECOND REPORT ON THE LONDON AND BIRMINGHAM RAILWAY,

Founded on an Inspection of, and Experiments made on, the Liverpool and Manchester Railway.

By PETER BARLOW, Esq., F.R.S., &c., &c.

108.

Third Edition. Folio, with a large Atlas of Plates, Price £4. 4s.

NAVAL ARCHITECTURE;

Or, the RUDIMENTS and RULES of SHIP BUILDING: exemplified in a SERIES of DRAUGHTS and PLANS; with Observations tending to the further Improvement of that important Art. Dedicated, by permission, to His late Majesty.

By MARMADUKE STALKARTT, Naval Architect.

Digitized by Google

COLONEL PASLEY'S WORKS.

109.

In 8vo., a Re-issue of the last edition, Price 8*s*.

ESSAY ON THE MILITARY POLICY AND INSTITUTIONS OF THE BRITISH EMPIRE.

110.

Second Edition, demy 8vo., much enlarged, Price 16*s*. cloth boards, (instead of £1. 4*s*.),

A COMPLETE COURSE OF PRACTICAL GEOMETRY AND PLAN DRAWING;

Treated on a Principle of peculiar Perspicuity. Adapted either for Classes, or for Self-Instruction. Originally published as the first volume of a Course of Military Instruction.

111.

2 vols. 8vo., with Plates and numerous Wood-cuts.

COURSE OF ELEMENTARY FORTIFICATION.

112.

In 8vo., re-issued, at 5*s*. in boards.

Observations on the Expediency and Practicability of Simplifying and Improving

THE MEASURES, WEIGHTS, AND MONEY

USED IN THIS COUNTRY,

Without materially altering the present Standard.

113.

Preparing, a New Edition, in demy 8vo., extra cloth boards, numerous Wood-cuts.

OBSERVATIONS ON LIMES, CALCAREOUS CEMENTS, MORTARS, STUCCOS, AND CONCRETE,

AND ON PUZZOLANAS, NATURAL AND ARTIFICIAL; TOGETHER WITH RULES DEDUCED FROM NUMEROUS EXPERIMENTS FOR MAKING AN ARTIFICIAL WATER CEMENT,

Equal in Efficiency to the best Natural Cements of England, improperly termed Roman Cements; and an Abstract of the Opinions of former Authors on the same Subjects.

114.

Part I., with several wood-cuts, Price 5*s*.

RULES, CHIEFLY DEDUCED FROM EXPERIMENT, FOR CONDUCTING THE PRACTICAL OPERATIONS OF A SIEGE.

Originally composed for the Use of the ROYAL ENGINEER ESTABLISHMENT at CHATHAM.

115.

In one vol. 8vo.

SEVERAL TRACTS ON THE ART OF BUILDING OF ALL KINDS,

Drawn up and printed with numerous Wood-cuts, as Elementary Principles, besides that of Practice, for the Royal Engineers.

*** Making together, when collected, 8 vols. of very valuable elementary and practical works.

Digitized by Google

116.

RAILWAYS.

In Imperial folio, 83 Engravings, with explanatory Text, containing the Specification of the Works as executed.

EDITED BY F. W. SIMMS, C.E.

Price £2. 12*s.* 6*d.* in half-morocco.—Subjects:

THE LONDON AND BIRMINGHAM RAILWAY—THE GREAT WESTERN RAILWAY—THE SOUTHAMPTON RAILWAY—THE GREENWICH RAILWAY—THE CROYDON RAILWAY—THE BIRMINGHAM AND BRISTOL THAMES JUNCTION RAILWAY—GLASGOW AND GAIRNKIRK RAILWAY. In 83 Plates, with Sections, Details, &c.

LONDON AND BIRMINGHAM RAILWAY.

1. Frontispiece—London Entrance to the Primrose Hill Tunnel.
2. Title-page, vignette—Railway Station at Watford.
3. Chimneys at Camden Town fixed Engine Station.
4. Entrance to Railway Station at Euston Grove—Vignette, page 1.
5. Euston Grove Station, ground plan.
6. Camden Town fixed Engine Station, ground plan.
7. Iron Roof—Euston Grove Station.
8. Stanhope Place and Park Street Bridges.
9. Bridge over the Regent's Canal.
10. Details of ditto.
11. London and Birmingham Railway—Harrow in the distance. Vignette, page 17.
12. London and Birmingham Railway—Watford Tunnel. Vignette, page 28.
13. Road Bridge over Railway.
14. Colne Viaduct.
15. Bridge over Excavation south of Watford Tunnel.
16. Box Moor Oblique Bridge.
17. North Church and Primrose Hill Tunnels—Cross Sections.
18, 19. Entrances to ditto—Vignettes, pages 31 and 34.
20 to 29. Working Section, Blisworth Excavations and Embankments.
30, 31. Undersetting of Rock in Blisworth Cuttings—Enlarged Scale.
32, 33. Plan and Elevation of Retaining Walls, Counterforts, Inverts, Drains, &c., in the Blisworth Cuttings.
34, 35. General Plan and Section of the Undersetting of the Rock in the Blisworth Cuttings.
36, 37. Plan, Elevation, and Section of the West End of the Blisworth Cuttings.
38 to 47. Plan, Elevations, and Details of the Kilsby Tunnel, Warwickshire.
48. Method of fixing the Fifty-pound Rails in the Chairs.
49. Method of fixing the Sixty-five-pound Rails in the Chairs.
50. Mr. Buck's Railway Chairs.
51. Plan of Siding or Passing Place.
52. Plans and Sections of a Twelve-feet Turn Rail.
53. Plan and Elevation of First Class Carriages.

GREAT WESTERN RAILWAY.

54. Plan and Elevation of the Brent Viaduct.
55. Sections of the Brent Viaduct.
56. Transverse Sections of the Brent Viaduct.
57. Plan and Elevation of Maidenhead Bridge.
58. Sections of Maidenhead Bridge.
59. Occupation Bridge over the Railway.

SOUTHAMPTON RAILWAY.

60. Bridge under Railway.
61. Plan of ditto.
62. Occupation Bridge in Embankment.
63. Occupation Bridge.
64. Elevation and Details of Earth-work and Timber Waggons.

GREENWICH RAILWAY.

65. Oblique Arch over Neckinger Road.
66. Sections of ditto.
67. Oblique Arch over Spa Road.
68, 69. Sections of ditto.
70. Viaduct of the Greenwich Railway.

CROYDON RAILWAY.

71. New Cross Bridge over Railway.
72. Method of fixing the Permanent Way.

BIRMINGHAM AND BRISTOL THAMES JUNCTION RAILWAY.

73. Cast-iron Arch Suspension Bridge over the Paddington Canal and the Railway.
74. Railway Gallery under the Canal, &c.

GLASGOW AND GAIRNKIRK RAILWAY.

75. Transverse Section at Robroyston Moss.

MISCELLANEOUS.

76. Comparison of the Transverse Section of numerous Railway Bars.
77. Comet Locomotive Engine.
78. Mr. Stephenson's Patent Locomotive Engine.
79. Railway Waggons.
80. Flat Rail with Flange.
81. Rail by Losh, Wilson, and Bell.
82. Hetton Rail.
83. Sidings or Passing Places.

117.

In 12mo., Price 2*s.* 6*d.* in boards.

RULES AND DATA FOR THE STEAM ENGINE,

BOTH STATIONARY AND LOCOMOTIVE;

And for RAILWAYS, CANALS, and TURNPIKE ROADS: being a Synopsis of a Course of Eight Lectures on MECHANICAL PHILOSOPHY; illustrative of the most recent modes of Construction, and an Exposition of the Errors to which Patentees and others are liable, from their not being acquainted with the practical departments of Engineering.

By HENRY ADCOCK, Civil Engineer.

Digitized by Google

118.

4to., with Plates, Price 15*s*.

A TREATISE ON RIVERS AND TORRENTS,

With the METHOD of REGULATING their COURSE and CHANNELS. By PAUL FRISI, Member of numerous Academies. To which is added an ESSAY on NAVIGABLE CANALS, by the same.

Translated by Major-General JOHN GARSTIN.

119.

New Edition, 8vo., with 35 Copper-plate Engravings, Price 16*s*.

A TREATISE ON ISOMETRICAL DRAWING,

As Applicable to Geological and Mining Plans, Picturesque Delineations of Ornamental Grounds, Perspective Views and Working Plans of Buildings and Machinery, and to General Purposes of Civil Engineering; with Details of Improved Methods of preserving Plans and Records of Subterranean Operations in Mining Districts.

By T. SOPWITH, Esq., M.I.C.E.

120.

Three vols. large 4to., numerous fine Plates, Price £3. 3*s*.

HISTORY OF MARINE ARCHITECTURE.

By JAMES CHARNOCK, F.S.A.

Illustrative of the Naval Architecture of all Nations from the earliest period, particularly British.

*** Charnock is a work essential to all who study the construction of ships, large and small craft, whether for war, packet, or mercantile purposes.

121.

Large Atlas folio, 17 very finely engraved Plates, Price £4. 14*s*. 6*d*.—A few copies only of proofs on India paper, Price £6. 6*s*.

SUSPENSION BRIDGES.

A SCIENTIFIC and an HISTORICAL and DESCRIPTIVE ACCOUNT of the SUSPENSION BRIDGE constructed over the MENAI STRAIT, in North Wales; with a brief Notice of CONWAY BRIDGE. From Designs by and under the direction of THOMAS TELFORD, Esq., F.R.S., L. and E., &c., &c., and ALEXANDER PROVIS, Esq., Resident Engineer.

122.

In 8vo., with two large folding Plates of Sections of Roads, Price 2*s*.

MAKING AND REPAIRING ROADS.

RULES for MAKING and REPAIRING ROADS, as laid down by the late THOMAS TELFORD, Esq., Civil Engineer. Extracted, with additions, from a Treatise on the Principles and Practice of Levelling.

By F. W. SIMMS, Surveyor and Civil Engineer.

123.

Plan and Elevation on a scale of 10 feet to 1 inch, Price 10*s*. On India Paper, Price 15*s*.

STAINES BRIDGE:

A fine Engraving by J. H. LE KEUX, under the direction of B. ALBANO, Esq., C.E., from his Drawing presented to the Institution of Civil Engineers, and made from the Original Drawings and Admeasurement, with permission of GEORGE RENNIE, Esq., F.R.S., the Engineer.

Digitized by Google

124.

Price 7*s.*

GLADWIN'S FINE ENGRAVING OF THE PATENT SELF-ACTING SLIDE LATHE,

Manufactured by Messrs. J. Whitworth and Co., Manchester.

125.

Price 5*s.*

GLADWIN'S FINE ENGRAVING OF A DRILLING AND BORING MACHINE.

By Messrs. Whitworth and Co., Manchester.

126.

Columbier size, Price 3*s.* 6*d.*

GLADWIN'S ELEVATION OF STEPHENSON'S PATENT LOCOMOTIVE ENGINE.

Printed on hard paper for colouring.

127.

Large folio, Price 7*s.*

GLADWIN'S SPLENDID ENGRAVING OF STEPHENSON'S PATENT LOCOMOTIVE ENGINE.

*** This is a master-piece of Mechanical Engraving, and may be considered unique in its execution.

128.

Price 7*s.*

GLADWIN'S SPLENDID ENGRAVING OF THE PATENT SELF-ACTING PLANING MACHINE.

By Messrs. Whitworth and Co., Manchester.

129.

Gilt frames and glazed, very neat, Price 11*s.* the pair.

PORTRAITS FRAMED AND GLAZED FOR AN OFFICE.

A Pair of Portraits of Geo. Stephenson, Esq., of Newcastle upon Tyne, and Robert Stevenson, Esq., of Edinburgh, Civil Engineers.

130.

Fine large print, Price 5*s.*

SHEER DRAUGHT OF HER MAJESTY'S STEAM SHIP OF WAR "MEDEA,"

Built by Oliver Lang, Esq. at Woolwich; first commanded by Captain H. Austin in the Mediterranean for nearly four years, and since on the North American station by Captain Nott.

Digitized by Google

131.

Large folio Plate, Price 5*s*.

THE "VESTAL" TRINITY YACHT.

Draught, Bottom, plan of Decks, fore and aft Bodies. Built by Messrs. Curling, Young, and Co. 272 Tons.

132.

Price 2*s*. 6*d*.

THE "NILE" STEAM EGYPTIAN SHIP.

Transverse Sections, showing its construction. Built by Messrs. Fletcher, Fearnell, and Co.

133.

Price £1. 1*s*.

THE "MONARCH."

Formerly the Leith and London Steam Packet, now belonging to the General Steam Navigation Company; consisting of 4 large folio Plates of Draught, Bottom, fore and aft Bodies, Longitudinal Section through, showing Interior Fittings, Berths, State and other Rooms, Machine Boilers, and every contrivance for comfort and safety. Upper Decks, Lower Decks, &c., with Dimensions.

134.

In 8vo., with Wood-cuts, Price 1*s*.

AN ESSAY ON SINGLE VISION.

By JOHN THOMAS WOODHOUSE, M.D., Fellow of Gonville and Caius College, Cambridge.

135.

In 12mo., extra cloth boards, Price 4*s*. 6*d*

POPULAR INSTRUCTIONS ON THE CALCULATION OF PROBABILITIES.

Translated from the French of M. A. QUETELET, with Notes, by RICHARD BEAMISH, Esq., C.E., F.R.S., &c.

SIR CHRISTOPHER WREN'S ARCHITECTURE.

136. Plan of his First Design of St. Paul's, 1*s*.

137. Elevation and Section of Bow Church, 1*s*. 6*d*.

138. Interior of St. Stephen's, Walbrook, 1*s*.

139. Section of St. James's Church, Piccadilly, 1*s*.

140. Roof of the Theatre at Oxford, 1*s*.

141. Plan for the Rebuilding of the City of London, 1*s*.

142. Elevation, Plan, and Section of the College of Physicians, London, 1*s*. 6*d*.

143. Elevation of the Tower and Spire of St. Dunstan's in the East, London—Elevation and Section of Chichester Spire, 1*s*. 6*d*.

144.

WESTMINSTER HALL.

Section from admeasurement by Mr. George Allan, (Clerk of the Works to Sir Robert Smirke, Architect to the late Renovation). Very neatly engraved by Mr. HAWKSWORTH. Folio size, 2*s*. 6*d*.

145.

SECTION OF ST. PAUL'S CATHEDRAL.

THE ORIGINAL SPLENDID ENGRAVING by GWYN, of the SECTION of ST. PAUL'S CATHEDRAL, decorated agreeably to the original intention of Sir Christopher Wren; a very fine large Print, showing distinctly the construction of that magnificent Edifice. Price 10*s*.

This is a magnificent Plate, the only one of its kind, showing constructively the genius of Sir Christopher Wren.

Digitized by Google

The following Prints, 8vo. size, are 6*d.* each; 4to. size, on India paper, 1*s.* each.

146. Mr. Greenough's Villa. 2. D. Burton.
147. Catholic Chapel. 2. Newman.
148. York Stairs' Water Gate. 1. I. Jones.
149. Somerset House, (Elevations, Interiors, and Views). 6. Chambers.
150. Society of Arts. 1. Adam.
151. College of Physicians. 2. Wren.
152. Newgate. 1. Dance.
153. Church of St. Peter le Poor. 1. Gibson.
154. East India House. 1. Jupp.
155. Ashburnham House. 2. I. Jones.
156. Church of St. George. 3. Hawksmoor.
157. Church of All Souls. 1. Nash.
158. Westminster Hall. 2. Nash.
159. Banqueting House. 1. I. Jones.
160. Mansion House. 1. Dance, &c.
161. County Fire Office. 1. Abraham.
162. University Club House. 1. Wilkins and Gandy.
163. Tower of Bow Church. 1. Wren.
164. Westminster Abbey Church. 6. Wren.
165. Hall, Christ's Hospital. 1. Shaw.
166. Carlton Palace. 5. Sir R. Taylor.
167. College of Physicians and Union Club House. 2. Sir R. Smirke.
168. Terraces in the Regent's Park. 2. Nash and D. Burton.
169. Council Office, &c. 1. Soane.
170. Bank of England. 3. Soane.
171. Law Courts, Westminster. 3. Soane.
172. House of Lords, &c. 3. Soane.
173. Colosseum, Regent's Park. 1. D. Burton.
174. Hanover Chapel. 1. Cockerell.
175. Temple Bar. 1. Wren.
176. House of Mr. Nash, &c. 2. Nash.
177. Belgrave and Eaton Squares. 2. Nash.
178. Mr. Kemp's Villa. 2. Kendall.
179. London, Southwark, and Waterloo Bridges. 6. Rennie.
180. Bridge of Blackfriars. 1. Mylne.
181. Bridge of Westminster. 2. Labelye.
182. King's Entrance, House of Lords, Section and Interior Views. 3. Soane.
183. Plan and Interiors of St. Stephen's, Walbrook. 2. Wren.
184. Plan and Interiors of Temple Church. 3. Wren.
185. Plans, Elevation, and Section of Custom House, London. 2. Laing.
186. Plan and Elevation of Uxbridge House. Vardy.
187. Plans, Elevations, Views, and Sections of St. Paul's Cathedral. 8. Wren.
188. Elevations and Sections of St. Martin's Church. 3. Gibbs.
189. Plan, Section, and Elevation of the Queen's Theatre. 2. Nash and Repton.
190. Plan and Elevation of the Diorama. Pugin and Morgan.
191. Plan, Elevation, and Interior View of Haymarket Theatre. Nash.
192. Plan, Side Elevation, and Interior of Westminster Abbey. 2.
193. Plan, Elevation, Section, and Interior of St. Mary Woolnoth. 2. Hawksmoor.
194. Plan, Elevation, and Section of St. Philip's, Regent Street. 2. Repton.
195. Plan and Elevation of Bethlem Hospital. Lewis.
196. Plan and Elevations of Burlington House. Lord Burlington and Colin Campbell.
197. Elevation and Sections of St. Bride's Church. 2. Wren.
198. Interiors of Sir John Soane's House. 2. Soane.
199. Plan, Elevation, and Section of St. Paul's, Covent Garden. Inigo Jones.
200. Elevation of the Royal Exchange. 2. Jerman.
201. Plan and Elevation of the Russell Institution.
202. Interior of the Mansion of Thos. Hope, Esq. 2. Hope.
203. Plan, Elevation, and View of the Library of the London Institution. 2. Brooks.
204. Plan, and Transverse and Longitudinal Sections of King Henry 7th's Chapel. 2. Begun 1502.
205. Plan, Elevations, Interiors, and Sections of Covent Garden Theatre. 6. Sir Robert Smirke.
206. Plan and Elevation of Sir John Nash's House. Nash.
207. Plan and Transverse Section of St. James's, Piccadilly. Wren.
208. Interior of Freemasons' Hall. Sandby.
209. Plan, Elevation, and Sections of St. Luke's Church, Chelsea. 2. Savage.
210. Elevations, Sections, and Plan of St. Pancras' Church. 3. Inwood.
211. Plan and Elevation of All Saints Church, Poplar. Hollis.
212. Elevation and Section of St. Dunstan's in the East. Wren.
213. Elevation and Section of Bow Church. Wren.
214. Plan and Elevation of St. Marylebone Church. Hardwicke.
215. Plan, Sections, and Interior of the Roman Catholic Chapel, Moorfields. 3. Newman.
216. Plan, and Garden Front of the British Museum (Old). Pouget.
217. Plan and Elevation of the Horse Guards. Kent.
218. Plan and Elevation of the Villa of James Burton, Esq. Burton.
219. View of the East side of Belgrave Square. Basevi.
220. Plan, View, Sections, and Interiors of Drury Lane Theatre. 6. B. Wyatt.
221. View of the Interior of the English Opera House. Beazley.
222. View of the Interior of the Amphitheatre, Westminster Bridge.

---

223. View of the Five Elliptical Arch Bridge across the Tweed at Kelso. Constructed by the late John Rennie, Esq., Civil Engineer. Large print, 5*s.*
224. View of the Centering of Blackfriars' Bridge, by R. Mylne. Engraved by the celebrated Piranési. Large print, 4*s.* 6*d.*
225. View of the Progress of the First Arch of New London Bridge, with Centering, 1*s.* 6*d.*
226. View of the Menai Suspension Bridge. By W. A. Provis, Esq., C.E., &c. Fine large print, India, 10*s.*
227. View of the Cast Iron Bridge across the Galton Canal. By R. Bridgens. Large size, 4*s.* 6*d.* India proofs, 6*s.*
228. View of Hammersmith Suspension Bridge. Finely engraved, large size, 5*s.*
229. Plan and Elevation of Shrewsbury Bridge, 1*s.* 6*d.*
230. Mr. Britton's Views of the West Fronts of 14 English Cathedrals, folio size, 8*s.*; aquatinted, 10*s.* 6*d.*
231. Mr. Britton's Series of Picturesque Views of the Interior of 14 Cathedrals, with a Border of Architectural and Sculptural Ornament, folio size, 8*s.*
232. Vardy's Perspective View of the Gothic Hall, Hampton Court, finely engraved, folio, 5*s.*
233. Mr. Coney's View of the Interior of the Cathedral at Milan, fine large print, 5*s.*
234. Geometrical Elevation of the West Front of the Cathedral of St. Paul's, London, before the fire; St. Stephen's, Vienna; Strasburg, Cologne, the Tower of Mechlin, and the Great Pyramid of Egypt, to one scale, folio print, 5*s.*
235. Plan of Westminster Hall and the adjacent Law Courts, 1*s.*
236. View of the West Front of the Propylæa at Athens, folio, 1*s.* 6*d.*
237. Map of Attica with part of Bœotia, improved from the observations of recent travellers, particularly by Captain Smith, R.N., 2*s.* 6*d.*
238. Portraits of Eminent Architects and Engineers, men who have done honour to Britain. Engraved in the best style by superior artists, folio and 4to. sizes, £1. 1*s.* the Set:

1. Sir Christopher Wren.
2. James Stuart.
3. Nicholas Revett.
4. Sir William Chambers.
5. James Watt.
6. Humphrey Repton.
7. Thomas Telford.
8. Thomas Tredgold.

239. Transverse Section of the Temple of Jupiter Olympius at Agrigentum, folio size, 1*s.* 6*d.*

Digitized by Google

Geology and Geography.

240.

Price in sheet, coloured, £1. 10s. Mounted on roller, or in case for the Library, £2. 2s.

A LARGE GEOLOGICAL MAP OF CENTRAL AND WESTERN EUROPE,

INCLUDING THE BRITISH ISLES, FRANCE, GERMANY, AND THE ADJACENT COUNTRIES.

Originally compiled by Dr. H. von Dechen (Professor in the Berlin University), with the addition of the most recent information respecting the Geology of the BRITISH ISLES and other Improvements

By W. HUGHES, F.R.G.S.

While "Geology," as is correctly observed by Sir John Herschel, "in the magnitude and sublimity of the objects of which it treats, undoubtedly ranks in the scale of the sciences next to Astronomy," it is also that department of learning which has the most direct and practical bearing upon the pursuits of industry. Agriculture, the art of constructing and repairing Roads, Canals, and Wells, Mining, Building, all depend for their successful pursuit upon a due knowledge in those engaged in such operations, and consequently in all those who are in any way (however remotely) interested in them, of the nature of the soils and rocks which constitute the materials to be employed in them, and of the localities in which those most suited for the required ends occur; and upon such a knowledge depends not only the ultimate success or failure of these undertakings, but also a due appreciation of the difficulties to be encountered in them and the expenses to be thereby incurred in their prosecution. The correct register of geological observations thus becomes of paramount importance, not only to professed geologists, but to all who would be considered as well-informed members of society; and hence the value and interest to all such of *Geological Maps*, which are the most simple and economical registers of geological facts. Geological Maps of such particular countries as have been observed with sufficient accuracy are abundant; but as the interest attaching to any one portion of history is heightened by viewing its connexion with other portions, and comparing the phenomena which they present in common, or noticing the points in which they differ from one another,—so the value of a knowledge of the geology of any one country is enhanced by its being made a portion, a chapter as it were, of the *comparative Geology* of other countries, and more particularly of those countries which are united with it by geographical proximity, or by ties of common interest.

The present Map is based upon the observations of the most eminent British and Foreign Geologists, and includes in a digested form the most recent of their labours. Its size is 35 inches by 26½ inches, dimensions which unite to convenience for reference the practicability of a scale sufficiently large to admit of the insertion of all the more important geological and geographical features of the countries delineated. In order to render it as much as possible an exhibition of the *Physical Geography* as well as the *Geology* of these countries, the names not only of the larger rivers, but also of their tributaries, as well as of smaller streams, have been inserted; and particular attention has been given to the correct indication of the numerous small groups and chains which form parts of the mountain-systems of Britain, France, Germany, Switzerland, and Italy. The elevation attained by the higher summits of each of the principal chains is specified in English feet. Exhibiting thus the geographical as well as geological features of the countries represented, the Map is well calculated to form a useful guide in the consideration of the various lines of Railroad which are either constructed or in progress throughout various parts of them.

The Map is handsomely engraved on steel, and the various geological formations are beautifully coloured in accordance with the system adopted in the most recent works of English geologists of eminence.

Digitized by Google

241.

A new Edition. One large sheet, very accurately coloured, Price 15*s.*

GEOLOGICAL STRUCTURE OF ENGLAND, IRELAND, AND SCOTLAND.

An Index Geological Map of the British Isles; constructed from published documents, communications of eminent Geologists, and personal investigation.

By JOHN PHILLIPS, F.R.S., G.S., Professor of Geology in King's College, London.

Engraved by J. W. LOWRY.

Mounted in a case, Price 18*s.*; on black roller, 22*s.*; mahogany do., 23*s.* 6*d.*

242.

The following MAPS, Engraved on Steel, compiled from the most accurate sources, have just been published.

An entire new MAP OF ENGLAND, WALES, AND SCOTLAND, showing all the Railways open and in progress, with the Stations on the Lines, size 52 inches by 40, plain, on 2 sheets	£0	12	0
Ditto, ditto, full coloured in Counties	1	1	0
Ditto, ditto, Geologically coloured	1	7	6
Ditto, coloured in Counties, mounted on linen to fold in a case for the Library, or on roller	1	11	6
Ditto, ditto, Geologically	2	6	0
Ditto, coloured in Counties, and surrounded with a New Statistical and Topographical Chart of the United Kingdom	2	5	0
The same Map, with Chart on strainer, in neat black frame and varnished	3	18	0
The Chart, showing the Statistics and Topography of the United Kingdom, may be had mounted on linen to fold, or on roller, separately	0	18	0
Ditto, ditto, in sheets	0	10	6

Mahogany Rollers and Varnishing will be charged each 3*s.* extra.

243.

THE OFFICIAL MAP AND SECTION OF THE BRIGHTON RAILWAY, produced under the direction of J. A. Rastrick, Esq., size 33 inches by 19½, containing the country from 30 miles north of the Thames to the English Channel, and from Maidenhead west to Chatham east. Price, in 1 large Sheet, coloured	0	3	0
Folded in linen case	0	4	0
Mounted on linen and folded for the pocket	0	6	0
Mounted on linen, with roll and ledge	0	5	6
Framed and Varnished in neat black frame for the Counting House, &c.	0	12	0

244.

THE NATIONAL MAP OF ENGLAND, to be completed in 58 sheets, size of each sheet 20 inches by 16. Drawn to a Scale of 3 miles to the inch, and showing all the Railways.			
No. I. containing Middlesex, and a large portion of Hertfordshire, Essex, Surrey, Kent, and part of Bucks, plain	0	1	0
Ditto, ditto, coloured	0	1	6
No. II. contains part of Surrey, Kent, and nearly the whole of Sussex, plain	0	1	0
Ditto, ditto, coloured	0	1	6

ALSO MAY BE HAD,

No. I. of the Geological Series of the above, with descriptive matter, and a separate Index, beautifully coloured	0	3	0

The Geology of the Map has been carefully laid down from the best authorities, and from actual observation, by Mr. SAMUEL HUGHES.

This Map will be the largest Geological Map published; every sheet is complete in itself.

245.

THE ENVIRONS OF LONDON, to the extent of 30 miles from the Post Office, mounted on linen for the pocket	0	2	6

This Map will be found the cheapest, and to contain the largest mass of information, yet produced.

Digitized by Google

246.

In Royal 4to., Parts I. and II.

ATLAS OF CONSTRUCTIVE GEOGRAPHY.

FOR THE USE OF STUDENTS.

By W. HUGHES, Esq., F.R.G.S., Professor of Geography in the College for Civil Engineers.

The importance of Maps in the study of Geography is universally admitted, but rather with a vague idea of their value than with any definite notion of the use to be made of them. The object of the present work is *to place before the student of Geography* the materials from which he may *construct for himself* the foundations of geographical knowledge. To effect this, he is required in the first instance to draw Maps representing the general geographical relations which all parts of the globe bear to one another, and afterwards Maps representing the physical and political features of the particular portions of the earth which it may be requisite to study in detail. He will thus impress on his mind a clear conception of the great outlines of Geography, of the relative situation and extent of mountains, plains, seas, rivers, kingdoms, towns, and other geographical features; and form a system to which those portions of Geography which relate to the moral and political condition of mankind may be at once referred, and classed in their proper order.

The first portion of this Atlas will be confined strictly to Physical Geography;—that part of the work comprised under this head will illustrate first the general Physical Geography of the two Continents, and afterwards in succession, in greater detail, that of Europe, Asia, Africa, America, Australasia, and the British Islands.

Each Map is accompanied by a correspondent *blank projection*, containing only the parallels and meridians, and on which the student is to draw the Map for himself, not merely *copying* it from the finished plates, but *constructing* it step by step, by referring every thing in it to latitude and longitude.

The descriptive letter-press which accompanies each Map enables the student to do this by a method explained in the work itself, which contains Tables showing the latitude and longitude of the most prominent points on the coast, together with the names of the islands, peninsulas, seas, gulfs or bays, straits,—highlands, mountains, and lowlands,—and of the lakes and rivers, contained in the various parts of the globe, their places in the Map being referred to by means of latitude and longitude. The heights of mountains or table-lands above the sea, the elevation and depth of lakes, the nature and extent of deserts, the mineralogical character and climate of particular parts of the earth, and other information relating to Physical Geography, are also given. These portions of the work, as well as the Maps, have been prepared with the most rigid accuracy, and with reference to the constantly increasing amount of geographical knowledge.

The portion of the work relating to Physical Geography will be completed in eight Parts, the average price of which will not exceed 2*s.* 6*d.* per Part. The Maps of the continental divisions of the earth will all be drawn upon *the same scale*, a plan which has not hitherto been pursued in any Atlas, but which is the only one which can enable a student to acquire correct ideas of the *relative magnitude* of different countries, and prevent him from confounding the similarity of size in the representation with the actual magnitude of the countries themselves.

Part I. contains THE EASTERN HEMISPHERE, with a blank projection and descriptive letter-press, price 3*s.* 6*d.* Part II. THE WESTERN HEMISPHERE, &c., price 2*s.* 6*d.* Part III., containing EUROPE, &c., will be published on the 1st of October.

To meet the views of those who may wish to avail themselves of the Maps as Geographical Exercises, without using the descriptive parts of the work, the Maps and Blank Projections are also published separately. These alone will constitute a complete and entirely new Series of

OUTLINE MAPS,

Adapted either for the use of Schools or for Private Tuition. No. I., containing THE EASTERN AND WESTERN HEMISPHERES, with two Blank Projections, has been recently published. No. II., containing EUROPE and ASIA, will appear on the 1st of October. To be completed in 5 Numbers, price 2*s.* each.

Digitized by Google

247.

To be published in Parts, Price 3*s*. each,

HAND-BOOK FOR PLAIN AND ORNAMENTAL MAPPING AND ENGINEERING DRAWING:

To Contain also Designs and Fac-similes of Writing and Printing for Titles and Descriptions of Civil and Mechanical Engineering Drawing.

By BENJAMIN P. WILME, C.E.

248.

THE ELGIN MARBLES.

To be Published by Subscription, when 100 Names are obtained,

A NEW EXPLANATION OF THE GREAT COMPOSITIONS OF PHIDIAS

IN THE TWO PEDIMENTS OF THE PARTHENON ON THE ACROPOLIS OF ATHENS,

Founded upon the Remains of the Statues now in the British Museum, and those which are still upon the Temple.

By the CHEVALIER P. O. BRÖNDSTED,

Conseiller intime de Légation of H. M. the King of Denmark; Director of the Royal Cabinet of Coins and Medals at Copenhagen, and Member of several Academies.

The Editors of this work are persuaded that it can scarcely fail to meet with a favourable reception, as well from those classes which are indebted to the genius of ancient Greece, and of Athens in particular, for the best part of their own instruction and refinement, as from the public at large, who pride themselves on the possession of these beautiful relics of Phidias and his school.

The early appearance of the volume, for the Illustration of which from twenty-five to thirty copper-plate engravings, some of them works of great labour, will be required, must necessarily depend on the success of the Subscription; but it is confidently expected that it will be published in the course of the present year.

The letter-press will comprise about fifteen or sixteen sheets of imperial quarto; and the price to Subscribers will be £3. 10*s*. No copies will be printed on a larger paper.

The greater part of the Plates, illustrative of the Book, will be by the hand of Mr. CORBOULD, a name already celebrated for the drawings and engravings of the Athenian Marbles, in the publications of the Trustees of the British Museum.

PRINTED BY W. HUGHES, KING'S HEAD COURT, GOUGH SQUARE.

Digitized by Google

Digitized by Google

To renew the charge, book must be brought to the desk.

Digitized by Google

UNIVERSITY OF MICHIGAN
3 9015 00722 2147

72

B 474581

Digitized by Google

Digitized by Google